

### Features

- DC to 4 GHz
- Terminal for lead attachment
- Low VSWR
- Aluminum Nitride ceramic

### Applications

- Drop in isolators
- RF amplifiers

## CHF1206CNT Series 20 W Power RF Chip Termination

#### General Specifications


Substrate.....ALN  
 Resistive Film.....Thick Film  
 Terminals.....PtAg\*  
 Resistance.....50 Ω  
 Tolerance.....±5 %  
 Packaging .....100 pcs./bag

#### Absolute Ratings


Power.....20 W  
 Frequency.....DC-4 GHz  
 VSWR .....1.25 Maximum

\*Default, other finish options available (see How to Order section).

#### Characteristic Curve

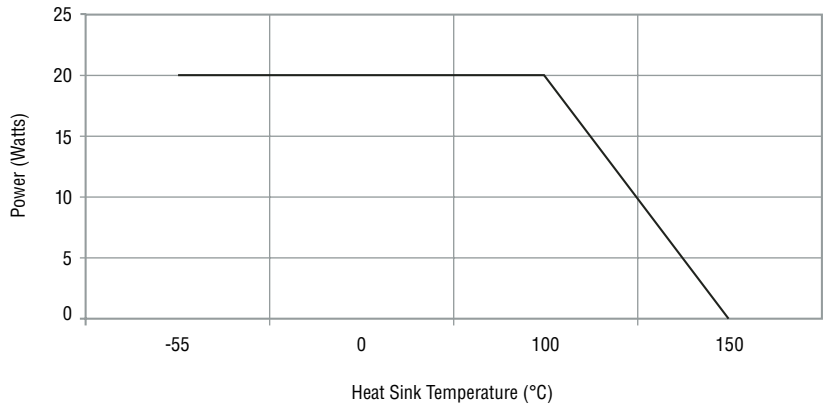

#### Product Dimensions

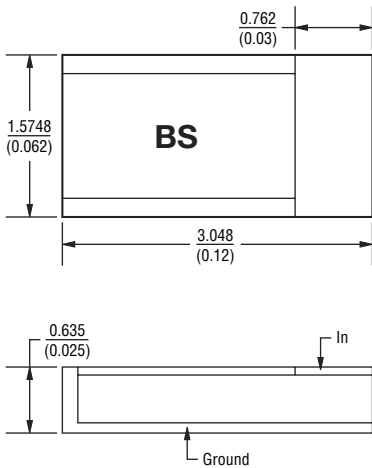

DIMENSIONS =  $\frac{\text{MILLIMETERS}}{\text{(INCHES)}}$

#### How To Order

**CHF 1206 C N T 500 L Y**

Model \_\_\_\_\_

Size \_\_\_\_\_

Version \_\_\_\_\_

Substrate \_\_\_\_\_

Mount \_\_\_\_\_  
 T = Tab

Value \_\_\_\_\_  
 500 = 50 Ohm

Function \_\_\_\_\_  
 L = Termination

Finish \_\_\_\_\_  
 Y = Pt Ag (Default)  
 Z = Sn Pb  
 X = Ni Au



*Reliable Electronic Solutions*

#### Asia-Pacific:

Tel: +886-2 2562-4117  
 Fax: +886-2 2562-4116

#### Europe:

Tel: +41-41 768 5555  
 Fax: +41-41 768 5510

#### The Americas:

Tel: +1-951 781-5500  
 Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)

\*RoHS Directive 2002/95/EC Jan 27 2003, including Annex  
 Specifications are subject to change without notice.  
 Customers should verify actual device performance in their specific applications.