




- **SAW Frequency Stabilization**
- **Fundamental-Mode Oscillation at 583.00 MHz**
- **0.8" x 0.5" x 0.25" Metal Dip Case**

This general-purpose oscillator is stabilized by surface-acoustic-wave (SAW) technology. Fundamental oscillation at 583.0 MHz eliminates all internally generated spurious outputs except integral harmonics of 583.0 MHz. The compact size of the rugged, metal, hermetically-sealed case makes this oscillator suitable for a variety of applications.

HO1077

583.00 MHz SAW Oscillator



Dip 14-8 Case

Absolute Maximum Ratings

Rating		Value	Units
DC Supply Voltage		0 to +13	VDC
Ambient Temperature	Powered	-40 to +70	°C
	Storage	-40 to +85	

Electrical Characteristics

Characteristic		Sy	Notes	Mini-	Typical	Maxi-	Units
Operating Frequency	Absolute Frequency	f_O	1, 7	582.600	583	583.400	MHz
	Tolerance from 583 MHz	Δf_O				± 400	kHz
RF Output Power		P_O	3, 6	+10	+13	+15	dBm
Spurious Outputs	Second Harmonics		3, 6, 7			-15	dBc
	Third and Higher Harmonics					-20	
	Nonharmonic				<-80	-60	
RF Impedance	Nominal Impedance	Z_O	3		50		Ω
	Operating Load VSWR	Γ_L	3, 5			1.5:1	
DC Power Supply	Operating Voltage	V_{CC}	3, 6	9.50	10.0	10.50	VDC
	Operating Current	I_{CC}			35	40	mA
Operating Ambient Temperature		T_A	3, 6	-30		+70	°C
Lid Symbolization (YY=Year, WW=Week)		RFMHO1077 YYWW					




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling. COCOM CAUTION: Approval by the U.S. Department of Commerce is required prior to export of this device.


Notes:

1. One or more of the following United States patents apply: 4,616,197; 4,610,681; and 4,761,616.
2. Unless noted otherwise, all specifications are listed at $T_A = +25^\circ\text{C} \pm 2^\circ\text{C}$, $V_{CC} = \text{nominal voltage} \pm 0.01 \text{ VDC}$, and load impedance = 50Ω with VSWR $\leq 1.5:1$.
3. The design, manufacturing process, and specifications of this device are subject to change without notice.
4. Applies to oscillator only and not to sidebands caused by external electrical or mechanical sources. (Dedicated external voltage regulation with low-frequency filtering for the DC power supply and proper circuit board layout are recommended for optimum spectral purity.)
5. For specified maximum operating load VSWR (any angle) at F_O . (No instability or damage will occur for any passive load impedance.)
6. For any combination of V_{CC} and T_A within the specified operating ranges.
7. Applies for any combination of Note 5 and 6 conditions.

BLOCK DIAGRAM




ELECTRICAL CONNECTIONS

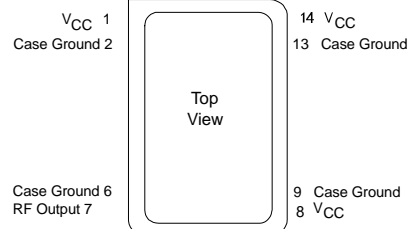


DIP14-8

Metal Dual-Inline Package with 8 leads in a 14-lead DIP configuration

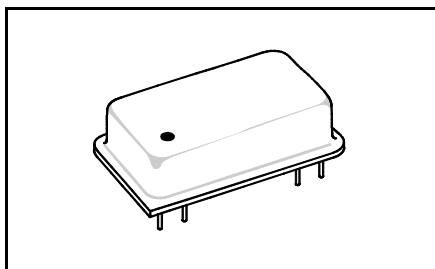

Dimension	mm		Inches	
	MIN	MAX	MIN	MAX
A	—	20.45	—	0.805
B	—	12.83	—	0.505
C	—	6.35	—	0.250
D	0.40	0.51	0.016	0.020
E	0.64 Nominal		0.025 Nominal	
F	7.62 Nominal		0.300 Nominal	
G	2.54 Nominal		0.100 Nominal	
H	15.24 Nominal		0.600 Nominal	
K	5.97	6.73	0.235	0.265
L	1.30	—	0.051	—
M	—	11.18	—	0.440
N	—	18.80	—	0.740
R	1.75	2.26	0.069	0.089

Top View

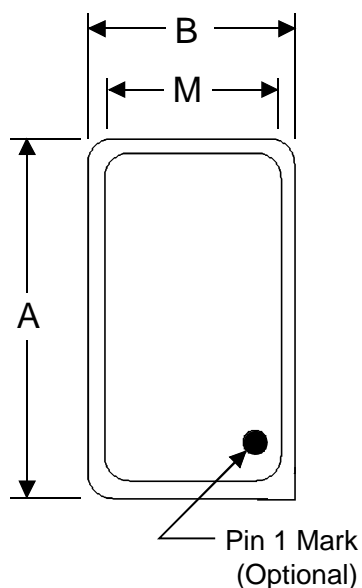

Bottom View

