



<TENTATIVE>

2MBI150UA-120 (Target specification)

1. Outline Drawing (Unit : mm)

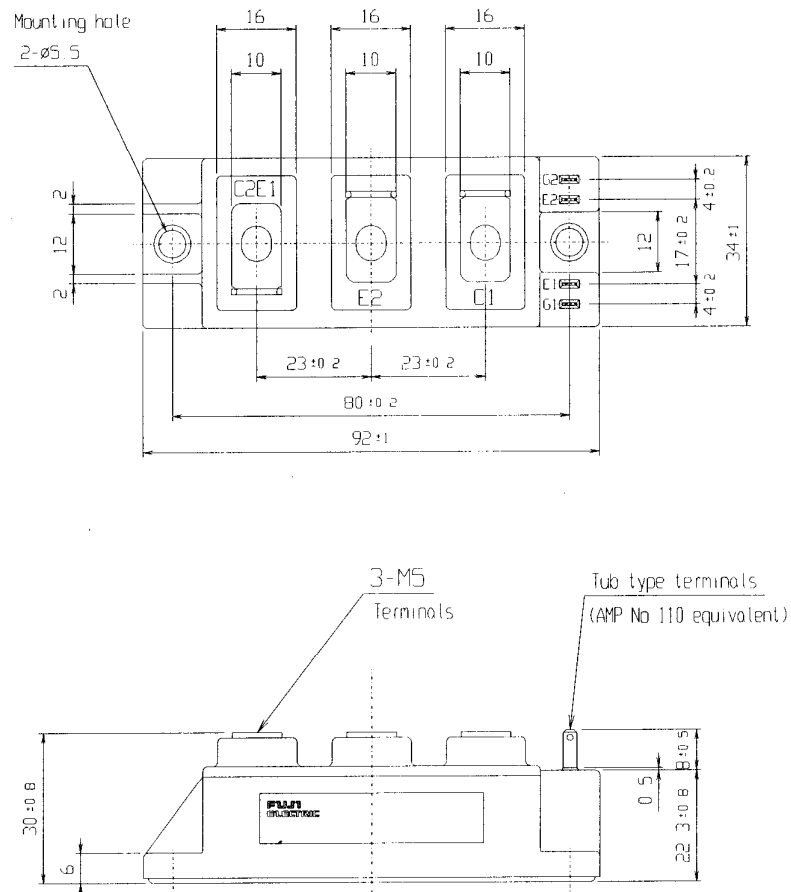

2. Equivalent circuit

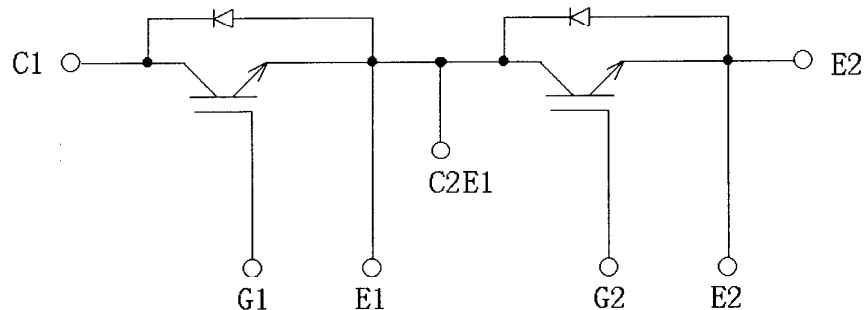

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS					Fuji Electric Co., Ltd.		
	DRAWN	Mar. -18-'62	J. Kobayashi		DWG. NO.	MT5F12221	1/4
	CHECKED	Mar. -18-'62	S. Kato				
			J. Miyasaka				

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

3. Absolute Maximum Ratings (at Tc= 25C unless otherwise specified)

Items	Symbols	Conditions		Maximum Ratings	Units
Collector-Emitter voltage	V _{CES}			1200	V
Gate-Emitter voltage	V _{GES}			+20	V
Collector current	I _c	Continuous	T _c =25C	200	A
			T _c =80C	150	
	I _c pulse	1ms	T _c =25C	400	
			T _c =80C	300	
	-I _c			150	
	-I _c pulse	1ms		300	
Collector Power Dissipation	P _c	1 device		780	W
Junction temperature	T _j			150	C
Storage temperature	T _{stg}			-40~ +125	C
Isolation voltage(*1)	V _{iso}	AC : 1min.		2500	V
Screw Torque	Mounting(*2)			3.5	Nm
	Terminals(*2)			3.5	

(*1) All terminals should be connected together when isolation test will be done.

(*2) Recommendable Value : 2.5~3.5 Nm (M5)

4. Electrical characteristics (at Tj= 25C unless otherwise specified)

Items	Symbols	Conditions		Characteristics			Units
				min.	typ.	Max.	
Zero gate voltage Collector current	ICES	VGE = 0 V,	VCE = 1200 V	-	-	1.0	mA
Gate-Emitter leakage current	IGES	VCE = 0 V,	VGE = +20 V	-	-	0.2	uA
Gate-Emitter threshold voltage	VGE(th)	VCE = 20 V,	Ic = 150 mA	TBD	7.0	TBD	V
Collector-Emitter saturation voltage	VCE(sat) (Terminal)	VGE = 15 V Ic = 150 A	TJ = 25 C	-	1.95	TBD	V
			TJ = 125 C	-	2.2	-	
	VCE(sat) (Chip)		TJ = 25 C	-	1.75	-	
			TJ = 125 C	-	2.0	-	
Input capacitance	Cies	VGE = 0 V		-	TBD	-	pF
Output capacitance	Coes	VCE = 10 V		-	TBD	-	
Reverse transfer capacitance	Cres	f = 1 MHz		-	TBD	-	
Turn-on time	ton	Vcc = 600 V		-	TBD	1.2	us
	tr	Ic = 150 A		-	TBD	0.6	
	tr(i)	VGE = +15 V		-	TBD	-	
Turn-off time	toff	RG = 2.2 Ω		-	TBD	1.0	
	tf			-	TBD	0.3	
Forward on voltage	VF (Terminal)	IF = 150 A	TJ = 25 C	-	2.0	TBD	V
			TJ = 125 C	-	2.0	-	
	VF (Chip)		TJ = 25 C	-	1.8	-	
			TJ = 125 C	-	1.8	-	
Reverse recovery time	trr	IF = 150 A		-	-	0.35	us

5. Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	Max.	
Thermal resistance (1 device)	Rth(j-c)	IGBT			0.16	C/W
		FWD			0.24	
Contact Thermal resistance	Rth(c-f)	with Thermal Compound (*)		0.05		

* This is the value which is defined mounting on the additional cooling fin with thermal compound.


Note :

This specification is only for technical considerations, and not for contract.
This specification is subject to be changed without notices.


REVISIONS	DATE	NAME	APPROVED	Fuji Electric Co.,Ltd			
	-			DWG.NO.	MT5F12221	2/4	
	-						

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

U-series 1200V/150A VCE vs. I_c
(Chip)

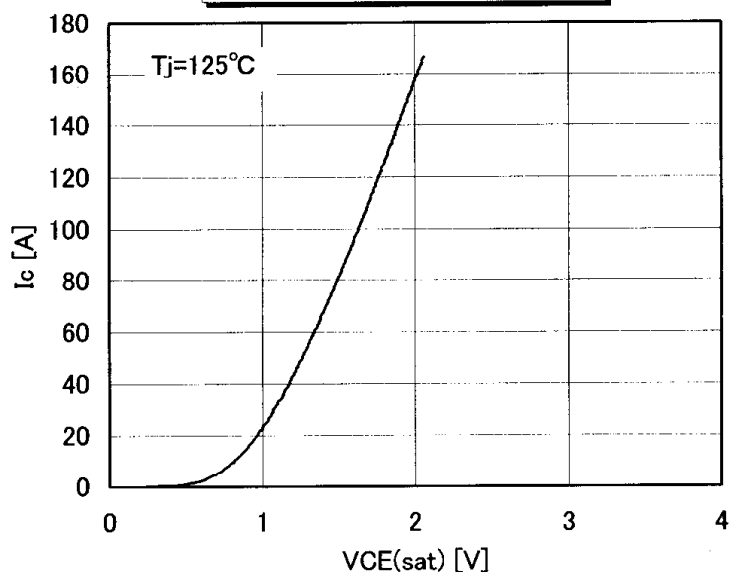

U-series 1200V/150A VF vs. I_F
(Chip)

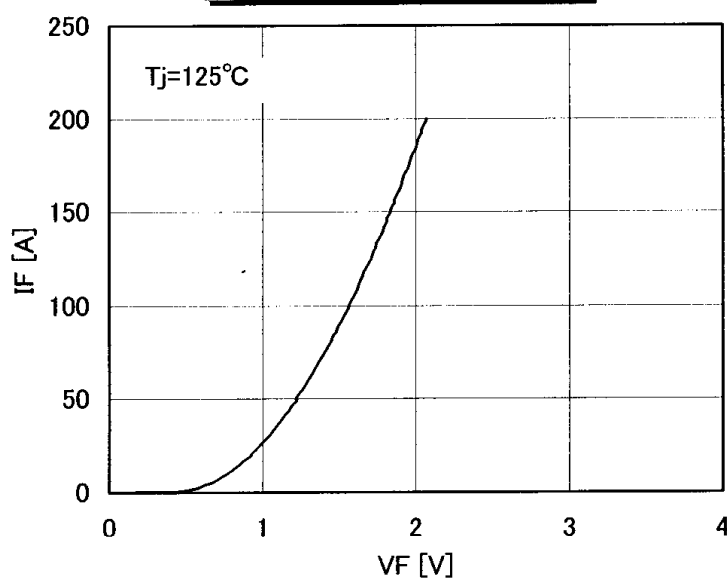


REVISIONS				


	DATE	NAME	APPROVED	Fuji Electric Co.,Ltd.		
	DRAWN	- -		DWG.NO.	MT5F12221	3/4
	CHECKED	- -				

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

U-series 1200V/150A SW-loss vs. I_c

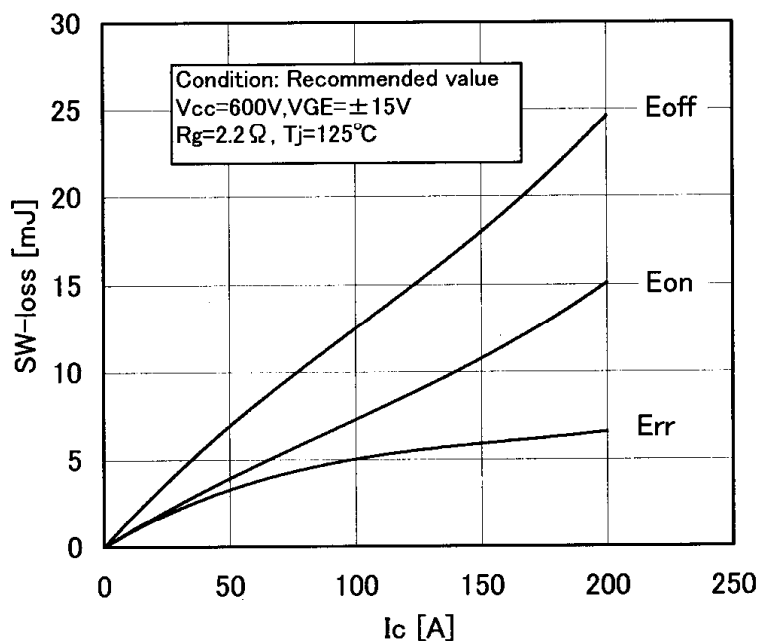

U-series 1200V/150A $R_{th}(j-c)$

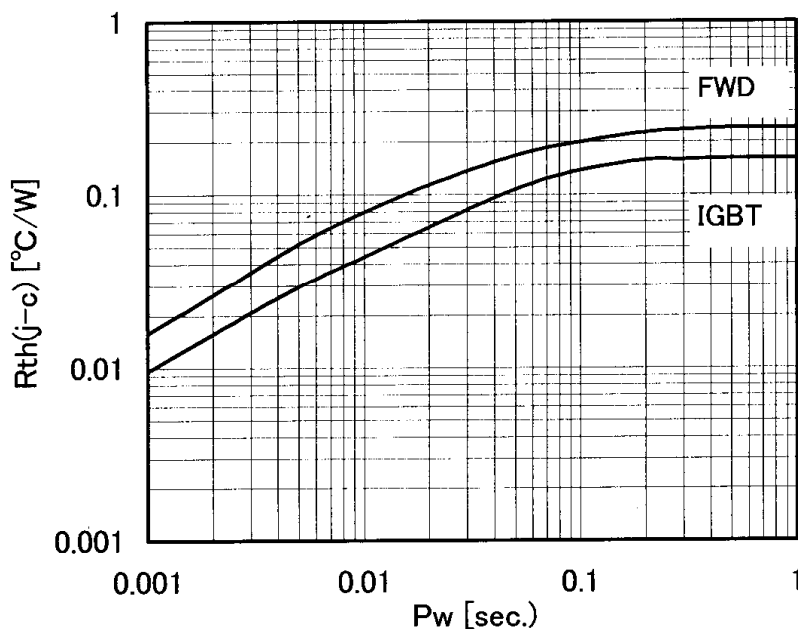

REVISIONS					

	DATE	NAME	APPROVED	Fuji Electric Co., Ltd.	
DRAWN	-	-		DWG. NO.	MT5F12221
CHECKED	-	-			
					4 / 4