

CS-2844/CS-3844
CS-2845/CS-3845

Current Mode PWM Control Circuit with 50% Max Duty Cycle

Description

The CS-3844/45 provides all the necessary features to implement off-line fixed frequency current-mode control with a minimum number of external components.

The CS-3844 family incorporates a new precision temperature-controlled oscillator to minimize variations in frequency. An internal toggle flip-flop, which blanks the output every other clock cycle, limits the duty-cycle range to less than 50%. An undervoltage lockout ensures that V_{REF} is stabilized


before the output stage is enabled. In the CS-2844/CS-3844 turn on occurs at 16V and turn off at 10V. In the CS-2845/CS-3845 turn on is at 8.4V and turn off at 7.6V.

Other features include low start-up current, pulse-by-pulse current limiting, and a high-current totem pole output for driving capacitive loads, such as gate of a power MOSFET. The output is low in the off state, consistent with N-channel devices.

Absolute Maximum Ratings

Supply Voltage ($I_{CC} < 30\text{mA}$)	Self Limiting
Supply Voltage (Low Impedance Source)	30V
Output Current	$\pm 1\text{A}$
Output Energy (Capacitive Load)	5 μJ
Analog Inputs (V_{FB} , V_{SENSE})	-0.3V to 5.5V
Error Amp Output Sink Current	10mA
Lead Temperature Soldering	
Wave Solder (through hole styles only)	10 sec. max, 260°C peak
Reflow (SMD styles only)	60 sec. max above 183°C, 230°C peak

Block Diagram

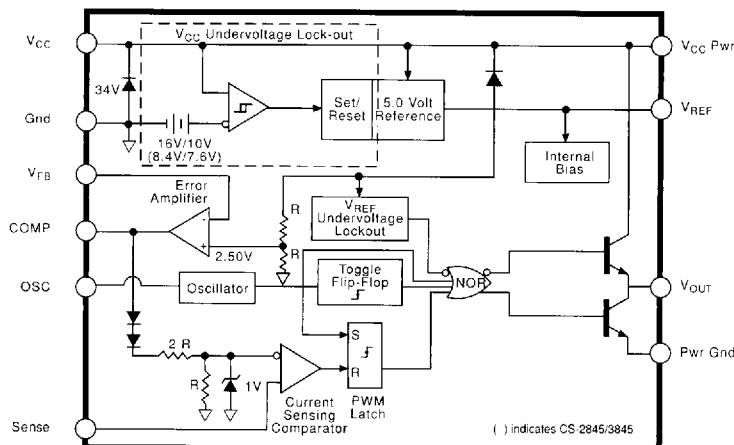


Features


- Optimized for Offline Control
- Temp. Compensated Oscillator
- 50% Max Duty-cycle Clamp
- V_{REF} Stabilized before Output Stage is Enabled
- Low Start-up Current
- Pulse-by-pulse Current Limiting
- Improved Undervoltage Lockout
- Double Pulse Suppression
- 1% Trimmed Bandgap Ref.
- High Current Totem Pole Output

Package Options


8 Lead PDIP & SO Narrow



14 Lead SO Narrow



16 Lead SO Wide



Cherry Semiconductor

2067556 0003216 151

Cherry Semiconductor Corporation
2000 South County Trail
East Greenwich, Rhode Island 02818-1530
Tel: (401)885-3600 Fax: (401)885-5786
email: info@cherry-semi.com

Electrical Characteristics: $-25^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ for CS-2844/2845, $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$ for CS-3844/3845. $V_{CC}=15\text{V}$ (Note 1); $R_T=10\text{k}\Omega$, $C_T=3.3\text{nF}$ for sawtooth mode, unless otherwise stated.

PARAMETER	TEST CONDITIONS	CS-2844/CS-2845			CS-3844/CS-3845			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
■ Reference Section								
Output Voltage	T _J =25°C, I _{REF} =1mA	4.95	5.00	5.05	4.90	5.00	5.10	V
Line Regulation	12≤V _{CC} ≤25V		6	20		6	20	mV
Load Regulation	1≤I _{REF} ≤20mA		6	25		6	25	mV
Temperature Stability	(Note 2)		0.2	0.4		0.2	0.4	mV/°C
Total Output Variation	Line, Load, Temp. (Note 2)	4.90		5.10	4.82		5.18	V
Output Noise Voltage	10Hz≤f≤10kHz, T _J =25°C (Note 2)		50			50		μV
Long Term Stability	T _A =125°C, 1000 Hrs. (Note 2)		5	25		5	25	mV
Output Short Circuit	T _A =25°C	-30	-100	-180	-30	-100	-180	mA
■ Oscillator Section								
Initial Accuracy	Sawtooth Mode, T _J =25°C	47	52	57	47	52	57	kHz
Voltage Stability	12≤V _{CC} ≤25V		0.2	1.0		0.2	1.0	%
Temperature Stability	Sawtooth Mode T _{MIN} ≤T _A ≤T _{MAX} (Note 2)		5			5		%
Amplitude	V _{OSC} (peak to peak)		1.7			1.7		V
■ Error Amp Section								
Input Voltage	V _{COMP} =2.5V	2.45	2.50	2.55	2.42	2.50	2.58	V
Input Bias Current	V _{FB} =0V		-0.3	-1.0		-0.3	-2.0	μA
A _{VOL}	2≤V _{OUT} ≤4V	65	90		65	90		dB
Unity Gain Bandwidth	(Note 2)	0.7	1.0		0.7	1.0		MHz
PSRR	12≤V _{CC} ≤25V	60	70		60	70		dB
Output Sink Current	V _{FB} =2.7V, V _{COMP} =1.1V	2	6		2	6		mA
Output Source Current	V _{FB} =2.3V, V _{COMP} =5V	-0.5	-0.8		-0.5	-0.8		mA
V _{OUT} HIGH	V _{FB} =2.3V, R _L =15kΩ to Gnd	5	6		5	6		V
V _{OUT} LOW	V _{FB} =2.7V, R _L =15kΩ to V _{REF}		0.7	1.1		0.7	1.1	V
■ Current Sense Section								
Gain	(Notes 3 & 4)	2.85	3.00	3.15	2.85	3.00	3.15	V/V
Maximum Input Signal	V _{COMP} =5V (Note 3)	0.9	1.0	1.1	0.9	1.0	1.1	V
PSRR	12≤V _{CC} ≤25V (Note 3)		70			70		dB
Input Bias Current	V _{Sense} =0V		-2	-10		-2	-10	μA
Delay to Output	T _J =25°C (Note 2)		150	300		150	300	ns
■ Output Section								
Output Low Level	I _{SINK} =20mA		0.1	0.4		0.1	0.4	V
	I _{SINK} =200mA		1.5	2.2		1.5	2.2	V
Output High Level	I _{SOURCE} =20mA	13.0	13.5		13.0	13.5		V
	I _{SOURCE} =200mA	12.0	13.5		12.0	13.5		V
Rise Time	T _J =25°C, C _L =1nF (Note 2)		50	150		50	150	ns
Fall Time	T _J =25°C, C _L =1nF (Note 2)		50	150		50	150	ns

Electrical Characteristics: continued

PARAMETER	TEST CONDITIONS	CS-2844/CS-2845			CS-3844/CS-3845			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
■ Total Standby Current								
Start-Up Current			0.5	1.0		0.5	1.0	mA
Operating Supply Current	$V_{FB}=V_{Sense}=0V$ $R_T=10k\Omega$, $C_T=3.3nF$		11	17		11	17	mA
V_{CC} Zener Voltage	$I_{CC}=25mA$		34			34		V

■ PWM Section

Maximum Duty Cycle		46	48	50	46	48	50	%
Minimum Duty Cycle				0			0	%

PARAMETER	TEST CONDITIONS	CS-2844			CS-3844			CS-2845/CS-3845			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	

■ Under-Voltage Lockout Section

Start Threshold		15	16	17	14.5	16	17.5	7.8	8.4	9.0	V
Min. Operating Voltage	After Turn On	9	10	11	8.5	10	11.5	7.0	7.6	8.2	V

Notes: 1. Adjust V_{CC} above the start threshold before setting at 15V.

2. These parameters, although guaranteed, are not 100% tested in production.


3. Parameter measured at trip point of latch with $V_{FB}=0$.

4. Gain defined as:

$$A = \frac{\Delta V_{COMP}}{\Delta V_{Sense}} ; 0 \leq V_{Sense} \leq 0.8V.$$

Package Pin Description

PACKAGE PIN #			PIN SYMBOL	FUNCTION
8L PDIP/SO	14L SO Narrow	16L SO Wide		
1	1	3	COMP	Error amp output, used to compensate error amplifier.
2	3	4	V_{FB}	Error amp inverting input.
3	5	5	Sense	Noninverting input to Current Sense Comparator.
4	7	6	OSC	Oscillator timing network with Capacitor to Ground, resistor to V_{REF} .
5	9	11	Gnd	Ground.
	8	10	Pwr Gnd	Output driver Ground.
6	10	12	V_{OUT}	Output drive pin.
	11	13	V_{CCPwr}	Output driver positive supply.
7	12	14	V_{CC}	Positive power supply.
8	14	15	V_{REF}	Output of 5V internal reference.
	2,4,6,13	1,2,7,8,9,16	NC	No Connection.

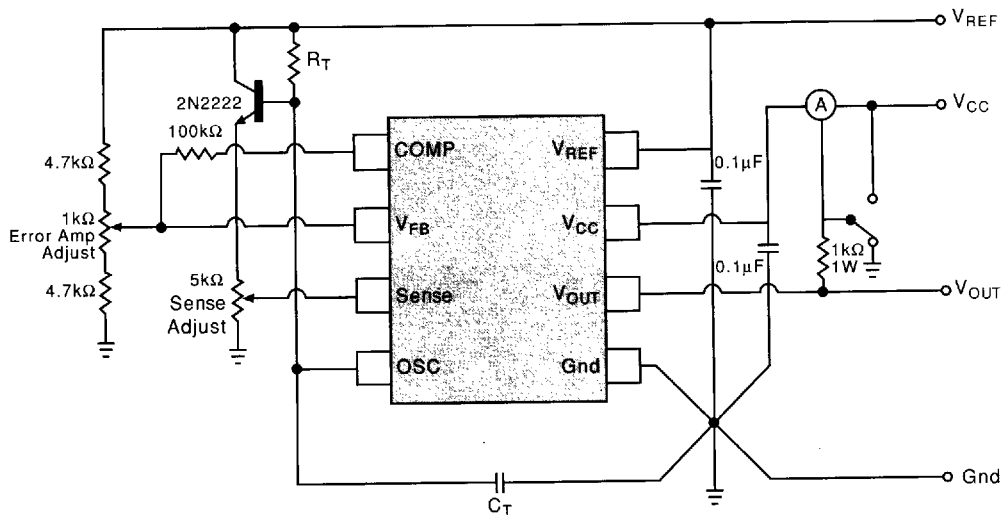

Circuit Description

Undervoltage Lockout

During Undervoltage Lockout (Figure 1), the output driver is biased to sink minor amounts of current. The output should be shunted to ground with a resistor to prevent activating the power switch with extraneous leakage currents.

PWM Waveform

To generate the PWM waveform, the control voltage from the error amplifier is compared to a current sense signal which represents the peak output inductor current (Figure 2). An increase in V_{CC} causes the inductor current slope to increase, thus reducing the duty cycle. This is an inherent feed-forward characteristic of current mode control, since the control voltage does not have to change during changes of input supply voltage.

When the power supply sees a sudden large output current increase, the control voltage will increase allowing the duty cycle to momentarily increase. Since the duty cycle tends to exceed the maximum allowed to prevent transformer saturation in some power supplies, the internal oscillator waveform provides the maximum duty cycle clamp as programmed by the selection of OSC components.

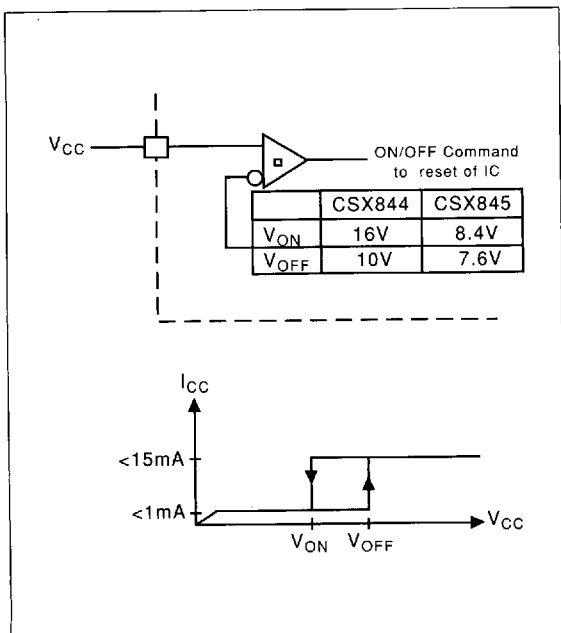


Figure 1: Startup voltage for CS-X844 and CS-X845.

2067556 0003219 960

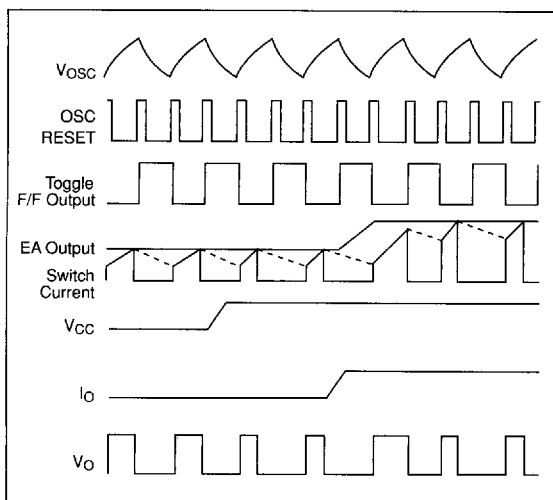


Figure 2: Timing Diagram

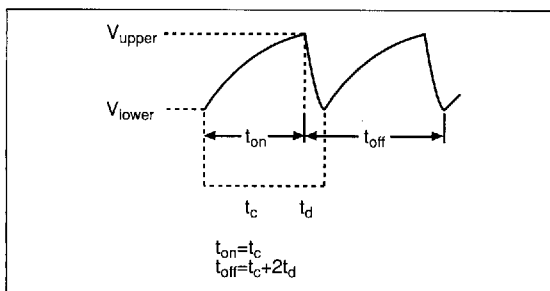


Figure 3: Duty Cycle parameters.

Setting the Oscillator

The times T_c and T_d can be determined as follows:

$$t_c = R_T C_T \ln \left(\frac{V_{REF} - V_{lower}}{V_{REF} - V_{upper}} \right)$$

$$t_d = R_T C_T \ln \left(\frac{V_{REF} - I_d R_T - V_{lower}}{V_{REF} - I_d R_T - V_{upper}} \right)$$

Substituting in typical values for the parameters in the above formulas:

$V_{REF} = 5.0V$, $V_{upper} = 2.7V$, $V_{lower} = 1.0V$, $I_d = 8.3A$, then

$$t_c \approx 0.5534 R_T C_T$$

$$t_d = R_T C_T \ln \left(\frac{2.3 - 0.0083 R_T}{4.0 - 0.0083 R_T} \right)$$

For better accuracy R_T should be $\geq 10k\Omega$.

Grounding

High peak currents associated with capacitive loads necessitate careful grounding techniques. Timing and bypass capacitors should be connected close to Gnd in a single point ground.

The transistor and $5k\Omega$ potentiometer are used to sample the oscillator waveform and apply an adjustable ramp to Sense.

Package Specification


PACKAGE DIMENSIONS IN mm (INCHES)

Lead Count	D			
	Metric		English	
	Max	Min	Max	Min
8 Lead PDIP	9.40	9.14	.370	.360
8 Lead SO Narrow	5.00	4.80	.197	.188
14L SO Narrow	8.74	8.53	.344	.336
16L SO Wide	10.46	10.21	.412	.402


PACKAGE THERMAL DATA

Thermal Data		8 L PDIP	8L SO Narrow	14 L SO Narrow	16L SO Wide	
R _{θJC}	typ	52	45	30	23	°C/W
R _{θJA}	typ	100	165	125	105	°C/W


8L PDIP

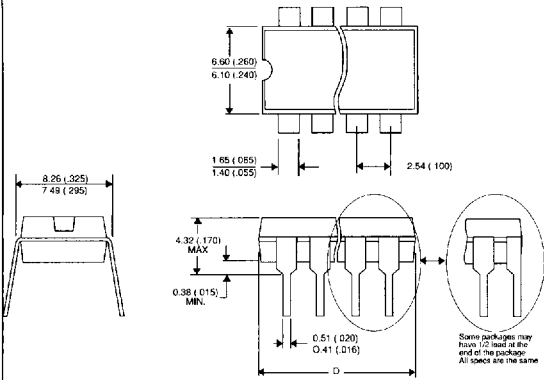

8 & 14L SO Narrow

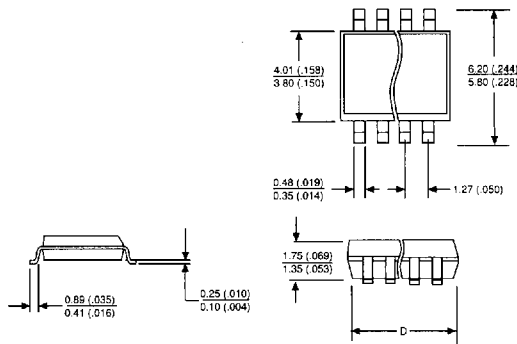

16L SO Wide

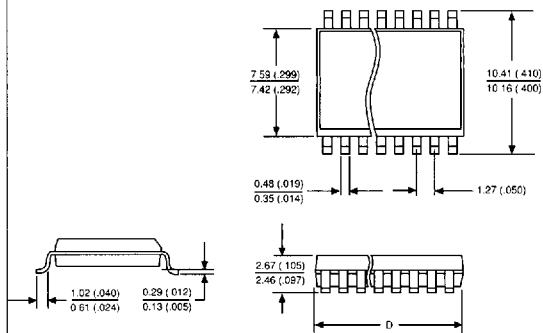

Ordering Information

Part Number	0°C to 70°C	-25°C to 85°C	Description
CS-3844N8	•		8L PDIP
CS-3844D8	•		8L SO
CS-3844D14	•		14L SO
CS-3844DW16	•		16L SO Wide
CS-2844N8		•	8L PDIP
CS-3845N8	•		8L PDIP
CS-3845D8	•		8L SO
CS-3845D14	•		14L SO
CS-3845DW16	•		16L SO Wide
CS-2845N8		•	8L PDIP
CS-2844DW16		•	16L SO Wide
CS-2844D14		•	14L SO
CS-2845DW16		•	16L SO Wide

2067556 0003221 519