

SONY**CXB1110Q/Q-Y**

T-68-11-51

16-Line to 1-Line Data Selector/Multiplexer**Description**

The CXB1110Q is an ultra high speed monolithic ECL 16-Line to 1-Line Data Selector/Multiplexer.



The IC select 1 out of 16 inputs for the output. The data present at inputs (In) is selected and sent to the output (Z) in accordance with four bit Select inputs (Sn).

Features

- Typical AC characteristics: $T_{pd}=620ps$ (In)
- Internal pull down resistors on input pins to maintain logic LOW level with the pins left open
- ECL 100K compatible I/O levels

Pin Names

In	Data inputs
Z	Data output
Sn	Select inputs
Vcc	Circuit ground
VCCA	Circuit ground for output
VEE	Negative power supply

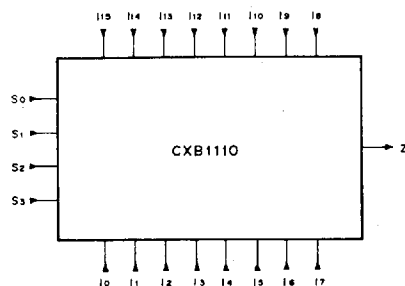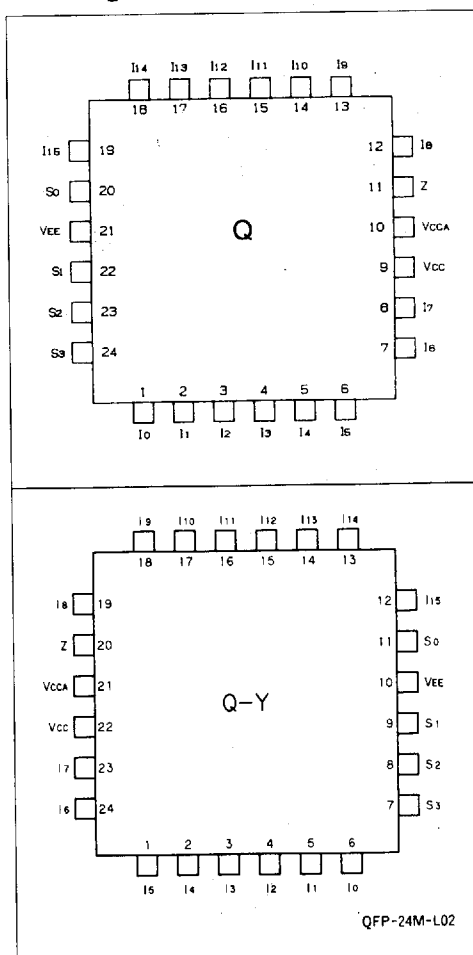Logic Symbol**Pin Assignment**

SONY®

CXB1110Q/QY

Truth Table

T-68-11-51

Select Inputs				Output
S ₀	S ₁	S ₂	S ₃	Z
L	L	L	L	I ₀
H	L	L	L	I ₁
L	H	L	L	I ₂
H	H	L	L	I ₃
L	L	H	L	I ₄
H	L	H	L	I ₅
L	H	H	L	I ₆
H	H	H	L	I ₇
L	L	L	H	I ₈
H	L	L	H	I ₉
L	H	L	H	I ₁₀
H	H	L	H	I ₁₁
L	L	H	H	I ₁₂
H	L	H	H	I ₁₃
L	H	H	H	I ₁₄
H	H	H	H	I ₁₅

Note: H; HIGH voltage level

L; LOW voltage level

SONY

CXB1110Q/QY

T-68-11-51

DC Characteristics

 $V_{EE} = -4.5 \pm 0.3V$, $V_{CC} = V_{CCA} = GND$, $V_{TT} = -2.0V$, $T_C = 0^\circ C$ to $+85^\circ C$

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Power supply current	I_{EE}		-204	-150	-105	mA

Note: Other DC characteristics; See pages 3-3 and 3-4.


AC Characteristics

 $V_{EE} = -4.5 \pm 0.3V$, $V_{CC} = V_{CCA} = GND$, $V_{TT} = -2.0V$, $T_C = 0^\circ C$ to $+85^\circ C$, $R_T = 50\Omega$ to V_{TT}

Item	Symbol	Input	Output	Test Condition	Min.	Typ.	Max.	Unit
Propagation delay time	T _{PLH}	In	Zn		460	610	770	ps
	T _{PHL}				470	620	780	
	T _{PLH}	Sn			680	830	990	
	T _{PHL}				1010	1170	1330	
Rise time	T _{TLH}	In,Sn		20% to 80%		270	340	
Fall time	T _{THL}					180	230	

Note: AC test circuit; See page 4-3.

Logic Diagram

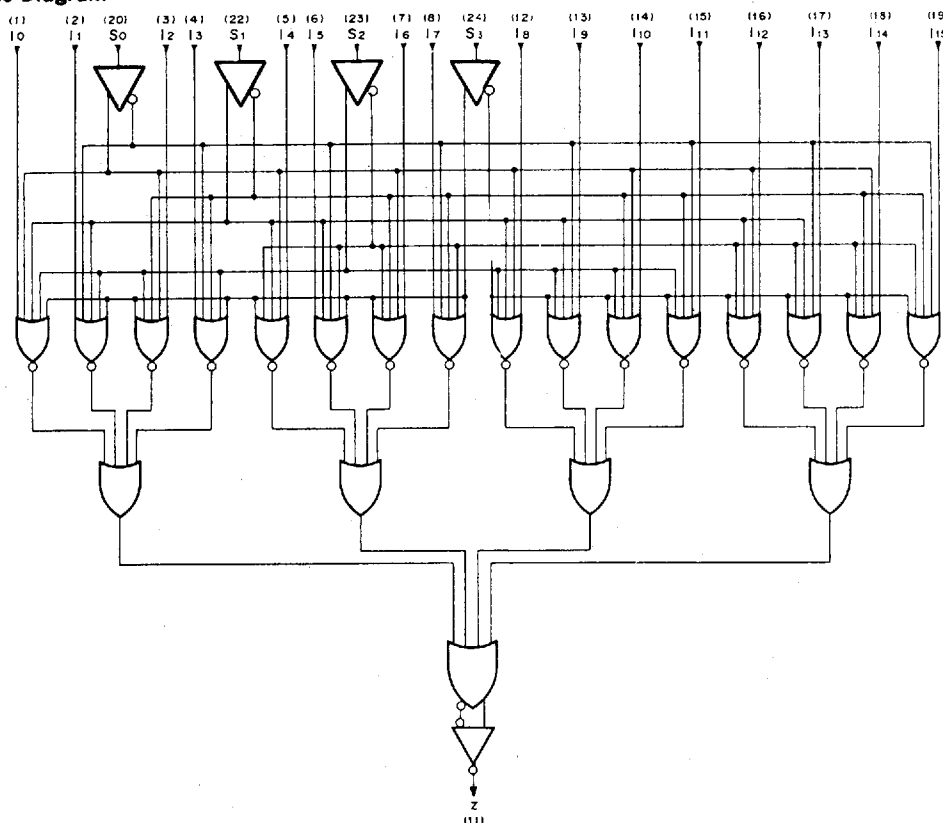

Package Data


T-90-20

Package Outline

Unit: mm


24pin QFP (QFP-24M-S01)

24pin QFP (Metal) 0.3g

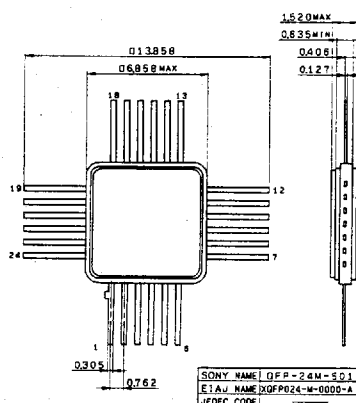


32pin QFP (QFP-32M-S01)

32pin QFP (Metal) 0.2g

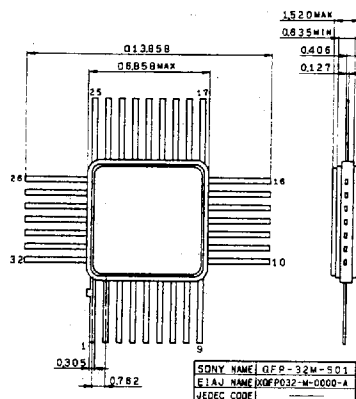

24pin QFP (QFP-24M-L02)


24pin QFP (Metal) 0.3g

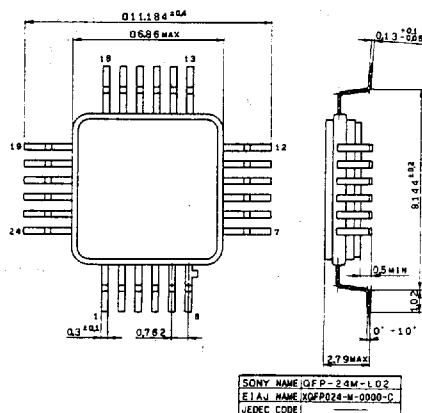

T-90-20

32pin QFP (QFP-32M-L02)


32pin QFP (Metal) 0.2g

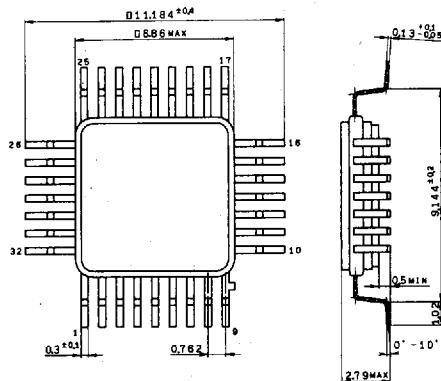

SONY NAME	QFP-32M-L02
EIAJ NAME	XQFP032-M-0000-C
JEDEC CODE	


32pin QFP (QFP-32C-L01)

32pin QFP (Ceramic)

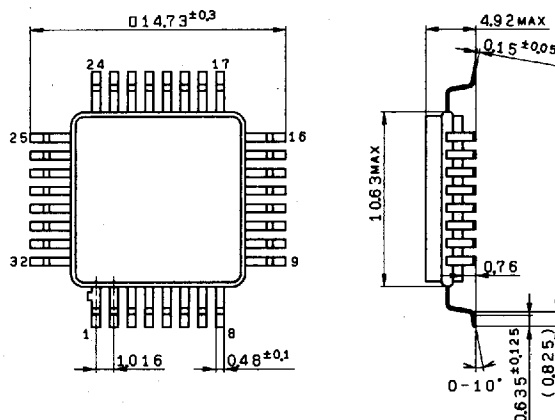

SONY NAME	QFP-32C-L01
EIAJ NAME	XQFP032-G-0000-A
JEDEC CODE	

16pin QFP

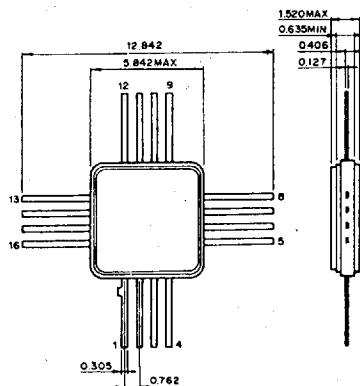

Package Data

Package Data	Page
1. 16 pin QFP	6-3
2. 24 pin QFP	6-3
3. 32 pin QFP	6-3
4. 24 pin QFP with formed lead	6-4
5. 32 pin QFP with formed lead	6-4

Package Data


T-90-20

Package Outline

Unit: mm


24pin QFP (QFP-24M-S01)

24pin QFP (Metal) 0.3g

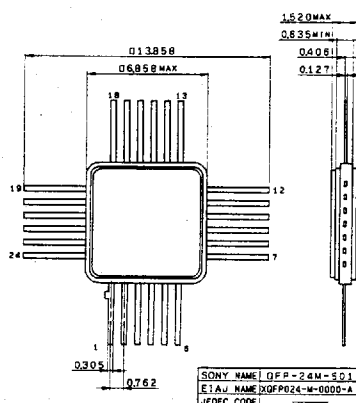


32pin QFP (QFP-32M-S01)

32pin QFP (Metal) 0.2g

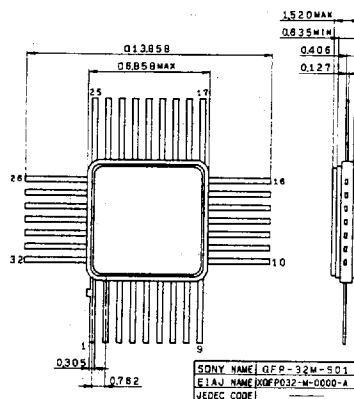

24pin QFP (QFP-24M-L02)


24pin QFP (Metal) 0.3g

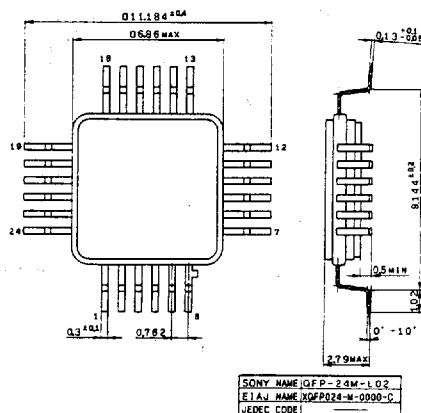

T-90-20

32pin QFP (QFP-32M-L02)


32pin QFP (Metal) 0.2g

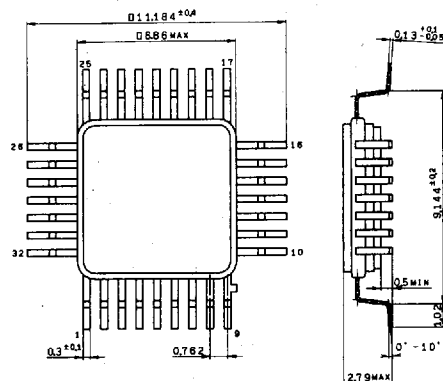

SONY NAME	QFP-32M-L02
EIAJ NAME	XQFP032-M-0000-C
JEDEC CODE	

32pin QFP (QFP-32C-L01)

32pin QFP (Ceramic)

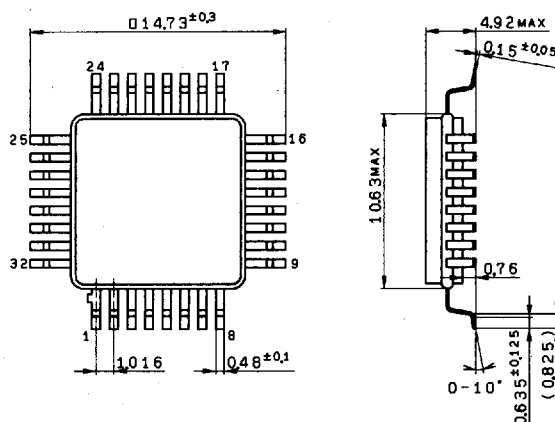

SONY NAME	QFP-32C-L01
EIAJ NAME	XQFP032-G-0000-A
JEDEC CODE	

16pin QFP

