

SONY

CXK581000P/M

-10L/12L/15L
-10LL/12LL/15LL


131072-word × 8-bit High Speed CMOS Static RAM

Description

CXK581000P/M is a general purpose high speed CMOS static RAM organized as 131, 072 words by 8 bits. Operating on a single 5V supply, this asynchronous IC is suitable for high speed and low power consumption applications where battery back up for nonvolatility is required.

Features

- Fast access time : (Access time)
CXK581000P/M-10L/10LL 100ns (Max.)
CXK581000P/M-12L/12LL 120ns (Max.)
CXK581000P/M-15L/15LL 150ns (Max.)
- Low power consumption operation :
Standby /DC operation
CXK581000P/M-10L, 12L, 15L ; 10 μ W (Typ.) /35mW (Typ.)
10LL, 12LL, 15LL ; 3.5 μ W (Typ.) /35mW (Typ.)
- Single +5V supply : +5V $\pm$ 10%
- Fully static memory ... No clock or timing strobe required.
- Equal access and cycle time.
- Common data input and output:three state output.
- Directly TTL compatible : All inputs and outputs.
- Low voltage data retention : 2.0V (Min.)
- CXK581000P 600mil 32 pin DIP package
CXK581000M 525mil 32 pin SOP package

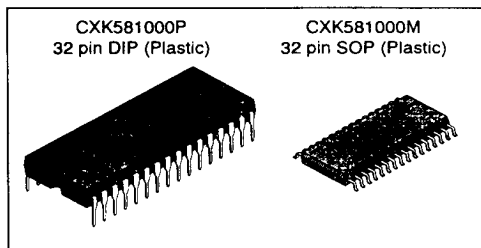


Functions

131,072 word × 8 bit static RAM


Structure

Silicon gate CMOS IC

Block Diagram

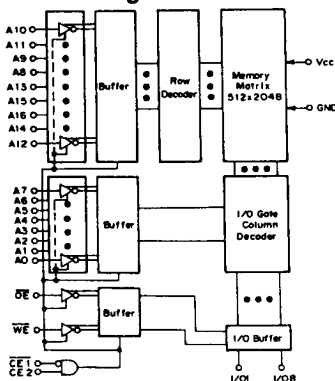

Pin Configuration (Top View)

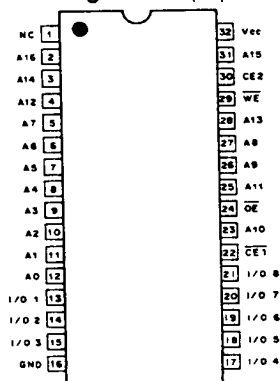

Pin Description

Symbol	Description
A0 to A16	Address input
I/O1 to I/O8	Data input output
CE1, CE2	Chip enable 1, 2 input
WE	Write enable input
OE	Output enable input
Vcc	Power supply
GND	Ground
NC	No connection

E89322C06 - ST

Absolute Maximum Ratings

(Ta=25°C, GND=0V)

Item	Symbol	Rating	Unit
Supply voltage	V _{CC}	− 0.5 to +7.0	V
Input voltage	V _{IH}	− 0.5 * to V _{CC} +0.5	V
Input and output voltage	V _{I/O}	− 0.5 * to V _{CC} +0.5	V
Allowable power dissipation	P _D	CXK581000P	1.0
		CXK581000M	0.7
Operating temperature	T _{opr}	0 to +70	°C
Storage temperature	T _{stg}	− 55 to +150	°C
Soldering temperature	T _{solder}	260±10	°C • sec

* V_{IH}, V_{I/O} = − 3.0V Min. for pulse width less than 50ns.**Truth Table**

CE1	CE2	OE	WE	Mode	I/O pin	V _{CC} current
H	X	X	X	Not selected	High Z	I _{SB1} , I _{SB2}
X	L	X	X	Not selected	High Z	I _{SB1} , I _{SB2}
L	H	H	H	Output disable	High Z	I _{CC1} , I _{CC2} , I _{CC3}
L	H	L	H	Read	Data out	I _{CC1} , I _{CC2} , I _{CC3}
L	H	X	L	Write	Data in	I _{CC1} , I _{CC2} , I _{CC3}

X : "H" or "L"

DC Recommended Operating Conditions (Ta=0 to +70°C, GND=0V)

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	V _{CC}	4.5	5.0	5.5	V
Input high voltage	V _{IH}	2.2	—	V _{CC} +0.3	V
Input low voltage	V _{IL}	− 0.3 *	—	0.8	V

* V_{IL} = − 3.0V Min. for pulse width less than 50ns.

Electrical Characteristics

• DC characteristics

(V_{CC}=5V ± 10%, GND=0V, T_a=0 to +70 °C)

Item	Symbol	Test conditions		- 10L/12L/15L			- 10LL/12LL/15LL			Unit
				Min.	Typ. *	Max.	Min.	Typ. *	Max.	
Input leakage current	I _{LI}	V _{IN} =GND to V _{CC}		- 1	—	1	- 1	—	1	μA
Output leakage current	I _{LO}	CE1=V _{IH} or CE2=V _{IL} or OE=V _{IH} or WE=V _{IL} V _{IO} =GND to V _{CC}		- 1	—	1	- 1	—	1	μA
Operating power supply current	I _{CC1}	CE1=V _{IL} , CE2=V _{IH} V _{IN} =V _{IH} or V _{IL} I _{OUT} =0mA		—	7	15	—	7	15	mA
Average operating current	I _{CC2}	Min. cycle Duty=100% I _{OUT} =0mA	Write cycle	—	35	60	—	35	60	mA
			Read cycle	—	25	40	—	25	40	
	I _{CC3}	Cycle time 1 μs Duty=100% I _{OUT} =0mA CE1 ≤ 0.2V, CE2 ≥ V _{CC} - 0.2V V _{IL} ≤ 0.2V, V _{IH} ≥ V _{CC} - 0.2V	Write cycle	—	10	20	—	10	20	mA
			Read cycle	—	5	10	—	5	10	
Standby current	I _{SB1}	CE2 ≤ 0.2V or CE1 ≥ V _{CC} - 0.2V CE2 ≥ V _{CC} - 0.2V	0 to 70 °C	—	—	100	—	—	20	μA
			0 to 40 °C	—	—	20	—	—	4	
			+25 °C	—	2	8	—	0.7	2	
	I _{SB2}	CE1=V _{IH} or CE2=V _{IL}		—	0.6	3	—	0.6	3	mA
Output high voltage	V _{OH}	I _{OH} = - 1.0mA		2.4	—	—	2.4	—	—	V
Output low voltage	V _{OL}	I _{OL} =2.1mA		—	—	0.4	—	—	0.4	V

* V_{CC}=5V, T_a=25 °C

I/O capacitance

(T_a=25 °C, f=1MHz)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Input capacitance	C _{IN}	V _{IN} =0V	—	—	6	pF
I/O capacitance	C _{I/O}	V _{IO} =0V	—	—	8	pF

Note) This parameter is sampled and is not 100% tested.


AC characteristics

• AC test conditions (Vcc=5V ± 10%, Ta=0 to +70 °C)

Item	Conditions
Input pulse high level	V _{IH} =2.2V
Input pulse low level	V _{IL} =0.8V
Input rise time	t _r =5ns
Input fall time	t _f =5ns
Input and output reference level	1.5V
Output load conditions	C _L * =100pF, 1TTL

* C_L includes scope and jig capacitances.

• Test circuit



• Read cycle ($\overline{WE}$ ="H")

Item	Symbol	– 10L/10LL		– 12L/12LL		– 15L/15LL		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
Read cycle time	t_{RC}	100	—	120	—	150	—	ns
Address access time	t_{AA}	—	100	—	120	—	150	ns
Chip enable access time ($\overline{CE1}$)	t_{CO1}	—	100	—	120	—	150	ns
Chip enable access time ($\overline{CE2}$)	t_{CO2}	—	100	—	120	—	150	ns
Output enable to output valid	t_{OE}	—	50	—	60	—	70	ns
Output hold from address change	t_{OH}	15	—	15	—	15	—	ns
Chip enable to output in low Z ($\overline{CE1}$, $\overline{CE2}$)	t_{LZ1} , t_{LZ2}	10	—	10	—	10	—	ns
Output enable to output in low Z ($\overline{OE}$)	t_{OLZ}	5	—	5	—	5	—	ns
Chip disable to output in high Z ($\overline{CE1}$, $\overline{CE2}$)	t_{HZ1} *, t_{HZ2} *	—	35	—	40	—	50	ns
Output disable to output in high Z ($\overline{OE}$)	t_{OHZ} *	—	35	—	40	—	50	ns

* t_{HZ1} , t_{HZ2} and t_{OHZ} are defined as the time required for outputs to turn to high impedance state and are not referred to as output voltage levels.


• Write cycle

Item	Symbol	– 10L/10LL		– 12L/12LL		– 15L/15LL		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
Write cycle time	t_{WC}	100	—	120	—	150	—	ns
Address valid to end of write	t_{AW}	70	—	85	—	100	—	ns
Chip enable to end of write	t_{CW}	70	—	85	—	100	—	ns
Data to write time overlap	t_{DW}	40	—	50	—	60	—	ns
Data hold from write time	t_{DH}	0	—	0	—	0	—	ns
Write pulse width	t_{WP}	70	—	80	—	90	—	ns
Address setup time	t_{AS}	0	—	0	—	0	—	ns
Write recovery time ($\overline{WE}$)	t_{WR}	0	—	0	—	0	—	ns
Write recovery time ($\overline{CE1}$, $\overline{CE2}$)	t_{WR1}	0	—	0	—	0	—	ns
Output active from end of write	t_{OW}	10	—	10	—	10	—	ns
Write to output in high Z	t_{WHZ} *	—	30	—	30	—	30	ns


* t_{WHZ} is defined as the time required for outputs to turn to high impedance state and is not referred to as output voltage level.

Timing Waveform


- Read cycle (1) : $\overline{CE1}=\overline{OE}=V_{IL}$, $CE2=V_{IH}$, $\overline{WE}=V_{IH}$

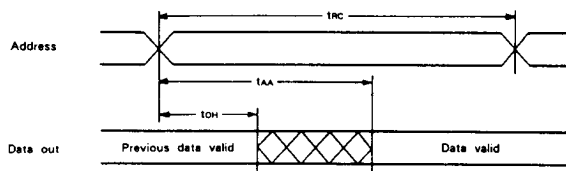


- Read cycle (2) : $\overline{WE}=V_{IH}$

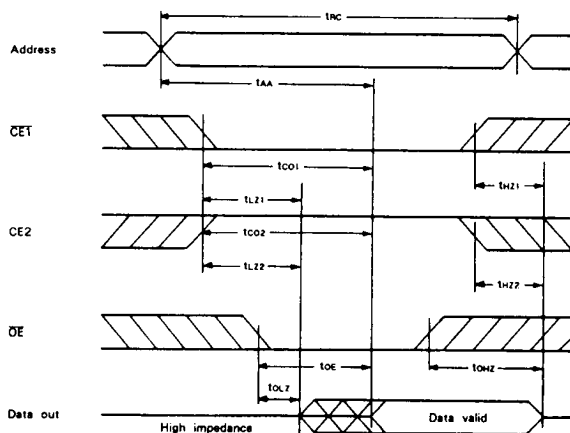


- Write cycle (1) : $\overline{WE}$ control

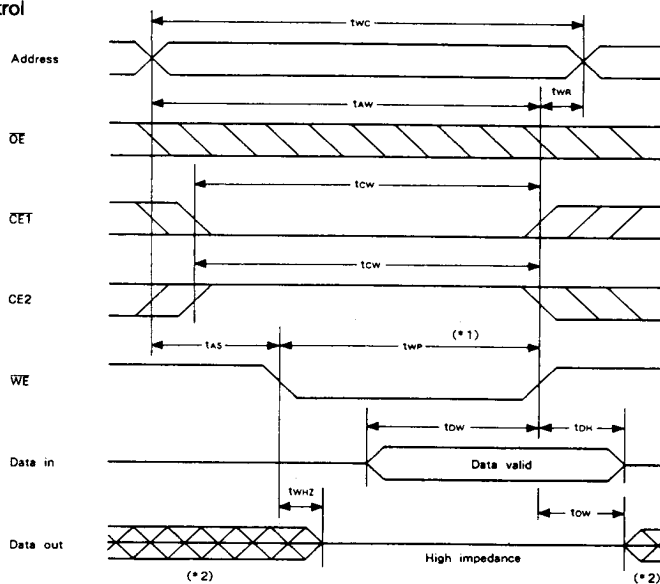

• Write cycle (2) : $\overline{CE1}$ control

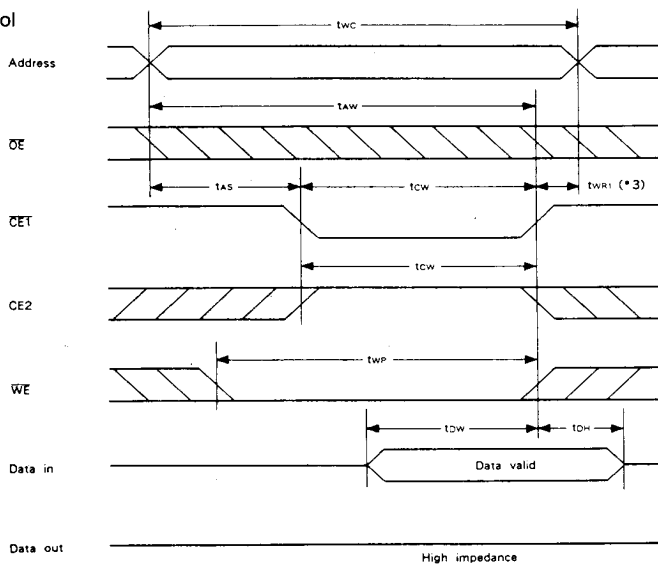

• Write cycle (3) : CE2 control

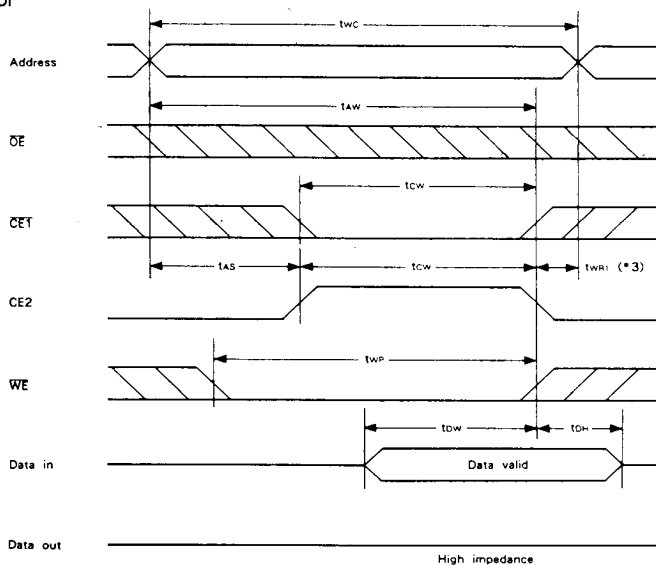

Note)

- * 1. Write is executed when both $\overline{CE1}$ and $\overline{WE}$ are at low and CE2 is at high simultaneously.
- * 2. Do not apply the data input voltage of the opposite phase to the output while I/O pin is in output condition.
- * 3. t_{WR1} is tested from either the rising edge of CE1 or the falling edge of CE2, whichever comes earlier, until the end of the write cycle.

Data Retention Characteristics

(Ta=0 to 70 °C)


Item	Symbol	Test conditions		- 10L/12L/15L			- 10LL/12LL/15LL			Unit
				Min.	Typ.	Max.	Min.	Typ.	Max.	
Data retention voltage	V _{DR}	* 1		2.0	—	5.5	2.0	—	5.5	V
Data retention current	I _{CCDR1}	V _{CC} =3.0V * 1	0 to 70 °C	—	—	50	—	—	12	μA
			0 to 40 °C	—	—	10	—	—	2.4	
			+25 °C	—	1	4	—	0.4	1.2	
	I _{CCDR2}	V _{CC} =2.0 to 5.5V * 1		—	2	100	—	0.7	20	mA
Data retention setup time	t _{CDRS}	Chip disable to data retention mode		0	—	—	0	—	—	ns
Recovery time	t _R			t _{RC} * 2	—	—	t _{RC} * 2	—	—	ns

Note)


* 1. $\overline{CE1} \geq V_{CC} - 0.2V$, $CE2 \geq V_{CC} - 0.2V$ ($\overline{CE1}$ control) or $CE2 \leq 0.2V$ ($CE2$ control)* 2. t_{RC} : Read cycle time

Data retention waveform

- Low supply voltage data retention waveform (1) ($\overline{CE1}$ control)

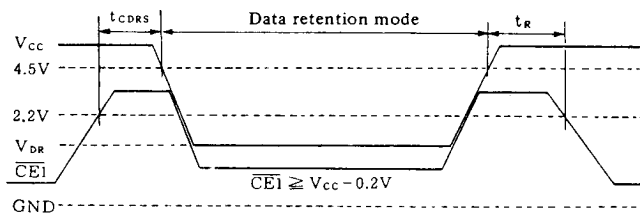


- Low supply voltage data retention waveform (2) ($CE2$ control)

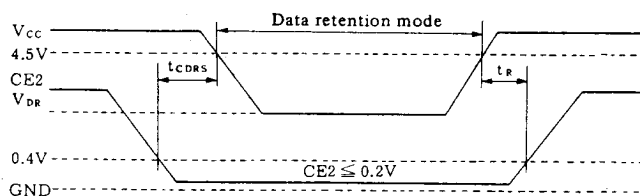


Example of Representative Characteristics


Supply current vs. Supply voltage

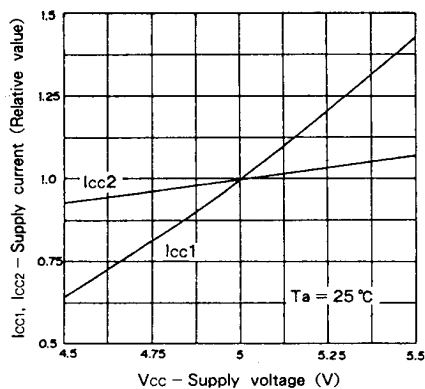


Supply current vs. Ambient temperature

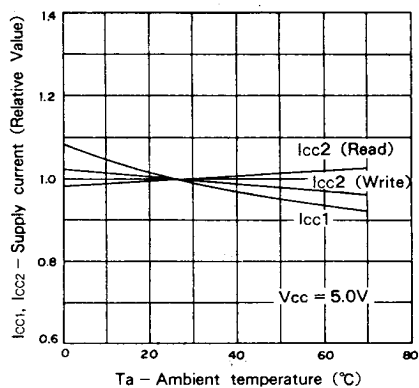


Supply current vs. Frequency

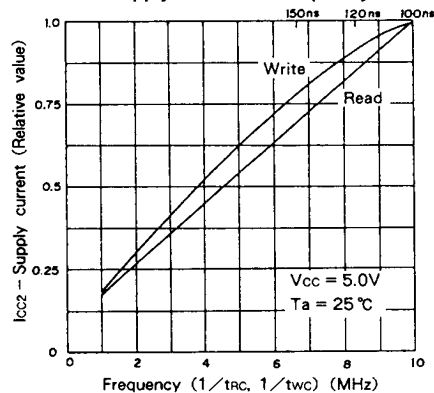


Access time vs. Load capacity

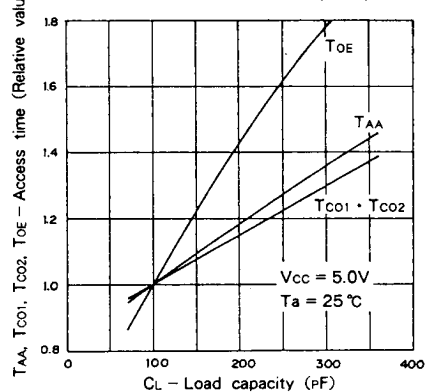


Access time vs. Supply voltage

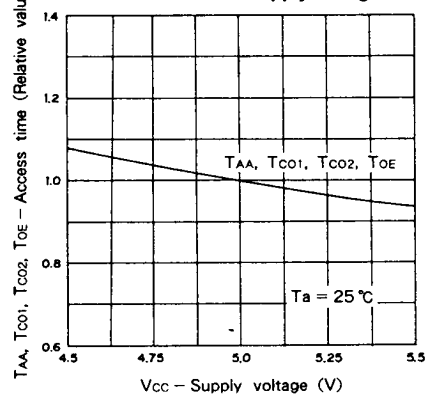


Access time vs. Ambient temperature

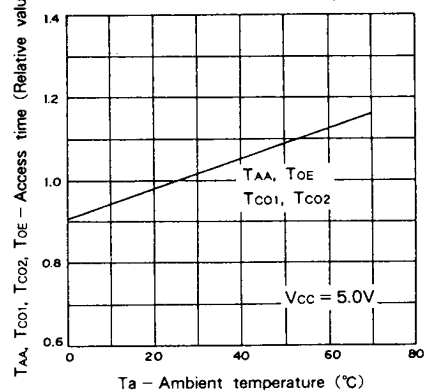


Standby current vs. Supply voltage

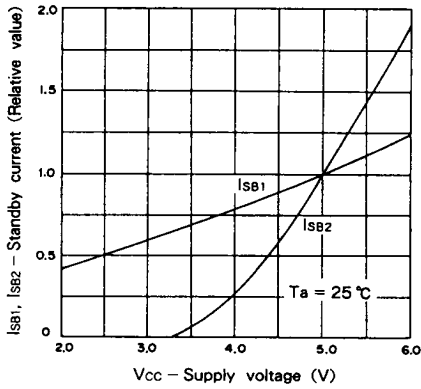


Standby current vs. Ambient temperature

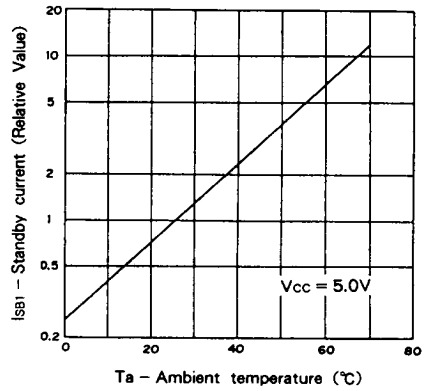


Input voltage level vs. Supply voltage

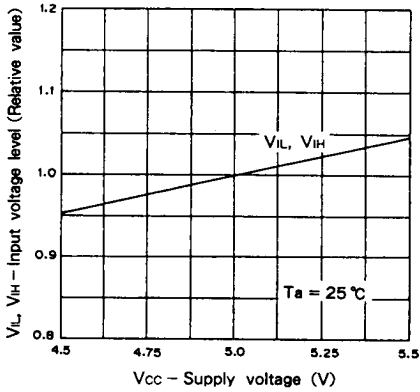


Standby current vs. Ambient temperature

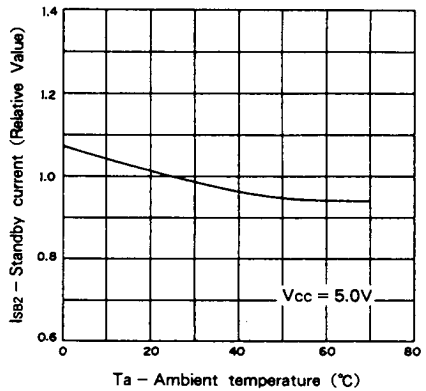

Output current vs. Output voltage

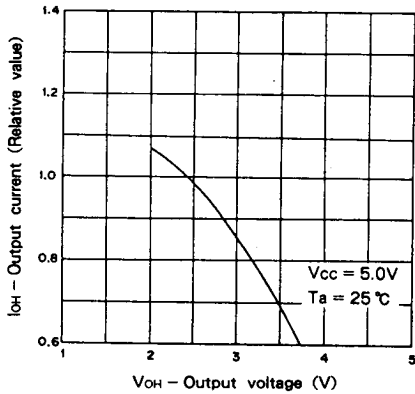


Output current vs. Output voltage

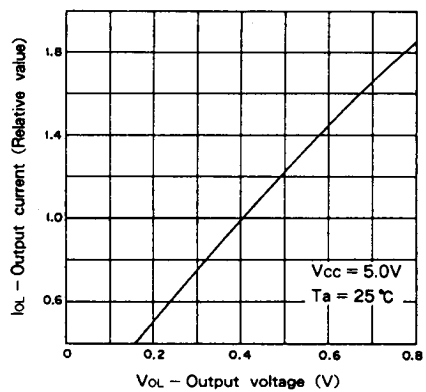


Package Outline Unit : mm

CXK581000P 32Pin DIP (Plastic) 600mil 4.5g

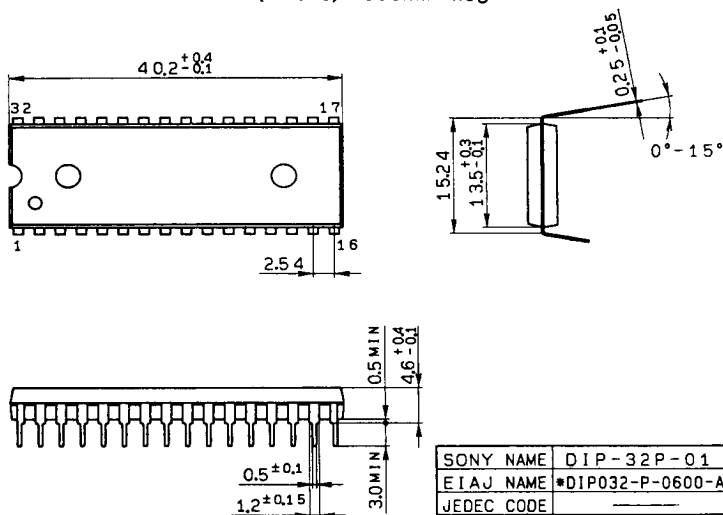

CXK581000M 32Pin SOP (Plastic) 525mil 1.2g

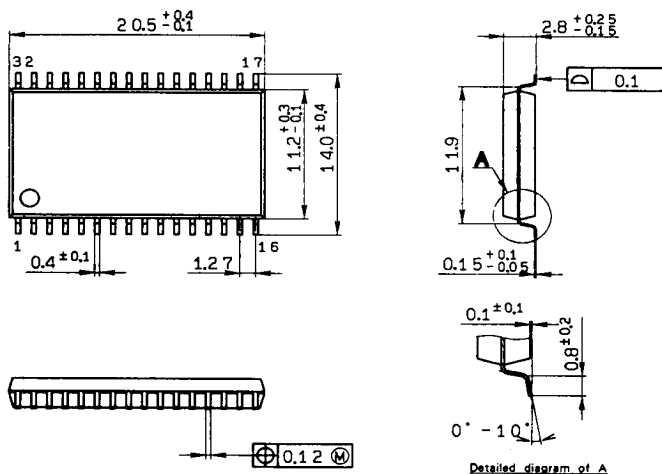

Detailed diagram of A