




RC-721

19" 2U High, Full-size Rackmount Chassis with 6-slot Backplane, 250W AT/ATX P/S
Provides PICMG1.3 Full-size Backplane

Industrial Chassis

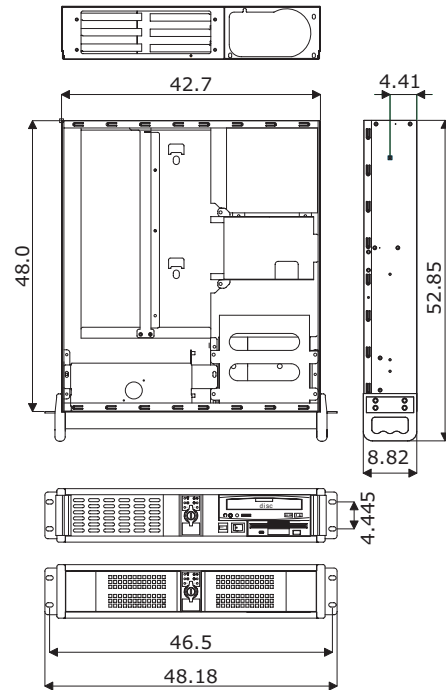

Features

- ◆ 19" 2U high, rackmount chassis compliant to EIA RS-310C standard
- ◆ Detachable card cage for easy installation and maintenance
- ◆ Provides 6-slot PICMG1.3 full-size or PICMG Bus backplane (PCI x 3, ISA x 3), 250W AT/ATX power supply
- ◆ External: 5.25" space x 1 + 3.5" space x 1
- ◆ Internal: 3.5" space x 1
- ◆ 8cm ball bearing cooling fan x 2
- ◆ Dual lockable latch doors
- ◆ FCC/CE industrial Class A approval

Specifications

Chassis

Meets EIA RS-310C 19" 2U high, rackmount standard; heavy-duty steel, SECC 1.2t (Japan)

Drive Space

External: 5.25" space x 1 + 3.5" space x 1
Internal: 3.5" space x 1

Front Panel

Power switch, reset button; power and HDD active LED

Thermal Solution

8cm ball bearing cooling x 2 fan and removable air filter

Altitude

15,000 feet

Power Supply

250W AT or ATX power supply

Temperature

0~+50°C (operating); 0~+70°C (storage)

Humidity

5~95%; non-condensing

Safety Standard

FCC/CE on chassis and FCC/CE/UL/TUV on power supply

Dimensions (L x W x H)

48.0 x 42.7 x 8.82 cm

Ordering Guide

- ◆ **RC-721B**
19" 2U High, Full-size Rackmount Chassis (notify AT or ATX)
- ◆ **RC-721B (blue door)**
19" 2U High, Full-size Rackmount Chassis w/PCIE-5SD B/P
- ◆ **RC-721B-6SD2(AT)**
RC-721B Chassis w/HPCI-6SD2 B/P
- ◆ **RC-721BA-6SD2(AT)**
RC-721B Chassis w/HPCI-6SD2 B/P, ZKS-250AE AT P/S