


ETD cores and accessories

ETD49

CORE SETS

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(l/A)$	core factor (C1)	0.534	mm^{-1}
V_e	effective volume	24000	mm^3
l_e	effective length	114	mm
A_e	effective area	211	mm^2
$A_{\min}$	minimum area	209	mm^2
m	mass of core half	≈62	g

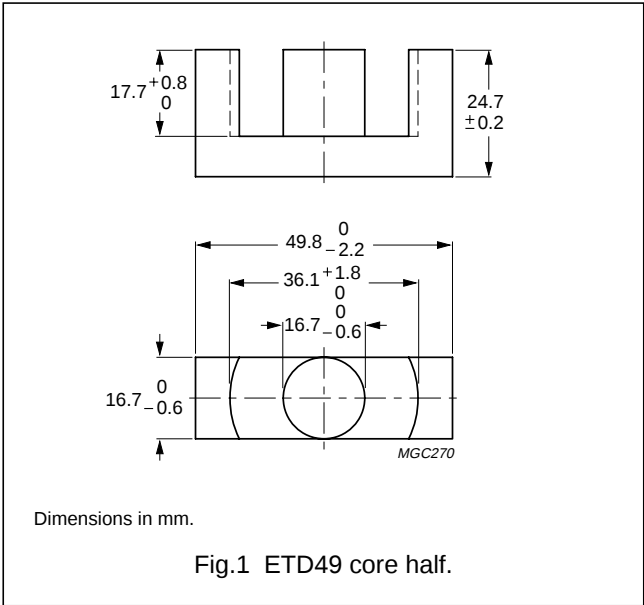

Core halves

Clamping force 50 ±20 N. Gapped cores are available on request.

GRADE	A_L (nH)	μ_e	AIR GAP (μm)	TYPE NUMBER
3C30 des	3400 ±25%	≈1550	≈0	ETD49-3C30
3C85	4200 ±25%	≈1950	≈0	ETD49-3C85
3C90 des	4200 ±25%	≈1950	≈0	ETD49-3C90
3F3 des	3900 ±25%	≈1800	≈0	ETD49-3F3

Properties of core sets under power conditions

GRADE	B (mT) at	CORE LOSS (W) at		
	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; $\hat{B}$ = 200 mT; T = 100 °C	f = 100 kHz; $\hat{B}$ = 100 mT; T = 100 °C	f = 400 kHz; $\hat{B}$ = 50 mT; T = 100 °C
3C30	≥360	≤2.7	≤3.1	—
3C85	≥320	≤3.4	≤4.0	—
3C90	≥330	≤2.7	≤3.1	—
3F3	≥320	—	≤3.0	≤5.4


ETD cores and accessories

ETD49

COIL FORMERS

General data 20-pins ETD49 coil former

PARAMETER	SPECIFICATION
Coil former material	polybutyleneterephthalate (PBT), glass-reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E45329(R)
Pin material	copper-tin alloy (CuSn), tin-lead alloy (SnPb) plated
Maximum operating temperature	155 °C, "IEC 85" class F
Resistance to soldering heat	"IEC 68-2-20", Part 2, Test Tb, method 1B, 350 °C, 3.5 s
Solderability	"IEC 68-2-20", Part 2, Test Ta, method 1

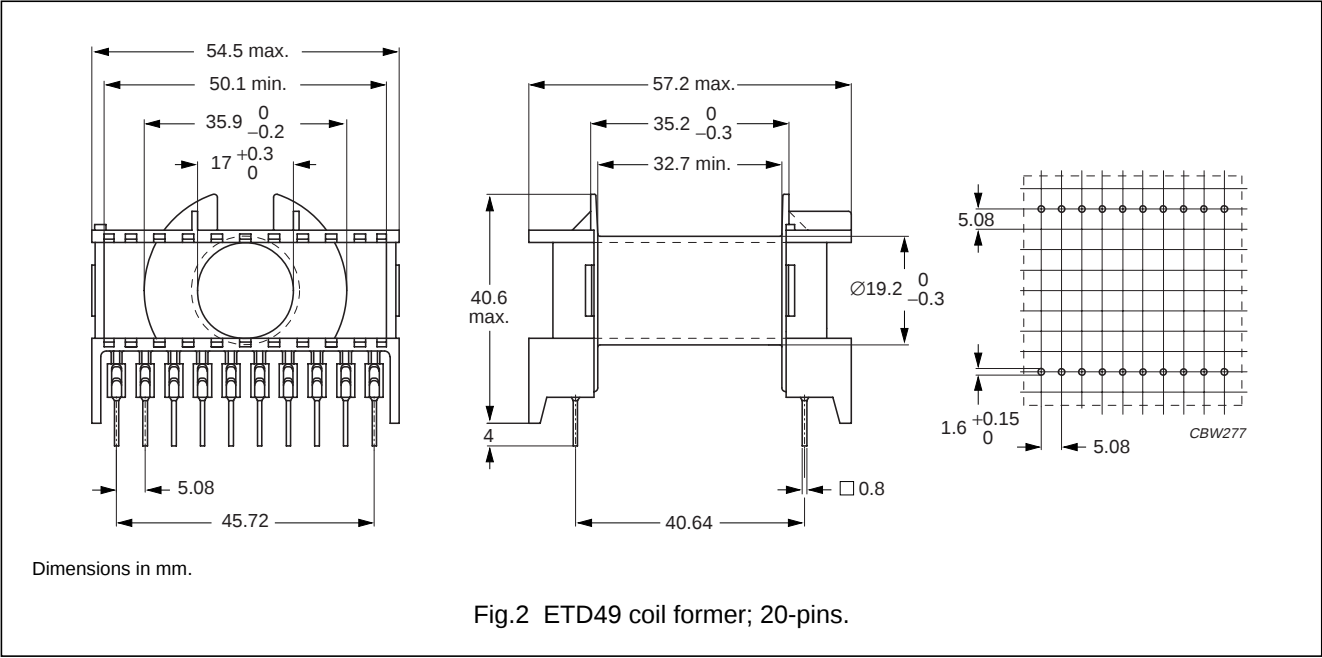

Winding data for 20-pins ETD49 coil former

NUMBER OF SECTIONS	WINDING AREA (mm ²)	MINIMUM WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	TYPE NUMBER
1	273	32.7	85	CPH-ETD49-1S-20P

ETD cores and accessories

ETD49

MOUNTING PARTS

General data

ITEM	REMARKS	FIGURE	TYPE NUMBER
Mounting clip	material: stainless steel	3	CLI-ETD49

