


371-9947

Traditional Series

Motor
Patented Brushless DC motor design.
Frame
Injection molded non-flammable black thermoplastic UL 94V-0 rating and aluminum
Bearing System :
Precision, life-lubricated ball bearing system
Precision, oil-impregnated sintered sleeve bearing system
Insulation
Class E integral ground system rated @100 Deg C
Insulation Resistance
More than 500M ohm between internal stator and lead wire(+)
measured by DC 500V
Dielectric Strength
600VAC for one minute
Safety Protection :Electronic locked rotor protected
Operating Temperature
-10 to +70 Deg.C
Storage Temperature
-40 to +70 Deg.C
Operating Voltage
Rated voltage $\pm 15\%$
Professional Design
We Can design to fit any special application requirement;@

**DC Brushless Fan
60x60x25mm**

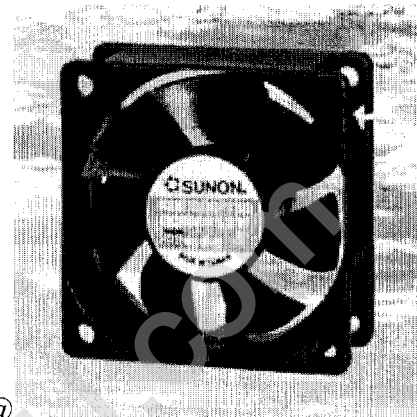

i@i@

i@

Model	P/N	Voltage VDC	Bearing Style	Current AMP	Input Watts	Speed RPM	AirFlow CFM	Pressure Inch-H ₂ O	Noise dBA	Weight (g)
KD1206PTS1	H	12	S	0.16	1.9	4300	22.5	0.20	33.5	59
KD1206PTS2	H	12	S	0.11	1.3	3700	18.5	0.15	29	59
KD1206PTS3	H	12	S	0.07	0.8	3100	16.0	0.10	25	59
KD1206PTB1	H	12	B	0.17	2.0	4300	22.5	0.20	34	59
KD1206PTB2	H	12	B	0.11	1.3	3700	18.0	0.15	30	59
KD1206PTB3	H	12	B	0.07	0.8	3100	16.0	0.10	26	59

B : Ball S : Sleeve Frame: PBT plastic

3719947

i@Products index / DC Fan (MS Series) / DC Fan (Traditional series)



E-mail : sunon@www.sunon.com.tw