


**SSL-LX100133XX SERIES      ULTRA BRIGHT RED LAMPS**

<b>FEATURES</b>		<b>APPLICATIONS</b>		<b>OPTIONS AVAILABLE</b>				
<ul style="list-style-type: none"> <li>• Ultra Bright Lamps</li> <li>• Down to 0.5mA Operation</li> <li>• Graded For Intensity</li> </ul>		<ul style="list-style-type: none"> <li>• Illumination Sources</li> <li>• Signs/Boards</li> <li>• Emergency Lighting</li> <li>• Warning Systems</li> </ul>		<ul style="list-style-type: none"> <li>• Add-on Spacers</li> <li>• Added-on Leads</li> <li>• Panel Mount Clips</li> <li>• P.C. Mounting Holders</li> </ul>				
LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	V <sub>f</sub> @ 20mA	
	RED	PEAK(nm)		TYP.(mcd.)	#(mA)		TYP.	MAX
SSL-LX100133SRC B	RED	660	WATER CLEAR	2000	20	25	1.8	2.4
SSL-LX100133SRC C	RED	660	WATER CLEAR	5000	20	25	1.8	2.4
SSL-LX100133SRC D	RED	660	WATER CLEAR	7000	20	25	1.8	2.4
SSL-LX100133SRC E	RED	660	WATER CLEAR	10000	20	25	1.8	2.4


See pages 8-14 for Max. operating limits and operating curves

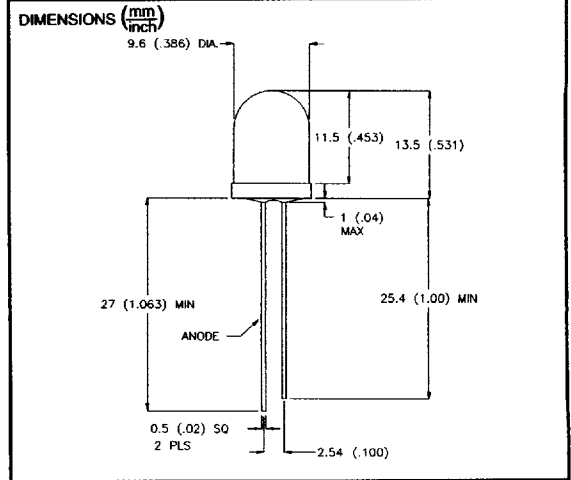

**PURE AMBER, PURE GREEN SERIES      SPECIAL COLOR(S)**

<b>FEATURES</b>		<b>APPLICATIONS</b>		<b>OPTIONS AVAILABLE</b>				
<ul style="list-style-type: none"> <li>• Pure Color Hues</li> <li>• Pure Green</li> <li>• Pure Amber</li> </ul>		<ul style="list-style-type: none"> <li>• Indicators</li> <li>• Multi-Color Range</li> <li>• Status Indicators</li> <li>• Neutral Status (Amber)</li> </ul>		<ul style="list-style-type: none"> <li>• Add-on Leads</li> <li>• Panel Clips</li> <li>• Color Brightness Sorting</li> <li>• Add-on Spacers</li> </ul>				
LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	V <sub>f</sub> @ 20mA	
	AMBER	PEAK(nm)		TYP.(mcd.)	#(mA)		TYP.	MAX
SSL-LX3054AT	AMBER	610	AMBER TRANS.	50	20	25	2.1	2.8
SSL-LX3054AD	AMBER	610	AMBER DIFF.	18	20	80	2.1	2.8
SSL-LX3054PGT	PURE GREEN	555	GREEN TRANS.	70	20	25	2.1	2.8
SSL-LX3054PGD	PURE GREEN	555	GREEN DIFF.	22	20	80	2.1	2.8
SSL-LX5093AT	AMBER	610	AMBER TRANS.	50	20	25	2.1	2.8
SSL-LX5093AD	AMBER	610	AMBER DIFF.	18	20	80	2.1	2.8
SSL-LX5093PGT	PURE GREEN	655	GREEN TRANS.	70	20	25	2.1	2.8
SSL-LX5093PGD	PURE GREEN	655	GREEN DIFF.	22	20	80	2.1	2.8

See pages 8-14 for Max. operating limits and operating curves

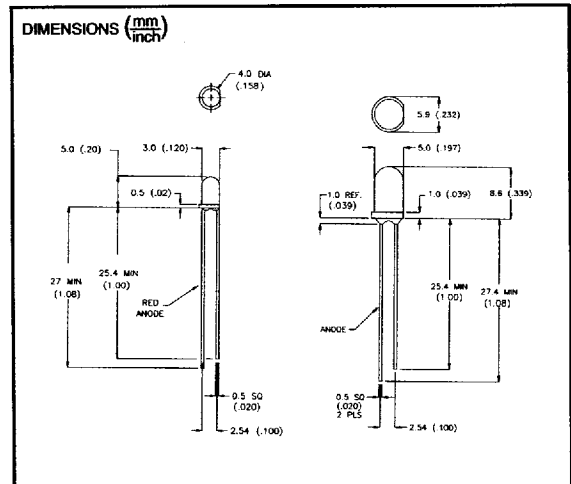

**SSF-LXH20860 SERIES      P.C. LED DUAL PIGGY BACK UNIT**

<b>FEATURES</b>		<b>APPLICATIONS</b>		<b>MATERIAL SPECIFICATIONS</b>			
<ul style="list-style-type: none"> <li>• Easy P.C. Installation</li> <li>• Dual Piggy Back Unit</li> <li>• Choice of Colors, Current</li> </ul>		<ul style="list-style-type: none"> <li>• P.C. Mount Indicator</li> <li>• Fault Indicator</li> <li>• Back Lighting Indicator</li> </ul>		<ul style="list-style-type: none"> <li>• Holder: Black Nylon, UL V94-0</li> <li>• Terminations: 0.5mm □ Leads</li> <li>• Installation: P.C. Mount/Solder</li> </ul>			
LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	RED	PEAK(nm)			TYP (MRD) @	mA	
SSE-LXH20860ID	RED	635	10-25	2.1	8/8	20	SSL-LX3054XX
SSF-LXH20860SRD	RED	660	10-25	1.7	30/30	20	SSL-LX3054XX
SSF-LXH20860GD	GREEN	565	10-25	2.1	8/8	20	SSL-LX3054XX
SSF-LXH20860XD	YELLOW	585	10-25	2.1	8/8	20	SSL-LX3054XX
<b>LOW CURRENT OPTIONS</b>							
SSF-LXH20860LID	RED	635	1-5	1.8	1/1	2	SSL-LX3054XX
SSF-LXH20860LGD	GREEN	565	1-5	1.8	1/1	2	SSL-LX3054XX
SSF-LXH20860LYD	YELLOW	585	1-5	1.8	1/1	2	SSL-LX3054XX

COLOR COMBINATIONS OPTIONS AVAILABLE

See pages 8-14 for Max. operating limits and operating curves

