


Plate Capacitors for Higher Voltages

PEZ 140 15KV to 30KV

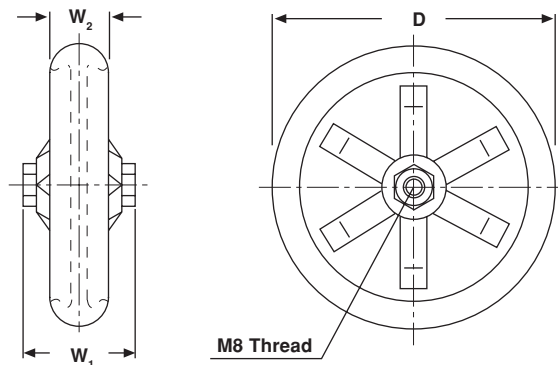

PEZ 140										
CERAMIC	CAPACITANCE VALUE	RATED RF VOLTAGE **	RATED DC VOLTAGE AT 50°C	RATED DC VOLTAGE AT 70°C	RATED POWER AT 50°C *	RATED POWER AT 70°C *	RATED CURRENT	D ± 10%	W ₂ ± 3 (±0.12)	W ₁ ± 3 (±0.12)
	[pF]	[KV]	[KV _{DC}]	[KV _{DC}]	[KVA _r]	[KVA _r]	[A _{RMS}]			
R 85	600	30	25	25	90	60	max.35	140 (5.51)	30 (1.181)	52 (2.047)
	800	30	25	20			max.45		30 (1.181)	51 (2.008)
	1000	25	21	17			max.45		30 (1.181)	49 (1.788)
	1500	15	13	10			max.45		27 (1.063)	46 (1.678)
	2000	15	13	10			max.45		26 (1.024)	
	2500	15	13	10			max.45		26 (1.024)	

*The surface temperature of 100°C must not be exceeded

**Peak-to-peak value

CAPACITANCE TOLERANCES: ± 10%

MATERIAL:

Capacitor elements made from Class 1-ceramic dielectric with noble metal electrodes.

Connection Terminals: Copper/brass, silver plated.

FINISH:

Noble metal electrodes and Contoured rim glazed

MARKING:

Type designator, Capacitance value and tolerance, Rated voltage (RF), Rated voltage (DC value at 50°C), Production date code, Ceramic material code, DRALORIC Logo.

ACCESSORIES ADDED:

Screws and washers

ORDERING INFORMATION				
PEZ 140	30KV	600pF	± 10%	R 85
MODEL	RATED VOLTAGE	CAPACITANCE VALUE	TOLERANCE	CERAMIC