



CES5622 is a surface mount 4-winding common mode inductor. It is specifically designed to suppress EMI on the 4-wire S-Bus in the ISDN system.

The windings are extremely well balanced in order to provide the required Longitudinal Balance laid down in CCITT I.430.



**MECHANICAL**

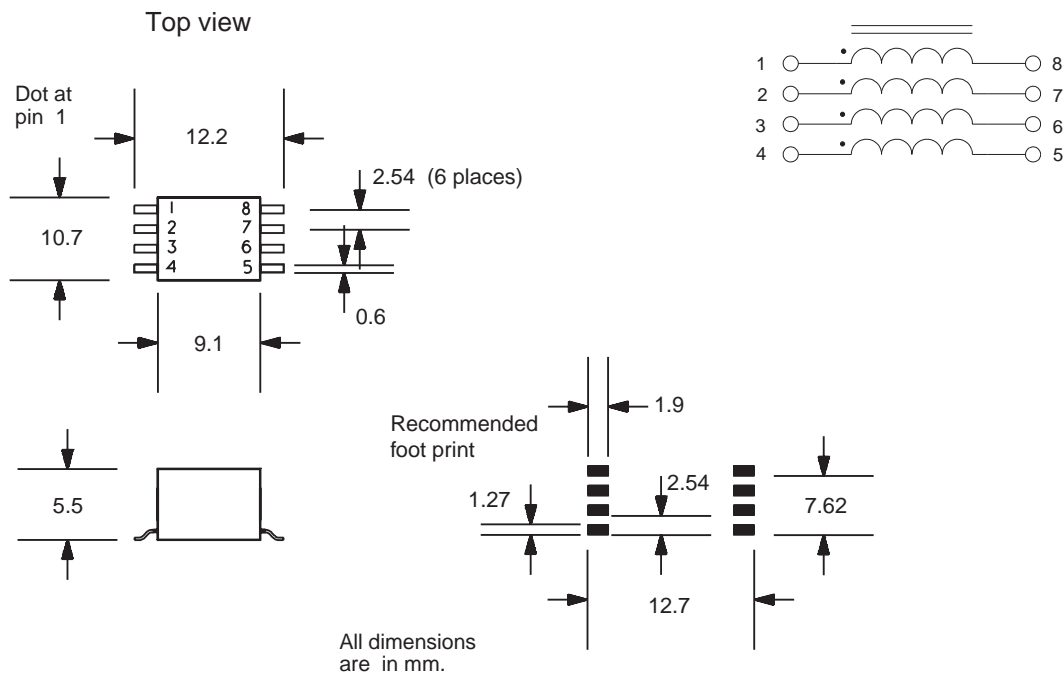

**ELECTRICAL SPECIFICATION**

DCR	(Ohms)	each winding	3.4
Inductance	(mH)	each winding	4.7
Rated current	(mA dc)		100
Dielectric Strength	(V rms)		500

ISSUE: B 96/08/07 5622.chip