




- Recommended for CS6152/54, DS185/86/87, ATT7288/90
- Robust construction allows for most severe soldering processes
- Meets CCITT I.430 Requirements with proper termination
- Add “-RC” after part number for RoHS Compliant
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

Primary Inductance (mH Min.)		Interwinding Capacitance (pF Max.)		Leakage Inductance (µH Max.)		Primary DCR (Max.)		Secondary DCR (Max.)	
@ 100 KHz, 0.1 Vrms		@ 100 KHz, 0.1 Vrms		@ 100 KHz, 0.1 Vrms					
T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
1.6	1.6	60	50	1.0	0.8	1.5	1.5	2.0	1.7

Package

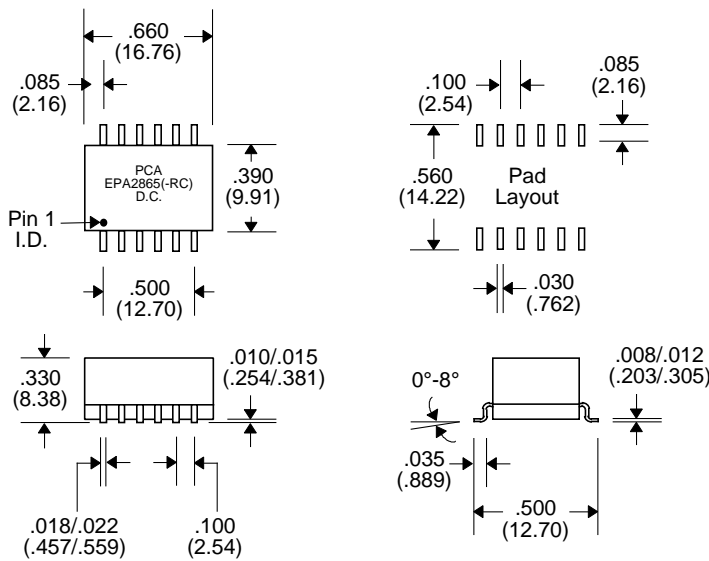

Schematic



Notes :	EPA2865	EPA2865-RC
1. Lead Finish	SnPb	Matte Tin
2. Peak Temperature Rating	225°C	260°C
3. Moisture Sensitive Levels	MSL = 3 (168 Hours, 30°C/60%RH)	MSL = 4 (72 Hours, 30°C/60%RH)
4. Weight	TBD grams	TBD grams
5. Packaging Information (*Add "TR" to end of part number when placing order)	(Tube)	TBD pieces/tube
	(Tape & Reel)	TBD pieces/13" reel (*EPA2865-TR)
		TBD pieces/13" reel (*EPA2865-RCTR)

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25