



YT2462B

SERVO MOTER MOTROL FOR RADIO CONTROL

Description

The YT2462B is a semiconductor integrated circuit for servo control applications.

Features

- Excellent power supply stability and temperature stability
- Simple setting of dead of band range
- Small outline (16pin TSSOP)


Applications

- Digital proportional systems for radio control, servo motor control ,etc

Recommended Operating Conditions

- Supply Voltage range : 3.5V to 7.5 V
- Operating temperature : -20 to 75°C
- Input rise time : 500 nS max.
- Input fall time : 500 nS max.


Block Diagram

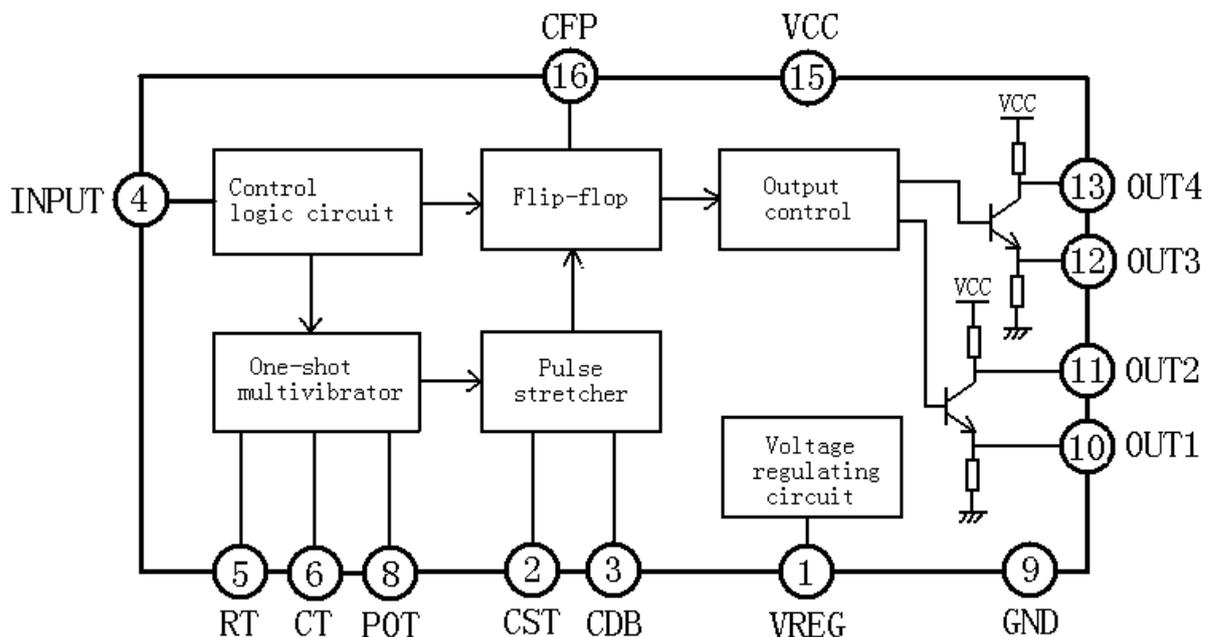



YT2462B

Pin Arrangement

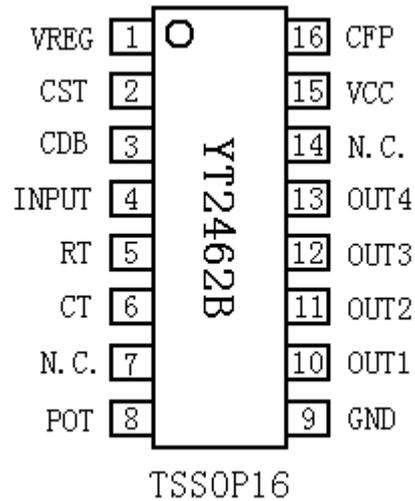

Pin Description

Pin No.	Symbol	Function	Descriptions
1	VREG	Regulated voltage source	This is output of the internal regulated supply voltage. Make connections from this pin to pot-entiometer and pulse stretcher resistor.
2	CST	Stretcher pin	Connect the capacitor and resistor of the pulse stretcher section.
3	CDB	Dead band setting pin	Connect the capacitor and band can be changed according the value of this capacitor.
4	INPUT	Input pin	
5	RT	Constant setting pin	Connect a capacitor that will determine the constant current value of pin 6. Constant current will became 100 μ A at the time of the resistance of 18 k Ω
6	CT	Local pulse setting pin	Connect a capacitor that will adjust a triangular wave made by charging of constant current.
7	N.C.	No connection	
8	POT	Servo position voltage input pin	Connect to the potentiometer for the position detection connected with the output axis.
9	GND	Grounding pin	Grounding
10	OUT1	Output 1	Connect to the base of the external NPN transistor
11	OUT2	Output 2	Connect to the base of the external PNP transistor
12	OUT3	Output 3	Connect to the base of the external NPN transistor
13	OUT4	Output 4	Connect to the base of the external PNP transistor
14	N.C.	No connection	
15	VCC	Supply voltage	Connect a capacitor of more than 10 μ F.
16	CFP	Fixed driving pulse setting pin	Connect a capacitor that will determine the fixed driving pulse width.




YT2462B

Absolute Maximum Ratings

(VCC = 5V, Ta = 25°C, unless otherwise noted)

Symbol	Parameter	Test conditions	Ratings	Unit
VCC	Supply voltage		9.0	V
IO	Output current	OUT1 to OUT4	40	mA
PD	Power dissipation		300	mW
Kθ	Thermal derating range	Ta ≥ 25°C	-3.0	mW/°C
Tstg	Storage temperature		-40 to 125	°C

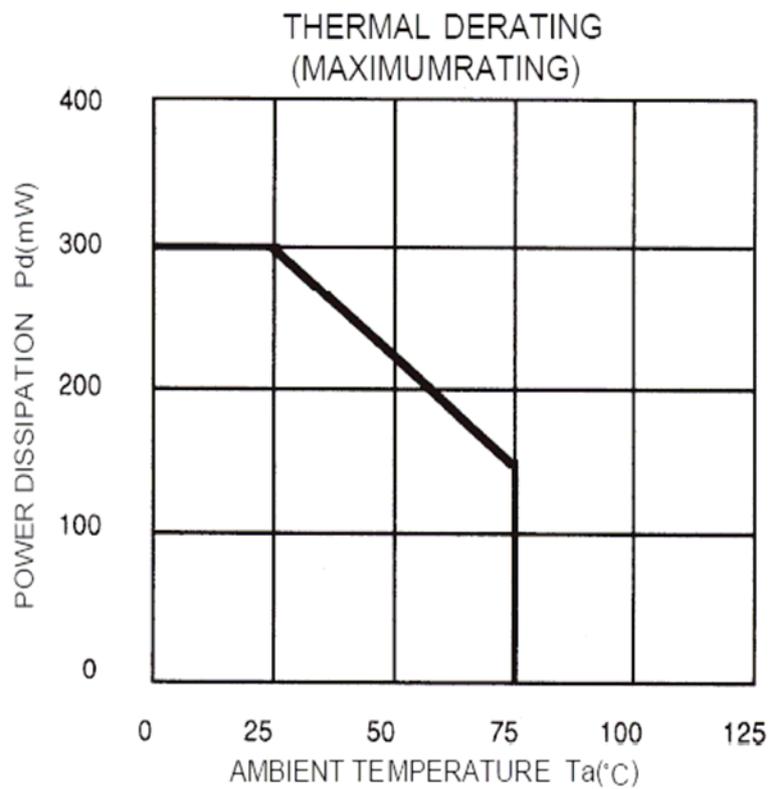



YT2462B

Electrical Characteristics


(VCC = 5.0 V, Ta = 25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
VCC	Supply voltage		2.8	5.0	7.5	V
ICC1	Circuit Current 1	Output off	—	5.0	10.0	mA
ICC2	Circuit Current 2	Output on	—	6.0	11.0	mA
Vreg	Regulated voltage	No load	2.35	2.5	2.65	V
dVreg	Regulated voltage precision	VCC = 3.5 to 6.5 V	—	0.2	—	%/V
Iref	Reference current	RT = 18 kΩ, Pin 5 current value	90	100	110	μA
Vih	High input voltage	Pin4	2.0	—	Vcc	V
WL	Standard local pulse width	RT = 18 kΩ, CT = 0.1 μF	1.4	1.5	1.6	ms
dWL	Supply voltage dependence of the local pulse width	VCC = 3.5 to 6.5 V VCC = 2.5 to 7.5 V	—	—	2.0 15.0	μs/V
Wdb1	Minimum dead bandwidth	CFP = 0.01μF Not connect CDB	—	—	1.0	μs
Wdb2	Standard driving band width	Not connect CFP and CDB	—	2.5	6.0	μs
AST	Stretcher gain	RT = 18 kΩ RST = 120 kΩ CST = 0.1 μF	—	100	—	times
WKP	Fixed driving pulse width	CFP = 0.01μF Not connect CDB	0.7	1.0	1.3	ms
WCP	Standard driving pulse width	Not connect CFP and CDB	0.3	0.5	0.8	ms
Wout	Output pulse width	CST = 0.1 μF RST = 120 kΩ Pulse width 100μs (3pin)	8.0	10.0	12.0	ms
Vosat	Output pin saturation voltage	ISINK = 20 mA	—	0.2	0.4	V



YT2462B


Typical Characteristics

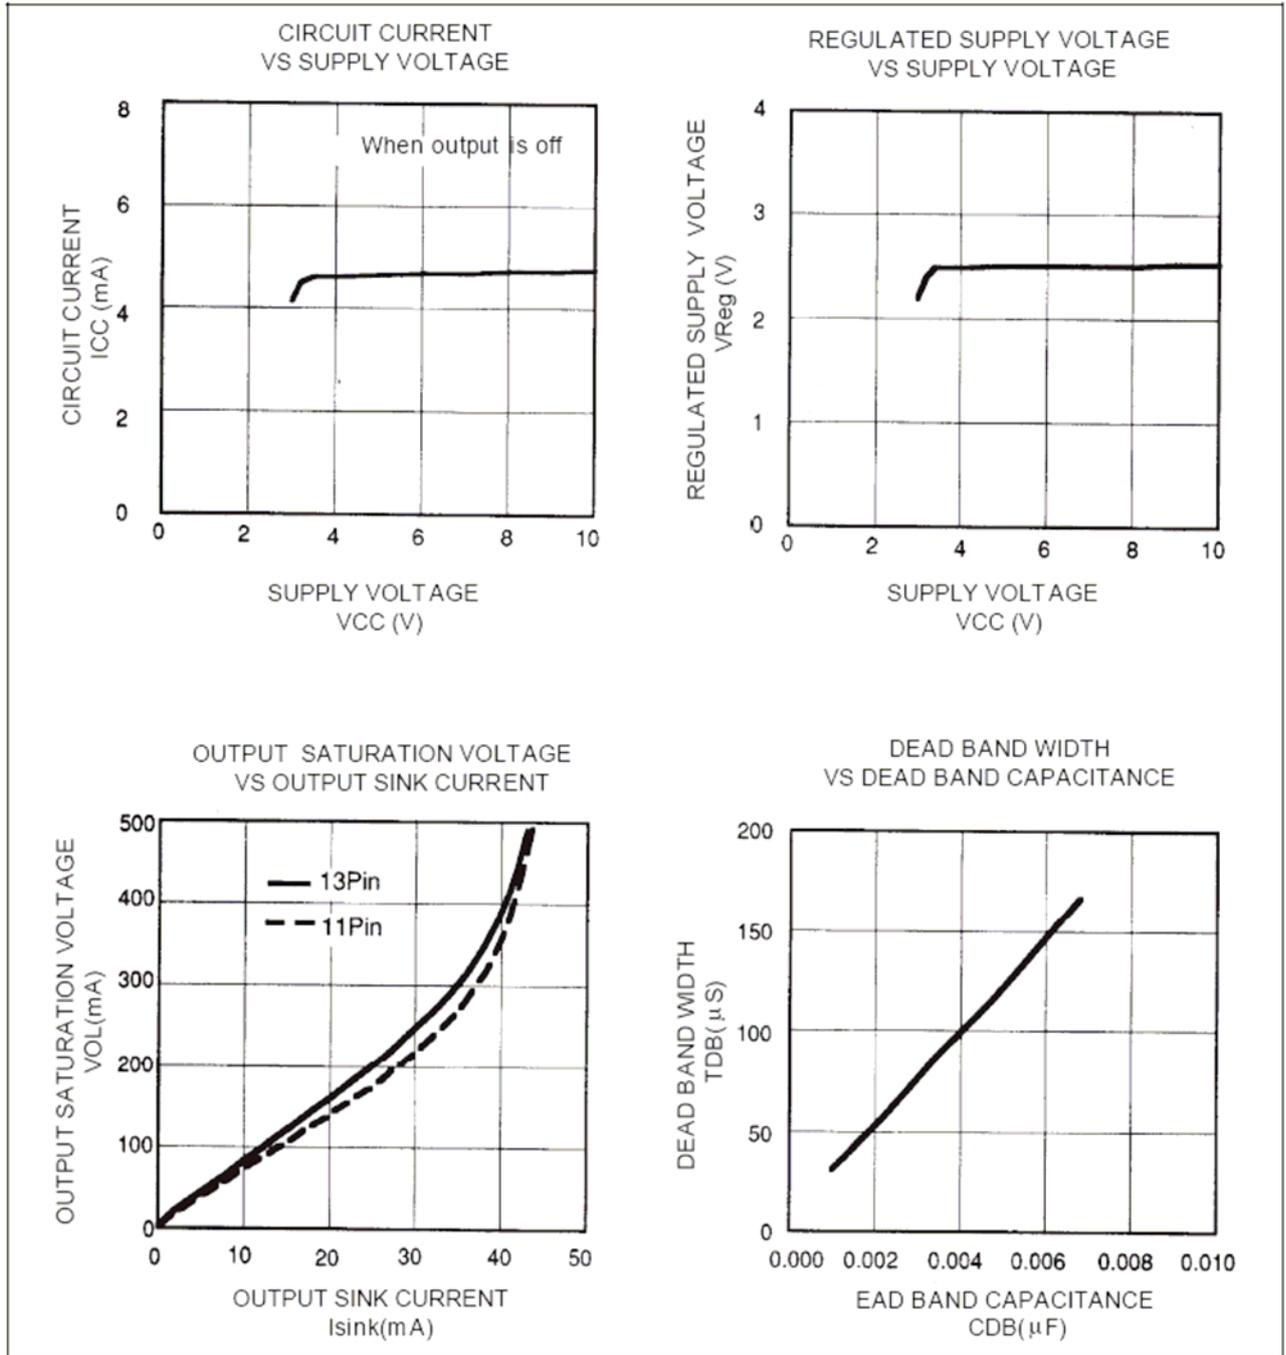



YT2462B

TSSOP16 PACKAGE OUTLINE DIMENSIONS

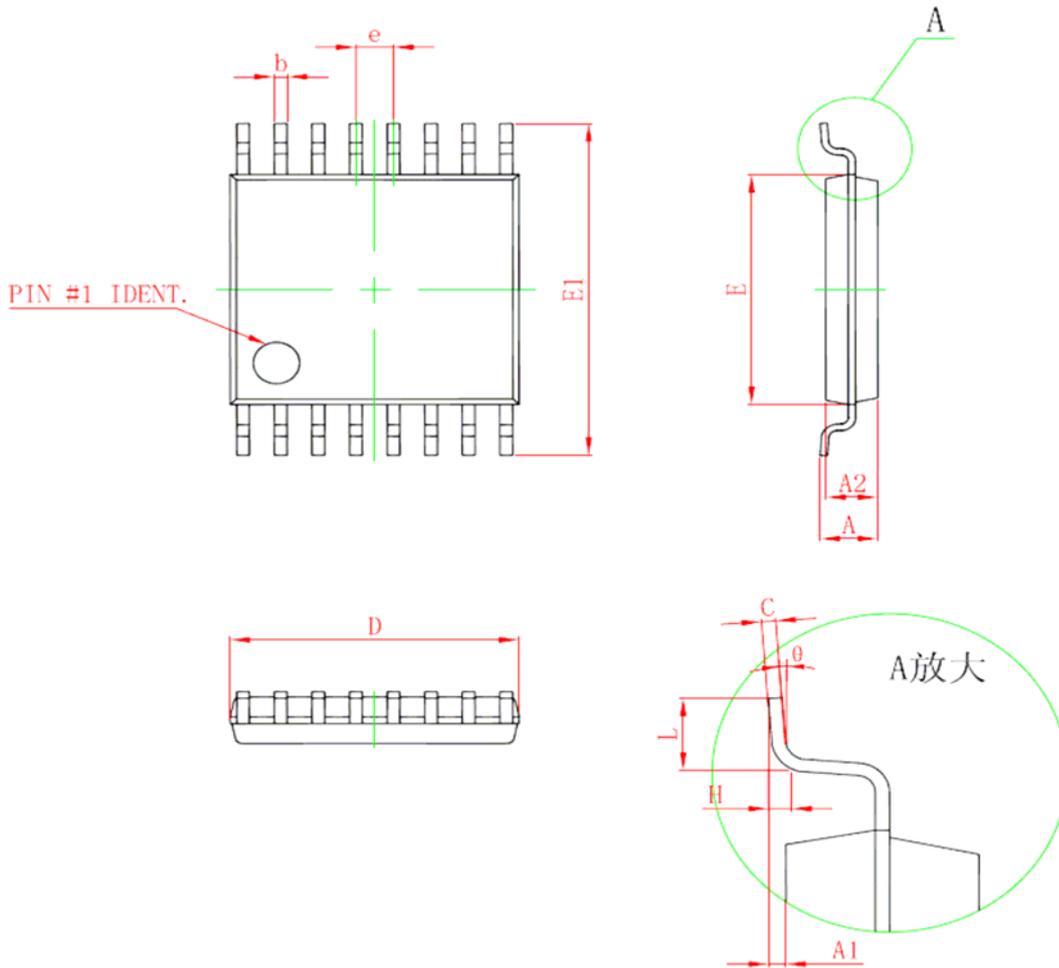

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
D	4.900	5.100	0.193	0.201
E	4.300	4.500	0.169	0.177
b	0.190	0.300	0.007	0.012
C	0.090	0.200	0.004	0.008
E1	6.200	6.600	0.224	0.260
A	1.1 MAX TYP		0.043 MAX TYP	
A2	0.850	0.950	0.033	0.037
A1	0.050	0.150	0.002	0.006
e	0.65 TYP		0.026 TYP	
L	0.500	0.700	0.020	0.028
H	0.250		0.010	
theta	1°	7°	1°	7°