


NS346 Calibrated Noise Sources

NS346C-2

10 MHz to 26500 MHz

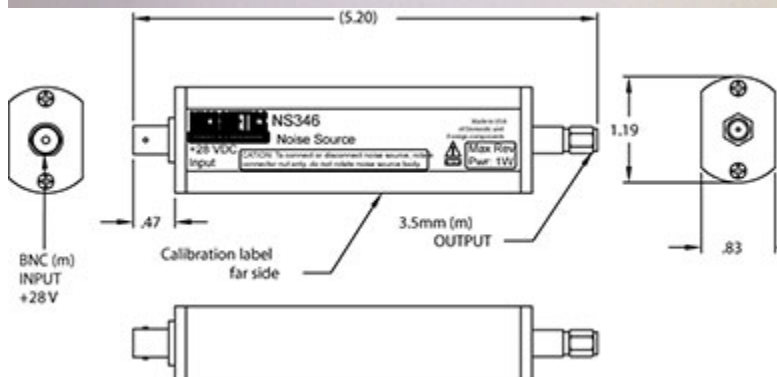

Specifications

RF Frequency	10 MHz to 26500 MHz
Noise Output	13 to 17 dB ENR
Noise Spectral Density (N_0)	-159 dBm/Hz
VSWR	1.15:1 Max (0.01 - 5 GHz) 1.25:1 Max (5 - 18 GHz) 1.50:1 Max (18 - 26.5 GHz)
Peak Factor	5:1
Bias Voltage	28 V
Supply Current	25 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	Coaxial
Package Type	APC 3.5 mm

Environmental

Operating Temperature	-55 to 95 °C
Storage Temperature	-65 to 125 °C

Notes

15 VDC available upon request

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

