




Size: AA (LR6)


Alkaline-Manganese Dioxide Battery

Zn/MnO

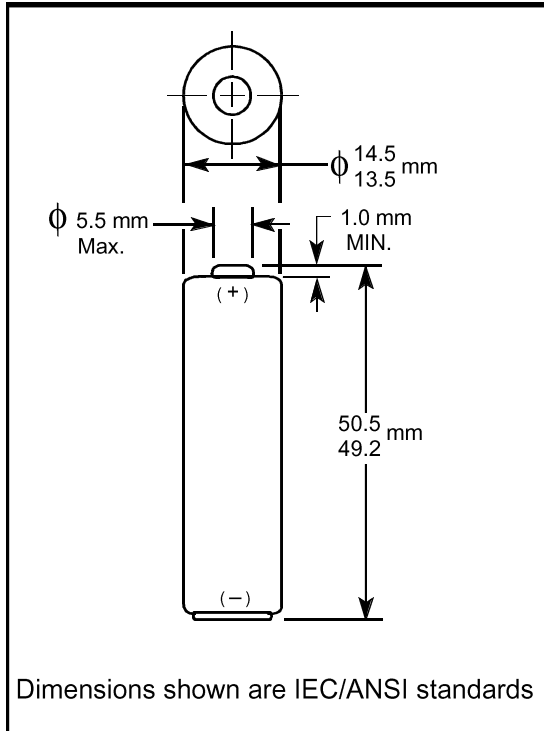


| | |
|------------------------------|--|
| Nominal Voltage: | 1.5 V |
| Nominal Internal Impedance: | 81 m-ohm @ 1kHz |
| Average Weight: | 24.4 gm (0.86 oz.) |
| Volume: | 8.4 cm ³ (0.51 in. ³) |
| Terminals: | Flat |
| Operating Temperature Range: | -20°C to 54°C (-4°F to 130°F) |
| ANSI: | 15A |
| IEC: | LR6 |

Discharge Characteristics at Various Power Drains

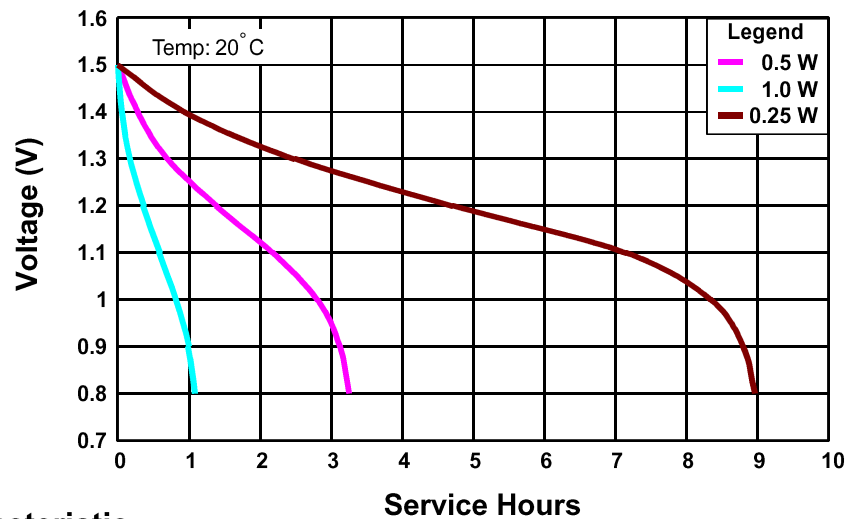

Typical Ultra AA Discharge Characteristic

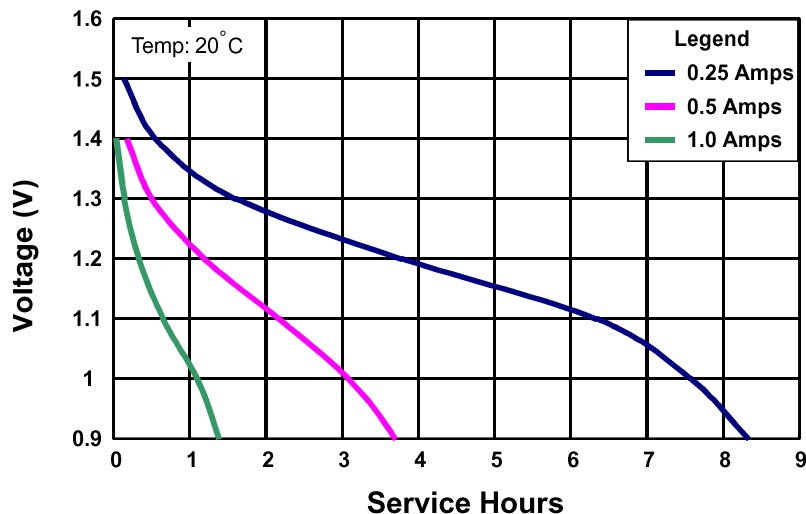


* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.




Size: AA (LR6)
Alkaline-Manganese Dioxide Battery

Zn/MnO₂


Delivered Energy vs Power Drain

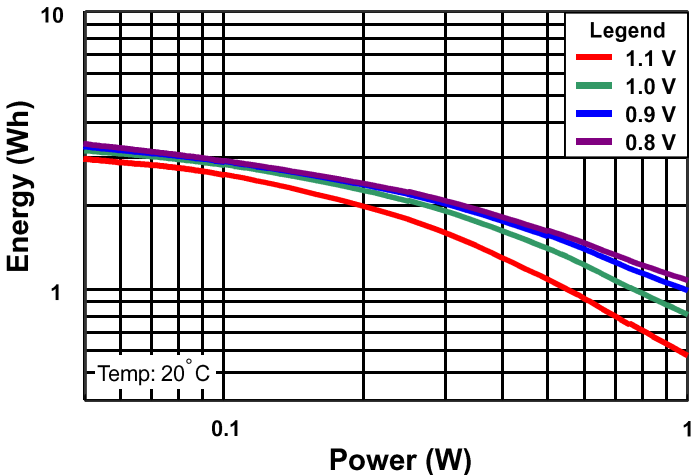

Delivered Capacity vs Power Drain

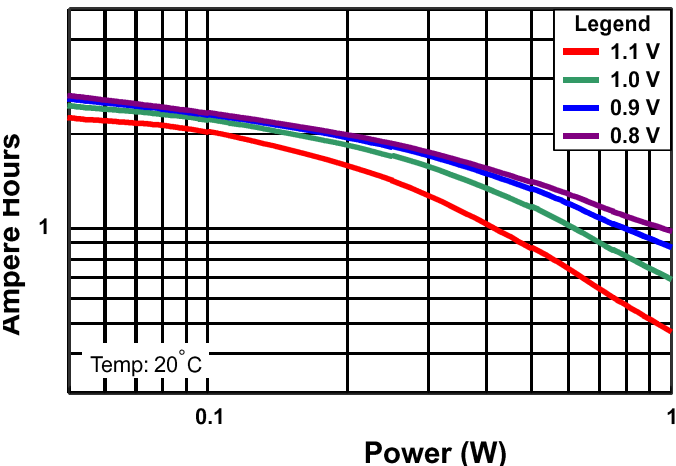

Service Hours vs Power Drain

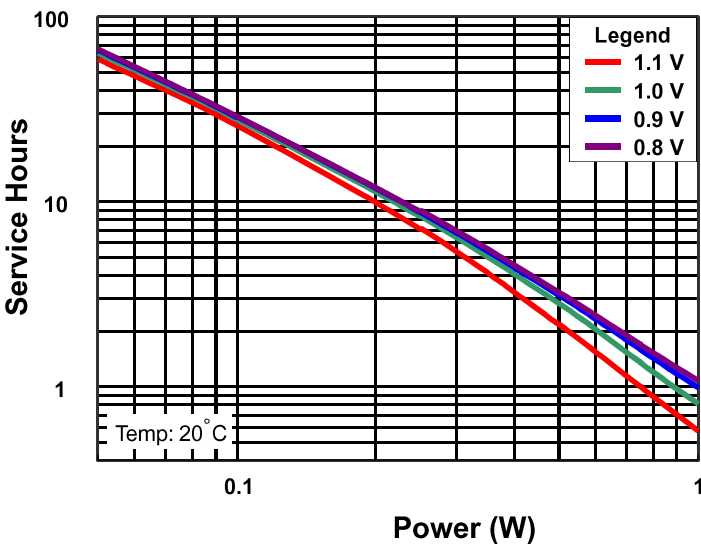

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-334-2656
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.