



SOLID STATE DEVICES, INC.

14830 Valley View Blvd * La Mirada, Ca 90638
 Phone: (562) 404-7855 * Fax: (562) 404-1773

DESIGNER'S DATA SHEET

FEATURES:



- Advanced high-cell density withstands high energy
- Very low conduction and switching losses
- Fast recovery drain-to-source diode with soft recovery
- Rugged construction with poly silicon gate
- Ultra low RDS (on) and high transconductance
- Excellent high temperature stability
- Very fast switching speed
- Fast recovery and superior dv/dt performance
- Increased reverse energy capability
- Low input and transfer capacitance for easy paralleling
- Hermetically sealed package
- TX, TXV and Space Level screening available

SFF75N06M
SFF75N06Z

75 AMP
60 VOLTS
15mΩ
N-CHANNEL
POWER MOSFET

TO-254 (M)

TO-254Z (Z)

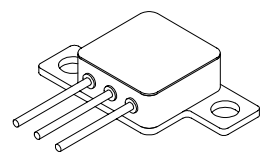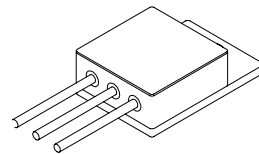

MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Drain to Source Voltage	V _{DS}	60	Volts
Drain to Gate Voltage (RGS = 1.0 mΩ)	V _{DG}	60	Volts
Gate to Source Voltage	V _{GS}	± 20	Volts
Continuous Drain Current	I _D	56 ^A	Amps
Operating and Storage Temperature	T _{op} & T _{stg}	-55 to +150	°C
Thermal Resistance, Junction to Case	R _{θJC}	1	°C/W
Total Device Dissipation	P _D	@ TC = 25°C	125
		@ TC = 55°C	95


CASE OUTLINE: TO-254 (Suffix M)

Pin Out:

Pin 1: Drain

Pin 2: Source

Pin 3: Gate

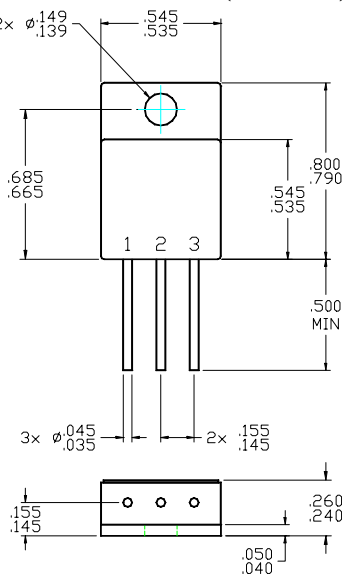


CASE OUTLINE: TO-254Z (Suffix Z)

Pin Out:

Pin 1: Drain

Pin 2: Source

Pin 3: Gate

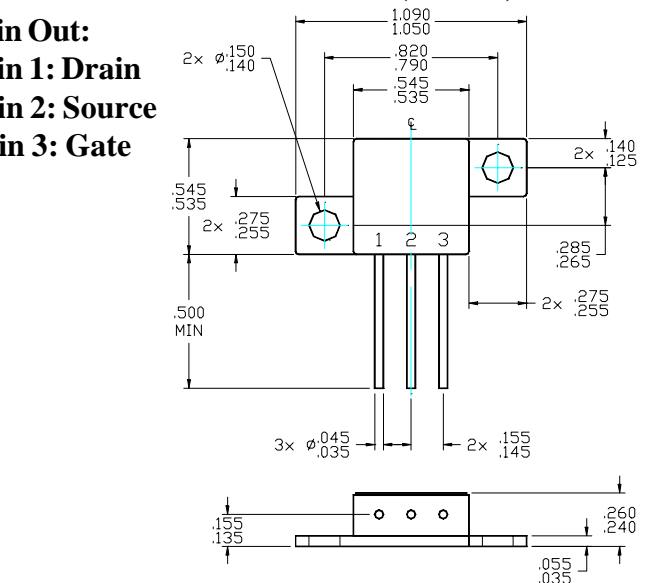

Available with Glass or Ceramic Seals. Contact Factory for details.

NOTE: All specifications are subject to change without notification.
 SCDs for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: F00311B

SFF75N06M
SFF75N06Z



SOLID STATE DEVICES, INC.

14830 Valley View Blvd * La Mirada, Ca 90638
Phone: (562) 404-7855 * Fax: (562) 404-1773

ELECTRICAL CHARACTERISTICS @ T_J=25°C (Unless Otherwise Specified)

RATING		SYMBOL	MIN	TYP	MAX	UNIT
Drain to Source Breakdown Voltage (V _{GS} =0 V, I _D =250μA)		BV_{DSS}	60	-	-	V
Drain to Source on State Resistance (V _{GS} = 10 V, T _c = 150°C)	I _D =37.5A I _D =75A I _D =37.5A	R_{DS(on)}	- - -	13 15 19	- - -	mΩ
On State Drain Current (V _{DS} > I _{D(on)} x R _{DS(on)} Max, V _{GS} = 10 V)		I_{D(on)}	75	-	-	A
Gate Threshold Voltage (V _{DS} = V _{GS} , I _D = 250μA)		V_{GS(th)}	2	-	4.0	V
Forward Transconductance (V _{DS} > I _{D(on)} X R _{DS(on)} Max, I _{DS} =60% rated I _D)		g_{fs}	15	35	-	Smho
Zero Gate Voltage Drain Current (V _{DS} = 80% rated voltage, V _{GS} = 0V) (V _{DS} = 80% rated V _{DS} , V _{GS} = 0V, T _A = 125°C)		I_{DSS}	- -	- -	250 1000	μA
Gate to Source Leakage Forward Gate to Source Leakage Reverse	At rated V _{GS}	I_{GSS}	- -	- -	+100 -100	nA
Total Gate Charge Gate to Source Charge Gate to Drain Charge	V _{GS} = 10 V 50% rated V _{DS} Rated I _D	Q_g Q_{gs} Q_{gd}	- - -	80 13 40	120 17 64	nC
Turn on Delay Time Rise Time Turn off Delay Time Fall Time	V _{DD} = 50% rated V _{DS} 50% rated I _D R _G = 6.2Ω	t_{d(on)} t_r t_{d(off)} t_f	- - - -	20 35 65 40	27 66 100 60	nsec
Diode Forward Voltage (I _S = rated I _D , V _{GS} = 0V, T _J = 25°C)		V_{SD}	-	1.47	1.4	V
Diode Reverse Recovery Time Reverse Recovery Charge	T _J = 25°C I _F = 10 di/dt = 100A/μsec	t_{rr} Q_{RR}	-	70	150	nsec
Input Capacitance Output Capacitance Reverse Transfer Capacitance	V _{GS} = 0 Volts V _{DS} = 25 Volts f = 1 MHz	C_{iss} C_{oss} C_{rss}	- - -	2600 700 260	2900 1100 275	pF

For thermal derating curves and other characteristic curves please contact SSDI Marketing Department.

NOTES:

1/ Maximum current limited by package, die rated at 75A.