



Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

SR802 THRU SR810

Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Low Forward Voltage Drop and Low Switching Noise
- High Current Capability and High Surge Current Capability
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

- Operating Temperature: -55°C to +125°C
 Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 30°C/W Junction To Lead

MCC	Device	Maximum	Maximum	Maximum
Catalog	Marking	Recurrent	RMS	DC
Number		Peak	Voltage	Blocking
		Reverse		Voltage
		Voltage		
SR802	SR802	20V	14V	20V
SR803	SR803	30V	21V	30V
SR804	SR804	40V	28V	40V
SR8045	SR8045	45V	31.5V	45V
SR805	SR805	50V	35V	50V
SR806	SR806	60V	42V	60V
SR808	SR808	80V	56V	80V
SR810	SR810	100V	70V	100V

Electrical Characteristics @ 25°C Unless Otherwise Specified


Average Forward	I _{F(AV)}	8.0A	T _A = 90°C
Current	-1 (/(V)		1 A 66 6
Peak Forward Surge	I _{FSM}	150A	8.3ms, half sine
Current			
Maximum			
Instantaneous			
Forward Voltage			
SR802-SR8045	V_{F}	.65V	$I_{FM} = 8.0A;$
SR805-SR806		.70V	$T_J = 25^{\circ}C$
SR808-SR810		.85V	
Maximum DC			
Reverse Current At	I _R	0.5mA	T _J = 25°C
Rated DC Blocking		50mA	$T_{\rm J} = 100^{\circ}{\rm C}$
Voltage			
Typical Junction			
Capacitance		500 F	
SR802-SR8045	\mathbf{C}_{J}	500pF	Measured at
SR805-SR806		380pF	1.0MHz, V _R =4.0V
SR808-SR810		165pF	

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

Barrier Rectifier 20 - 100 Volts

8 Amp Schottky

DO-201AD

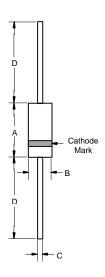


DIMENSIONS						
	INCHES		MM			
DIM	MIN	MAX	MIN	MAX	NOTE	
Α	.287	.374	7.30	9.50		
В	.189	.208	4.80	5.30		
С	.048	.052	1.20	1.30		
D	1.000		25.40			

SR802 thru SR8010




Micro Commercial Components

Figure 1 Typical Forward Characteristics

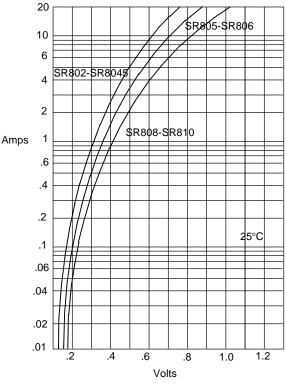


Instantaneous Forward Current - Amperes*versus* Instantaneous Forward Voltage - Volts

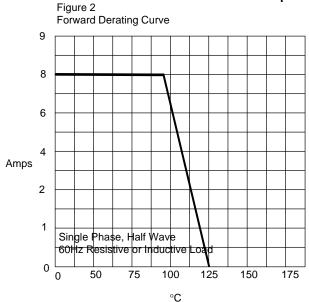


Average Forward Rectified Current - Amperes/ersus Ambient Temperature - $^{\circ}$ C

Figure3
Maximum Non-Repetitive Forward Surge Current

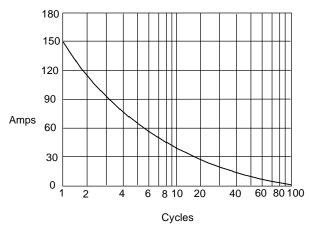

Peak Forward Surge Current - Amperes*versus* Number Of Cycles At 60Hz - Cycles

Figure 4
Junction Capacitance

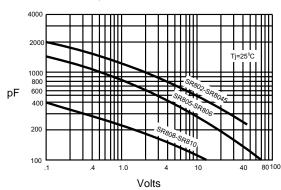

Junction Capacitance - pF *versus* Reverse Voltage - Volts



Micro Commercial Components

Ordering Information:

Device	Packing	
Part Number-TP	Tape&Reel: 1.2Kpcs/Reel	
Part Number-AP	Ammo Packing: 1.2Kpcs/Ammo Box	
Part Number-BP	Bulk: 12Kpcs/Carton	

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.