

E-Series Surface Mount Mixer

20 - 2500 MHz

ESMD-C3H

V3.00

Features

- LO Power: +17 dBm, ESMD-C3H
+13 dBm, ESMD-C3MH
- Up to +14 dBm RF, ESMD C3H
- Up to +9 dBm RF, ESMD-C3MH
- Surface Mount

Specifications @ 25°C

Frequency Range		
RF		20 - 2500 MHz
LO		20 - 2500 MHz
IF		20 - 600 MHz
Conversion Loss (dB)		
40 - 1250 MHz	Typical 8.0	Maximum 9.0
20 - 2500 MHz	9.0	10.5
Isolation (dB)		
LO to RF	Typical	Minimum
20 - 200 MHz	45	30
200 - 1250 MHz	30	23
1250 - 2500 MHz	30	15
LO to IF		
20 - 200 MHz	40	20
200 - 1250 MHz	25	15
1250 - 2500 MHz	25	12

Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	+14 dBm, ESMD-C3H +9 dBm, ESMD-C3MH


Ordering Information

Part No.	Packaging
ESMD-C3H	Tubes
ESMD-C3HTR	Tape & Reel
ESMD-C3MH	Tubes
ESMD-C3MHTR	Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	200 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature (10 Seconds)	260°C

SM-2

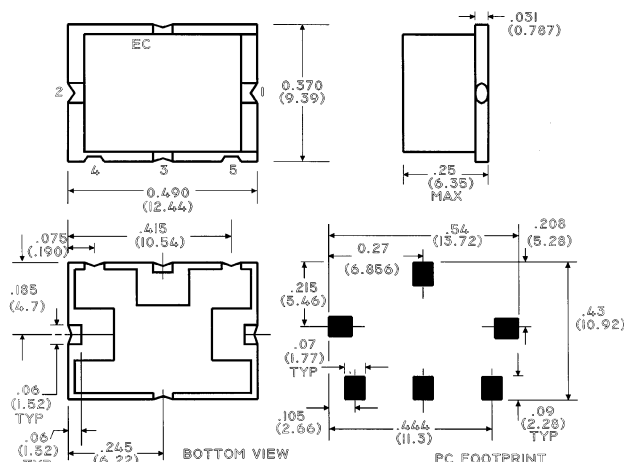

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
LO	2
RF	1
IF	3
Ground	4,5

S 0165 C, S 0168 C

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020