

**Micro Commercial Components** 



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939

# SB1520 THRU SB15100

15 Amp Schottky

**Barrier Rectifier** 

### Features

- Low Forward Voltage Drop
- High Current Capability and High Surge Current Capability
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1


## **Maximum Ratings**

- Operating Temperature SB1520~SB1540: -65°C to +125°C SB1550~SB15100: -65°C to +150°C
- Storage Temperature: -65°C to +150°C

	Maximum		Maximum DC
MCC	Recurrent Peak	Maximum	Blocking
Part Number	Reverse Voltage	RMS Voltage	Voltage
SB1520	20V	14V	20V
SB1530	30V	21V	30V
SB1540	40V	28V	40V
SB1550	50V	35V	50V
SB1560	60V	42V	60V
SB1580	80V	56V	80V
SB15100	100V	70V	100V

<b>Electrical Characteristics</b>	@ JEOC LINIACO	Othonwice Creating
FIELITICAL CHALACTERISTICS	@ 25 UUUESS	Unerwise Specified
	- LO 0 01110000	

Average Ferward			1
Average Forward	F(AV)	15.0A	$T_A = 90^{\circ}C$
Current			
Peak Forward Surge	I <sub>FSM</sub>	300A	8.3ms, half sine
Current			
Maximum			
Instantaneous			
Forward Voltage			
SB1520~SB1540	VF	.60V	I <sub>FM</sub> = 15.0A;
SB1550~SB1560	'	.72V	$T_A = 25^{\circ}C(Note 2)$
SB1580~SB15100		.85V	
Maximum DC			
Reverse Current At	I <sub>R</sub>	0.5mA	T₄ = 25°C
Rated DC Blocking	-10	50mA	$T_{A} = 100^{\circ}C$
Voltage		0011#1	
Typical Junction	CJ		
Capacitance	OJ		
SB1520~SB1540		500pF	Measured at
SB1550~SB15100		380pF	1.0MHz, V <sub>R</sub> =4.0V
Typical Thermal		_	
Resistance	$R_{thJA}$	15°C/W	

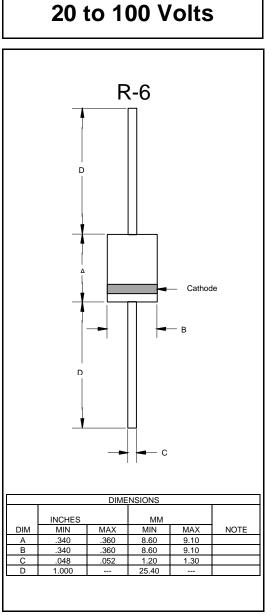

# www.mccsemi.com

2011/01/01

## SB1520~SB15100



Micro Commercial Components

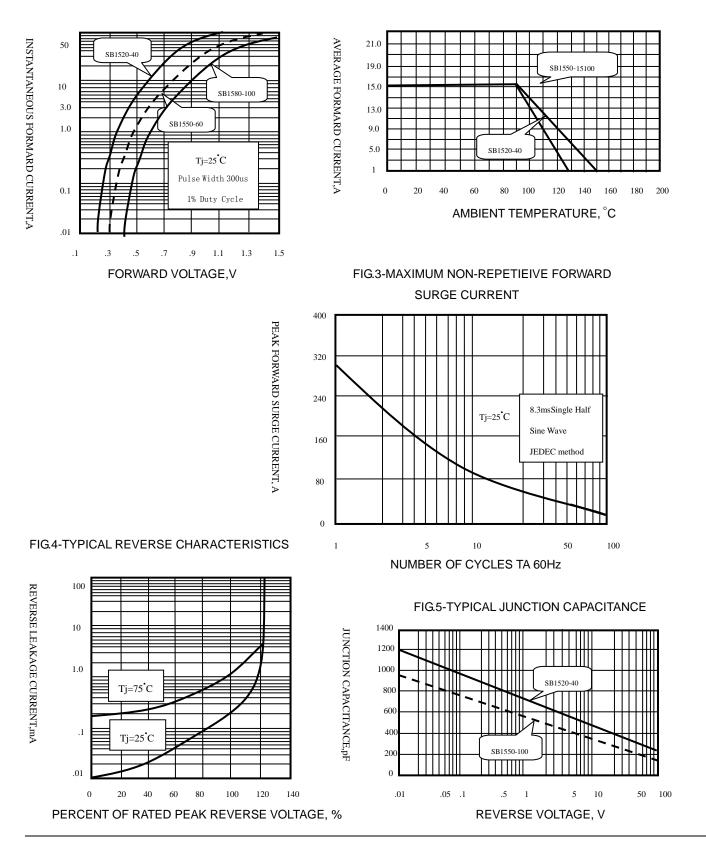


FIG.1-TYPICAL FORWARD CHARACTERISTICS

FIG.2-TYPICAL FORWARD CURRENT DERANTING CURVE

www.mccsemi.com



### **Ordering Information :**

Device	Packing		
Part Number-TP	Tape&Reel: 500pcs/Reel		
Part Number-AP	Ammo Packing: 450pcs/Ammo Box		
Part Number-BP	Bulk: 4.8Kpcs/Carton		

### **\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

#### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

