

T-1^{3/4} (5 mm), T-1 (3 mm), High Performance, Tinted, Diffused, AlInGaP, and TS AlGaAs Red LED Lamps

Technical Data

HLMA-DX05 Series
HLMA-KX05 Series
HLMP-D1XX Series
HLMP-J100/J150 Series

Features


- High Light Output Over a Wide Range of Currents
- Popular T-1 and T-1^{3/4} Packages
- Choice of Three Colors
Amber
Reddish-Orange
Deep Red
- Wide Viewing Angles
- Long Life: Solid State Technology
- Available on Tape and Reel

Applications

- Outdoor Message Boards
- Automotive Lighting
- Portable Equipment
- Medical Equipment
- Changeable Message Signs

Description

The HLMA-D/KXXX series tinted, diffused, solid state lamps utilize the newly developed aluminum indium gallium phosphide (AlInGaP) LED technology. This technology has a very high luminous efficiency, capable of producing high light output over a wide range of drive currents. These LED lamps are available with a choice of two colors, 592

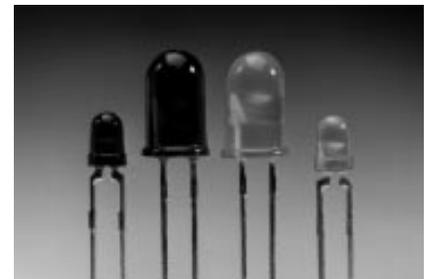

nm amber and 615 nm reddish-orange, and with two viewing angles, 65° and 60°.

The HLMP-D/JXXX series tinted, diffused solid state lamps utilize the highly optimized transparent substrate aluminum gallium arsenide (TS AlGaAs) LED technology. This technology has a very high luminous efficiency,

Device Selection Guide


| Package Description | Viewing Angle 2θ ^{1/2} | Amber λ _d = 592 nm | Reddish-Orange λ _d = 615 nm | Deep Red λ _d = 644 nm | Package Outline |
|---|------------------------------------|----------------------------------|---|-------------------------------------|-----------------|
| T-1 ^{3/4} (5 mm), Tinted, Diffused, Standard Current | 65° | HLMA-DL05 | HLMA-DH05 | | A |
| T-1 (3 mm), Tinted, Diffused, Standard Current | 60° | HLMA-KL05 | HLMA-KH05 | | B |
| T-1 ^{3/4} (5 mm), Tinted, Diffused, Standard Current | 40° | | | HLMP-D115 | A |
| T-1 ^{3/4} (5 mm), Tinted, Diffused, Standard Current | 25° | | | HLMP-D120 | A |
| T-1 (3 mm), Tinted, Diffused, Standard Current | 55° | | | HLMP-J100 | C |
| T-1 (3 mm), Tinted, Diffused, Diffused, Low Current | 55° | | | HLMP-J150 | C |

capable of producing high light output over the wide range of drive currents from 500 μ A to 50 mA. The color is deep red at a

dominant wavelength of 644 nm. TS AlGaAs is a flip-chip LED technology, die attached to the anode lead and wire bonded to

the cathode lead. Available viewing angles are 25°, 40°, and 55°.

Package Dimensions

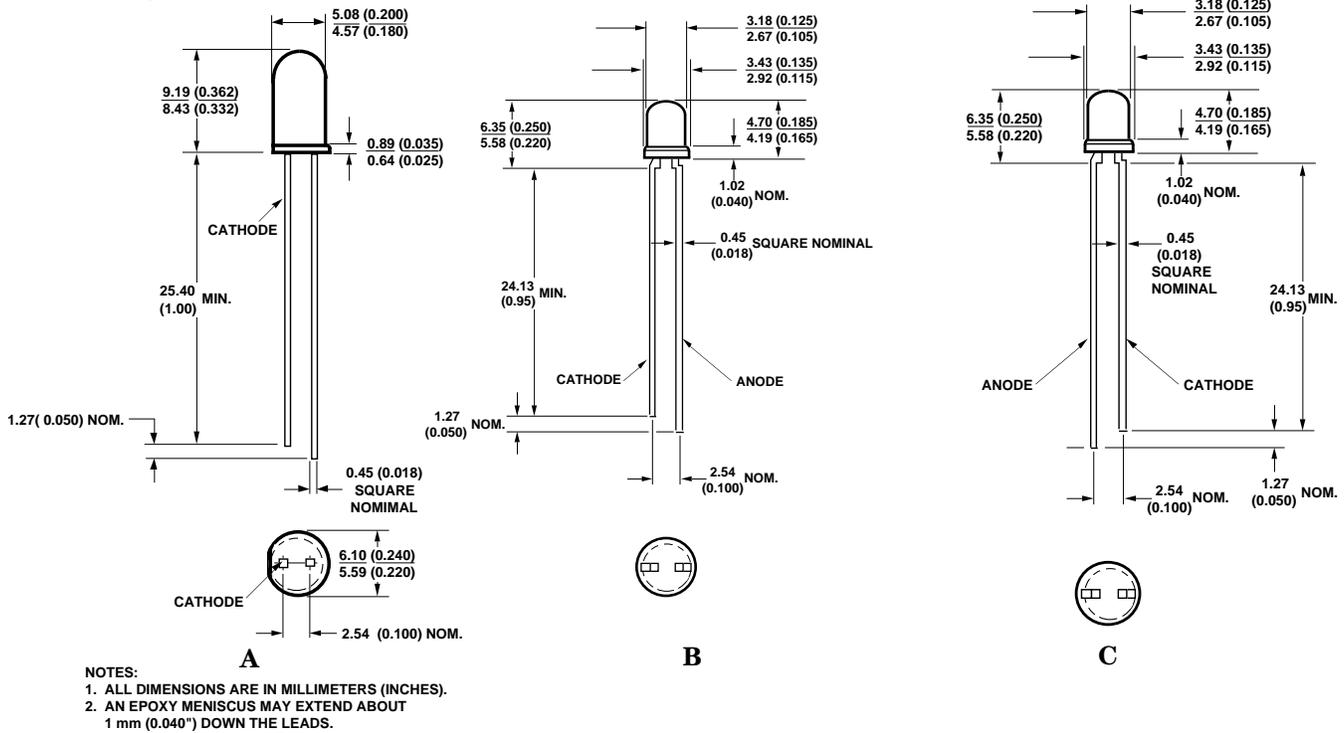

HLMA-DL05/DH05/KI05/KH05 AlInGaP Lamps Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

| Parameter | HLMA-DL05 | HLMA-DH05 | HLMA-KL05 | HLMA-KH05 | Units |
|---|-----------------------------------|-------------|-------------|-------------|------------------|
| DC Forward Current ^[1,3,4] | 50 | 50 | 50 | 50 | mA |
| Peak Forward Current ^[2] | 200 | 200 | 200 | 200 | mA |
| Average Input Power ^[2] | 103 | 103 | 103 | 103 | mW |
| Reverse Voltage ($I_R = 100 \mu\text{A}$) | 5 | 5 | 5 | 5 | V |
| Operating Temperature Range | -40 to +100 | -40 to +100 | -40 to +100 | -40 to +100 | $^\circ\text{C}$ |
| Storage Temperature Range | -55 to +100 | -55 to +100 | -55 to +100 | -55 to +100 | $^\circ\text{C}$ |
| Junction Temperature | 110 | | | | $^\circ\text{C}$ |
| Soldering Temperature [1.59 mm (0.06 in.) below seating plane] | 260 $^\circ\text{C}$ for 5 second | | | | |

Notes:

- Derate linearly as shown in Figure 4.
- Any pulsed operation cannot exceed the Absolute Max Peak Forward current as specified in Figure 5.
- Drive currents between 10 mA and 30 mA are recommended for best long term performance.
- Operation at currents below 10 mA is not recommended, please contact your Agilent sales representative.

Optical Characteristics at $T_A = 25^\circ\text{C}$

| Part Number HLMA- | Luminous Intensity I_V (mcd) @ 20 mA ^[1] | | Peak Wavelength λ_{peak} (nm) Typ. | Color, Dominant Wavelength λ_d ^[2] (nm) Typ. | Viewing Angle $2\theta^{1/2}$ Degrees ^[3] Typ. | Luminous Efficacy η_V (lm/w) |
|----------------------|---|------|---|--|--|---|
| | Min. | Typ. | | | | |
| DL05 | 35 | 100 | 594 | 592 | 65 | 480 |
| DH05 | 35 | 100 | 621 | 615 | 65 | 263 |
| KL05 | 35 | 100 | 594 | 592 | 60 | 480 |
| KH05 | 35 | 100 | 621 | 615 | 60 | 263 |

Notes:

- ϕ_V is the total luminous flux output as measured with an integrating sphere.
- The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the device.
- $\theta^{1/2}$ is the off-axis angle where the luminous intensity is 1/2 the peak intensity.

Electrical Characteristics at $T_A = 25^\circ\text{C}$

| Part Number HLMA- | Forward Voltage V_F (Volts) @ $I_F = 20$ mA | | Reverse Breakdown V_R (Volts) @ $I_R = 100$ μA | | Capacitance C (pF) $V_F = 0$, $f = 1$ MHz Typ. | Thermal Resistance $R_{\theta_{J-PIN}}$ ($^\circ\text{C}/\text{W}$) | Speed of Response τ_s (ns) Time Constant e^{-t/τ_s} Typ. |
|----------------------|---|------|---|------|---|--|--|
| | Typ. | Max. | Min. | Typ. | | | |
| DL05 | 1.9 | 2.4 | 5 | 25 | 60 | 260 | 13 |
| DH05 | 1.9 | 2.4 | 5 | 25 | 60 | 260 | 13 |
| KL05 | 1.9 | 2.4 | 5 | 25 | 60 | 290 | 13 |
| KH05 | 1.9 | 2.4 | 5 | 25 | 60 | 290 | 13 |

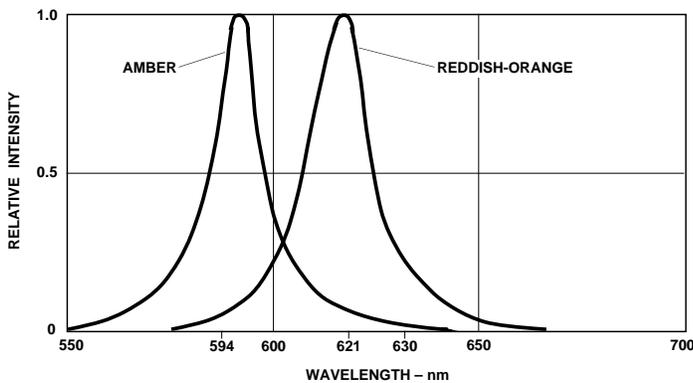


Figure 1. Relative Intensity vs. Wavelength.

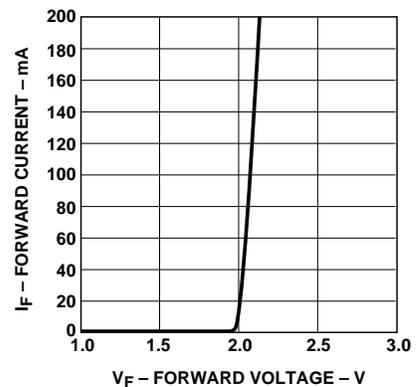


Figure 2. Forward Current vs. Forward Voltage.

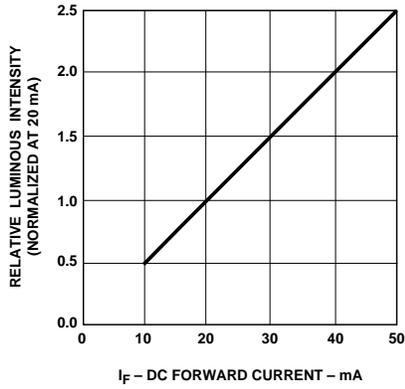


Figure 3. Relative Luminous Intensity vs. Forward Current.

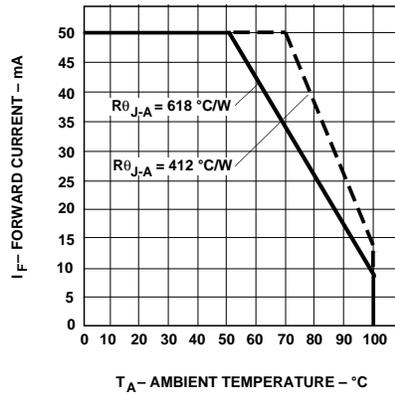


Figure 4. Maximum Forward Current vs. Ambient Temperature. Derating Based on T_J Max = 110°C.

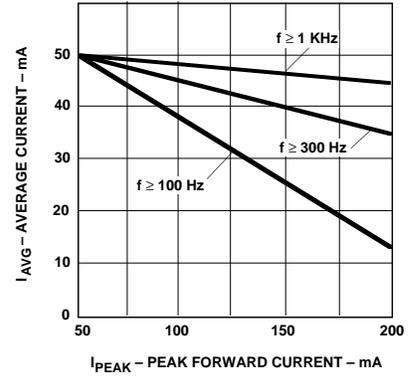


Figure 5. Maximum Average Current vs. Peak Forward Current.

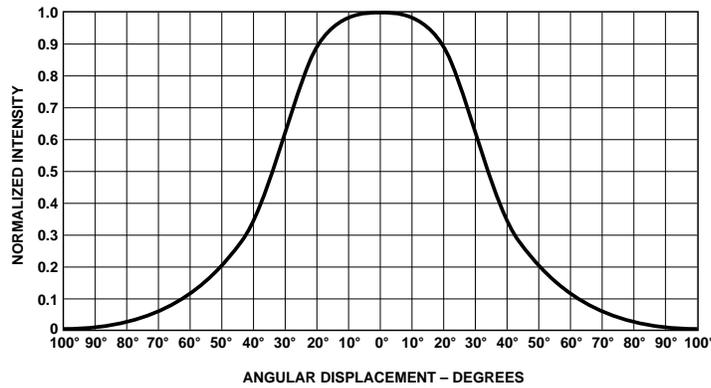


Figure 6. Spatial Radiation Pattern for HLMA-DL05/DH05 65° Lamps.

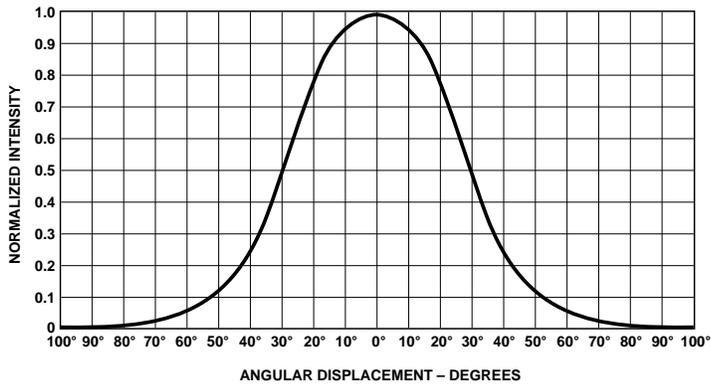


Figure 7. Spatial Radiation Pattern for HLMA-KL05/KH05 60° Lamps.

HLMP-D115/D120/J100/J150 TS AlGaAs Red Lamps

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

| Parameter | HLMP-D115 | HLMP-D120 | HLMP-J100 | HLMP-J150 | Units |
|---|-----------------------------------|-------------|-------------|-------------|------------------|
| DC Forward Current ^[1] | 50 | 50 | 50 | 50 | mA |
| Peak Forward Current ^[2] | 300 | 300 | 300 | 300 | mA |
| Average Input Power ^[2] | 100 | 100 | 100 | 100 | mW |
| Reverse Voltage ($I_R = 100 \mu\text{A}$) | 5 | 5 | 5 | 5 | V |
| Operating Temperature Range | -55 to +100 | -55 to +100 | -55 to +100 | -55 to +100 | $^\circ\text{C}$ |
| Storage Temperature Range | -55 to +100 | -55 to +100 | -55 to +100 | -55 to +100 | $^\circ\text{C}$ |
| Junction Temperature | 110 | | | | $^\circ\text{C}$ |
| Soldering Temperature [1.59 mm (0.06 in.) below seating plane] | 260 $^\circ\text{C}$ for 5 second | | | | |

Notes:

- Derate linearly as shown in Figure 12.
- Any pulsed operation cannot exceed the Absolute Max Peak Forward current as specified in Figure 13.

Optical Characteristics at $T_A = 25^\circ\text{C}$

| Part Number HLMP- | Luminous Intensity I_V (mcd) @ 20 mA ^[1] | | Peak Wavelength λ_{peak} (nm) Typ. | Color, Dominant Wavelength λ_d ^[2] (nm) Typ. | Viewing Angle $2 \theta_{1/2}$ Degrees ^[3] Typ. | Luminous Efficacy η_V (lm/w) |
|----------------------|---|------|---|---|---|---|
| | Min. | Typ. | | | | |
| D115 | 138 | 250 | 654 | 644 | 40 | 85 |
| D120 | 138 | 350 | 654 | 644 | 25 | 85 |
| J100 | 39 | 175 | 654 | 644 | 55 | 85 |
| J150 | 1.3 | 3.0 | 654 | 644 | 55 | 85 |

Notes:

- ϕ_V is the total luminous flux output as measured with an integrating sphere.
- The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the device.
- $\theta_{1/2}$ is the off-axis angle where the luminous intensity is 1/2 the peak intensity.

Electrical Characteristics at $T_A = 25^\circ\text{C}$

| Part Number HLMP- | Forward Voltage V_F (Volts) @ $I_F = 20 \text{ mA}$ | | Reverse Breakdown V_R (Volts) @ $I_R = 100 \mu\text{A}$ | | Capacitance C (pF) $V_F = 0$ $f = 1 \text{ MHz}$ Typ. | Thermal Resistance $R_{\theta_{J-PIN}}$ ($^\circ\text{C}/\text{W}$) | Speed of Response τ_s (ns) Time Constant e^{-t/τ_s} Typ. |
|----------------------|---|------|---|------|---|--|--|
| | Min. | Typ. | Min. | Typ. | | | |
| D115 | 1.85 | 2.4 | 5 | 20 | 20 | 260 | 45 |
| D120 | 1.85 | 2.4 | 5 | 20 | 20 | 260 | 45 |
| J100 | 1.85 | 2.4 | 5 | 20 | 20 | 290 | 45 |
| J150 | 1.6 | 1.9 | 5 | 20 | 20 | 290 | 45 |

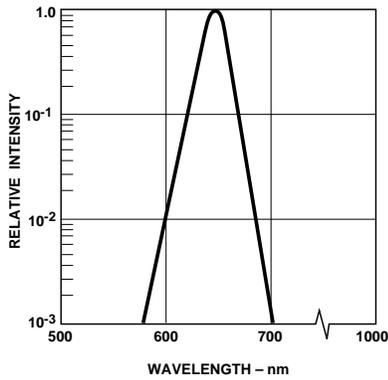


Figure 8. Relative Intensity vs. Wavelength.

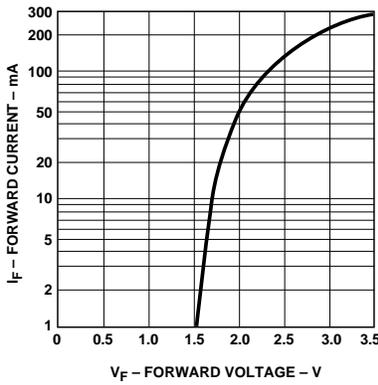


Figure 9. Forward Current vs. Forward Voltage.

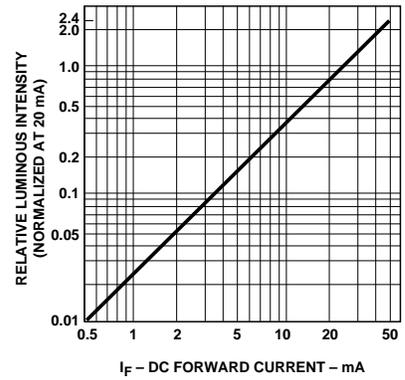


Figure 10. Relative Luminous Intensity vs. DC Forward Current.

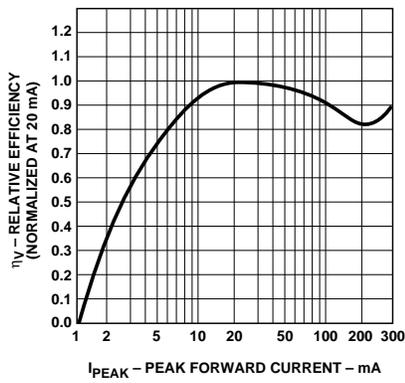


Figure 11. Relative Efficiency vs. Peak Forward Current.

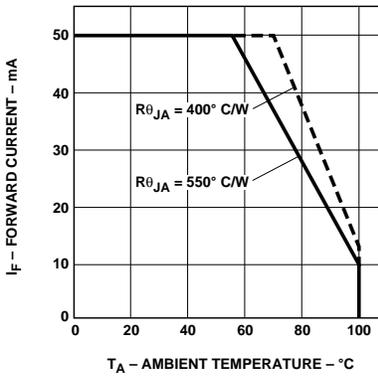


Figure 12. Maximum Forward Current vs. Ambient Temperature. Derating Based on T_J Max = 110°C.

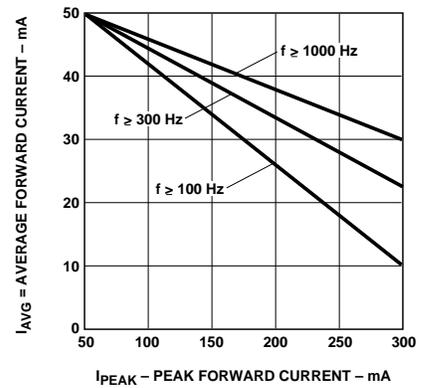


Figure 13. Maximum Average Current vs. Peak Forward Current.

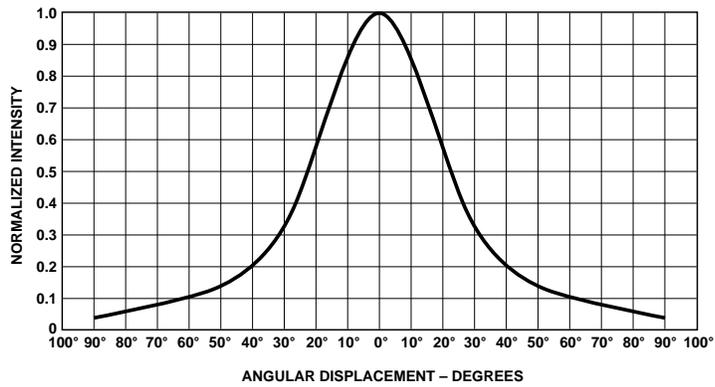


Figure 14. Spatial Radiation Pattern for 40° HLMP-D115 Lamp.

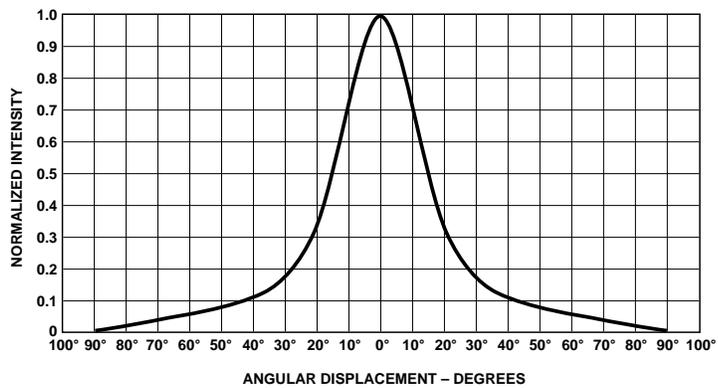


Figure 15. Spatial Radiation Pattern for 25° HLMP-D120 Lamp.


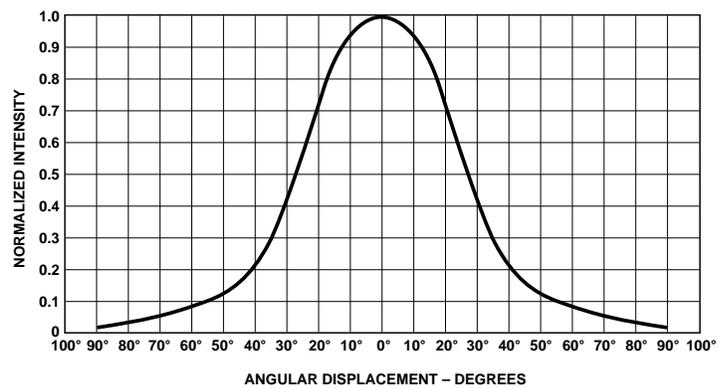


Figure 16. Spatial Radiation Pattern for 55° HLMP-J100-J150 Lamps.



Agilent Technologies
Innovating the HP Way

www.semiconductor.agilent.com

Data subject to change.

Copyright © 1999 Agilent Technologies, Inc.

Obsoletes 5962-7982E

5964-9287E (11/99)