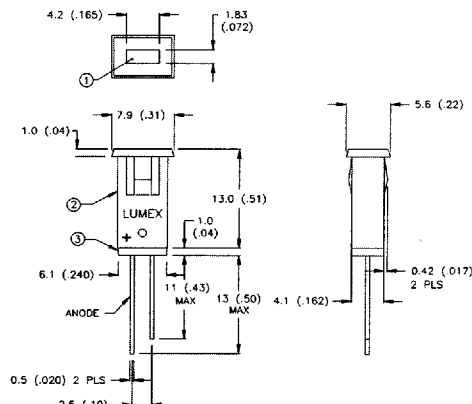

SSI-LXHMP059XX SERIES 2x5 PANEL INDICATOR ASSEMBLY

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Easy Installation • High Contrast Holder • Four Color Options • Bi-Color Blinking Option	• Front Panel Indicator • Status Annunciator • Go-No Go Condition Indicators	• Holder: Black Nylon • Termination: 0.5mm □ Leads • Installation: P.C. Mount/Solder • 4.5 x 6.3mm Cut-Out

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
		PEAK(nm)			TYP (mCD) @	mA	
SSI-LXHMP059ID	RED	635	10-25	2.1	8	20	SSL-LX2573XX
SSI-LXHMP059SRD	RED	660	10-25	1.7	25	20	SSL-LX2573XX
SSI-LXHMP059GD	GREEN	565	10-25	2.1	8	20	SSL-LX2573XX
SSI-LXHMP059YD	YELLOW	585	10-25	2.1	8	20	SSL-LX2573XX
BI-COLOR OPTION							
SSI-LXHMP059HGW	RED-GREEN	695/565	10-25	2.1	6/6	20	SSL-LX2573HGW
BLINKING OPTION							
SSI-LXHMP059BID	RED	635	10-20	3-15V	8	9V	SSL-LX2573BID

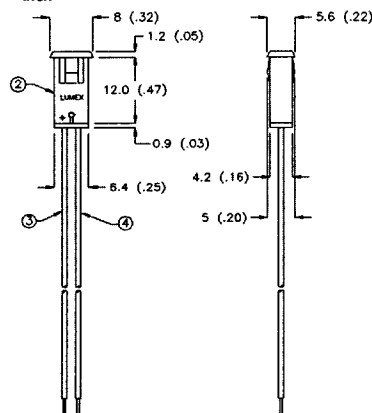
See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSI-LXHMP059XX-150 SERIES 2x5 PANEL INDICATOR ASSEMBLY

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Easy Installation • High Contrast Holder • Four Color Options • Bi-Color Blinking Option	• Front Panel Indicator • Status Annunciator • Go-No Go Condition Indicators	• Holder: Black Nylon • Termination: • (6") 24AWG Insulated Leads • Installation: Panel Mount • 4.5 x 6.3mm Cut-Out

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
		PEAK(nm)			TYP (mCD) @	mA	
SSI-LXHMP059ID-150	RED	635	10-25	2.1	8	20	SSL-LX2573XX
SSI-LXHMP059SRD-150	RED	660	10-25	1.7	25	20	SSL-LX2573XX
SSI-LXHMP059GD-150	GREEN	565	10-25	2.1	8	20	SSL-LX2573XX
SSI-LXHMP059YD-150	YELLOW	585	10-25	2.1	8	20	SSL-LX2573XX
BI-COLOR OPTION							
SSI-LXHMP059HGW-150	RED-GREEN	695/565	10-25	2.1	6/6	20	SSL-LX2573HGW
BLINKING OPTION							
SSI-LXHMP059BID-150	RED	635	10-20	3-15V	8	9V	SSL-LX2573BID

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSL-LX2581XX SERIES 2x5mm RECTANGULAR LEDS

FEATURES	APPLICATIONS	OPTIONS AVAILABLE
• Four Color Options • Low Cost Package • Long Life/Low Power	• Panel Indicators • Status Illuminators • Array Assemblies	• Add-on Spacers • Array Assembly Holders

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS TYP.(mcd.)	VIEW IF(mA)	VIEW ANGLE	VI@20mA	
		PEAK(nm)					TYP.	MAX
SSL-LX2581ID	RED	635	RED DIFF.	6	20	80	2.0	2.8
SSL-LX2581SRD	RED	660	RED DIFF.	24	20	80	1.7	2.2
SSL-LX2581GD	GREEN	565	GREEN DIFF.	6	20	80	2.1	2.8
SSL-LX2581YD	YELLOW	585	YELLOW DIFF.	6	20	80	2.1	2.8

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm
