

isc Silicon NPN Power Transistor

BU607D

DESCRIPTION



- High Voltage: $V_{CEV}=330V(\text{Min})$
- Fast Switching Speed-
: $t_f=0.75\mu s(\text{Max})$
- Low Saturation Voltage-
: $V_{CE(sat)}=1.0V(\text{Max})@I_C=5A$

APPLICATIONS

- Designed for use in horizontal deflection output stages of TV's and CRT's

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	330	V
V_{CEV}	Collector-Emitter Voltage	330	V
V_{CEO}	Collector-Emitter Voltage	150	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current-Continuous	7	A
I_{CM}	Collector Current-Peak	10	A
I_B	Base Current	4	A
P_C	Collector Power Dissipation @ $T_C=25^{\circ}C$	90	W
T_J	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature Range	-65~150	$^{\circ}C$

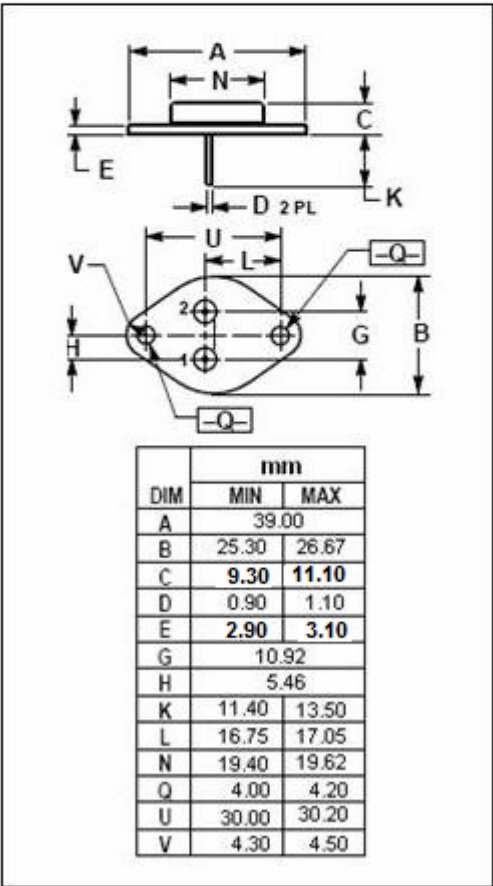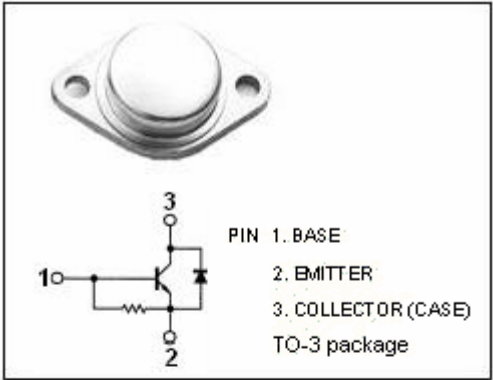

isc Silicon NPN Power Transistor**BU607D****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEQ(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=100\text{mA}; I_B=0$	150			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=5\text{A}; I_B=0.65\text{A}$			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=5\text{A}; I_B=0.65\text{A}$			1.3	V
h_{FE}	DC Current Gain	$I_C=2\text{A}; V_{CE}=5\text{V};$		15		
I_{CEV}	Collector Cutoff Current	$V_{CE}=330\text{V}; V_{BE}=-1.5\text{V}$			15	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=6\text{V}; I_C=0$			400	mA
f_T	Current-Gain—Bandwidth Product	$I_C=0.5\text{A}; V_{CE}=10\text{V}, f_{test}=1\text{MHz}$	10			MHz
V_{ECF}	C-E Diode Forward Voltage	$I_F=5\text{A}$			1.5	V
t_f	Fall Time	$I_C=5\text{A}; I_{B1}=-I_{B2}=0.65\text{A}, V_{CC}=40\text{V}$			0.75	μs