

FGT303

March, 2006


■Features

- Generation 3 IGBT (Trench Technology)
- Low $V_{CE(sat)}$: 1.3V typ
- Large Collector Current: $I_{cp}=160A$


■Applications

- PDP driver

■Equivalent circuit



■Package—TO220F

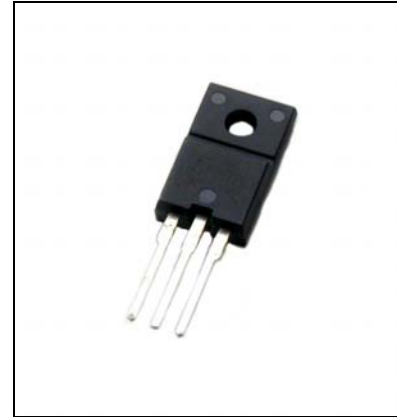

Absolute maximum ratings

(Ta=25°C)

Parameter	Symbol	Ratings	Unit
Collector to Emitter Voltage	V_{CES}	300	V
Gate to Emitter Voltage	V_{GE}	± 20	V
Continuous Collector Current	$I_{C(DC)}$	30	A
Pulsed Collector Current	I_C (pulse)* ¹	160	A
Maximum Allowable Power Dissipation	PC	35 (Tc=25°C)	W
Operating Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-55 to 150	°C

*1. $PW \leq 10\mu\text{sec}$, duty cycle $\leq 1\%$


Electrical characteristics

(Ta=25°C)


Parameter	Symbol	Test Conditions	Limits			Unit
			MIN	TYP	MAX	
Collector to Emitter Breakdown Voltage	V(BR)CES	IC= 100μA, VGE=0V	300			V
Gate to Emitter Leakage Current	IGES	VGE= ±20V			±100	nA
Collector to Emitter Leakage Current	ICES	VCE= 300V, VGE=0V			100	μA
Gate Threshold Voltage	VGE(th)	VCE= 10V, ID=1mA	3		6	V
Collector to Emitter Saturation Voltage	VCE(sat)	VGE=15V, IC= 30A		1.3	1.7	V
Collector to Emitter Saturation Voltage	VCE(sat)	VGE=15V, IC= 60A		1.65		V
Input Capacitance	Cies	VCE=20V f=1.0MHz VGE=0V		4600		pF
Output Capacitance	Coes			130		
Reverse Transfer Capacitance	Cres			95		
Turn-On Delay Time	td(on)	IC=60A VCE≈250V RL=4.17Ω VGE=15V RG=10Ω		30		ns
Rise Time	tr			90		
Turn-Off Delay Time	td(off)			110		
Fall Time	tf			175		

Typical performance characteristics


Typical Output Characteristics

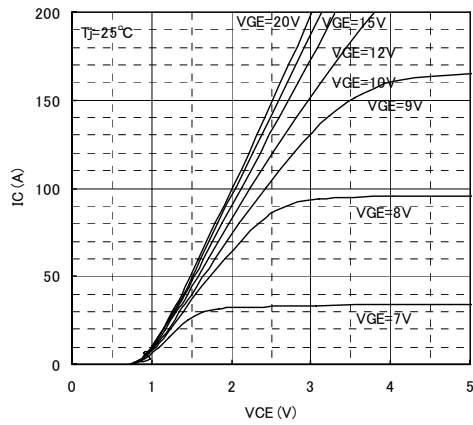


Typical Output Characteristics

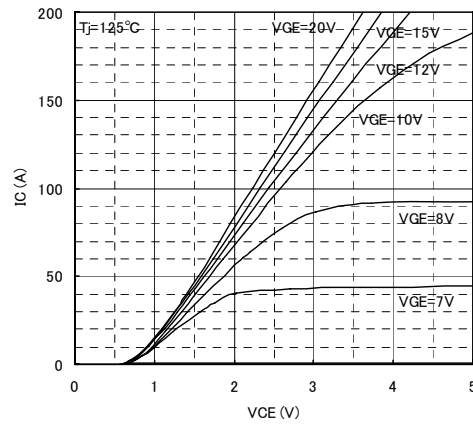


Typical VCE vs. VGE

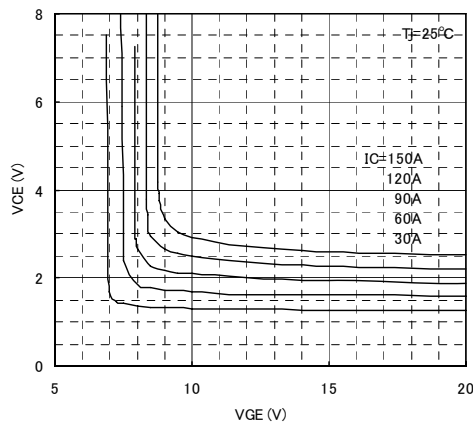


Typical VCE vs. VGE

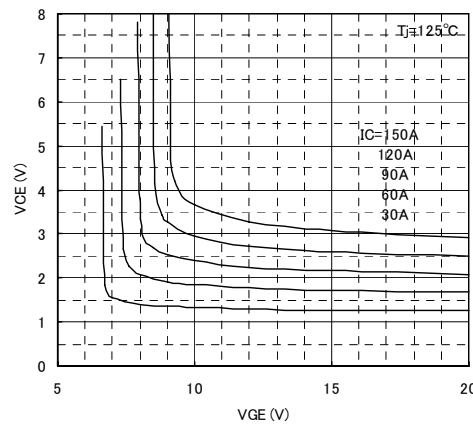

Typical VCE vs. IC

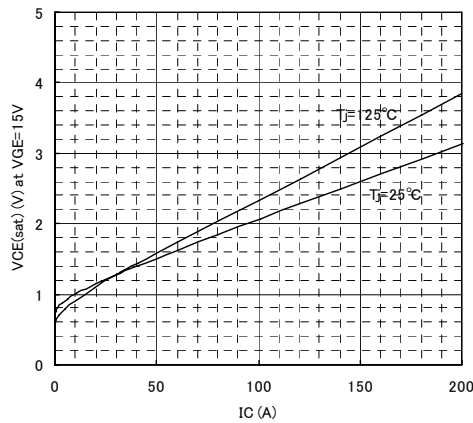


Typical Vth vs. Junction Temperature

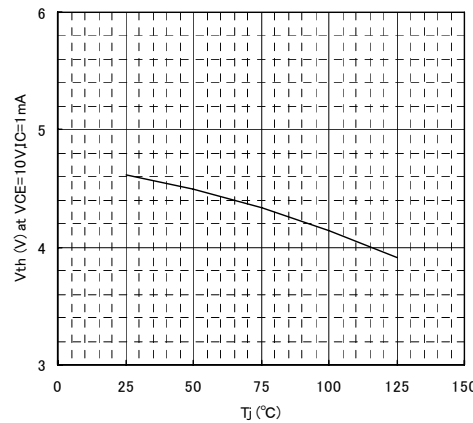


Typical performance characteristics


Typical Switching Times vs. IC

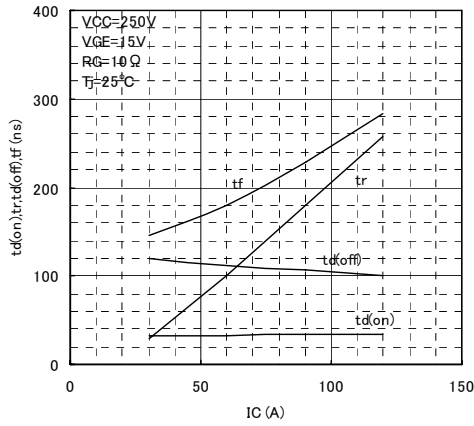


Typical Switching Time vs. IC

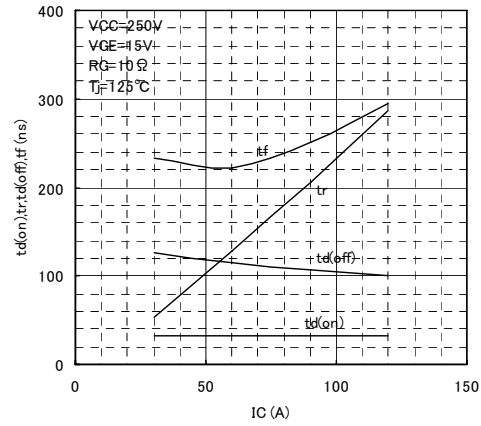


Typical Capacitance - VCE

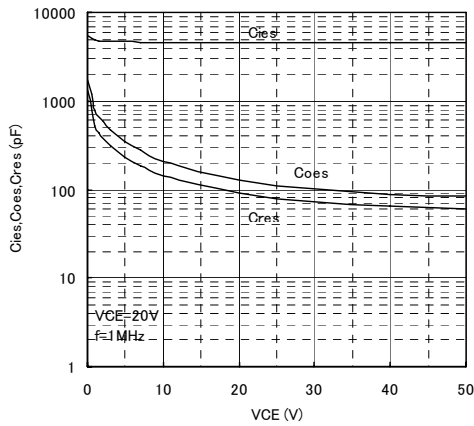

Typical Gate Charge vs. VGE

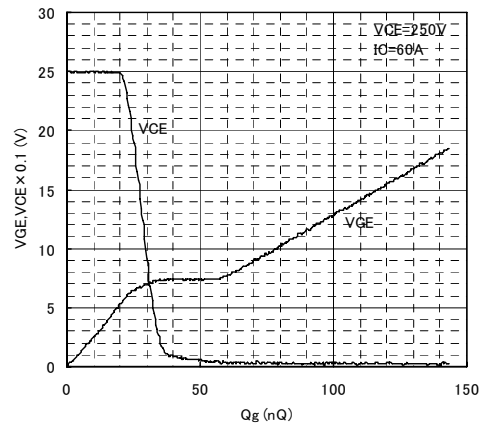

Thermal Impedance vs. Pulse Width

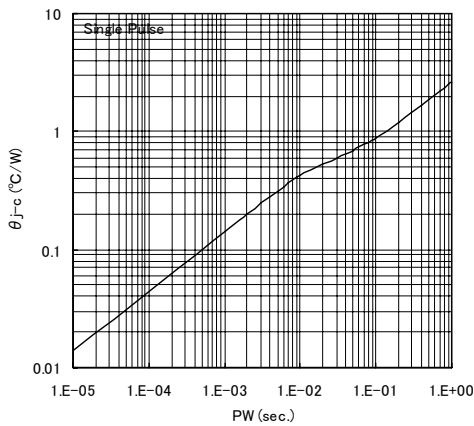

Power Dissipation vs. Case Temperature



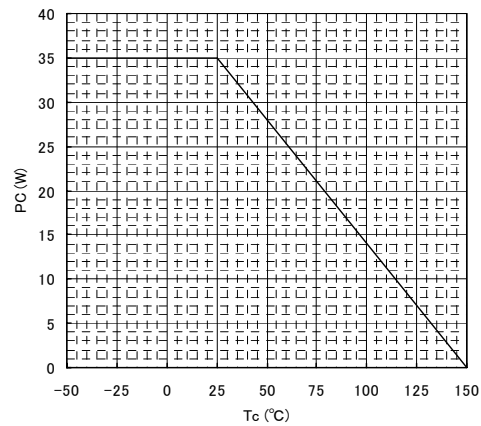


Fig.1 Switching Time Test Method

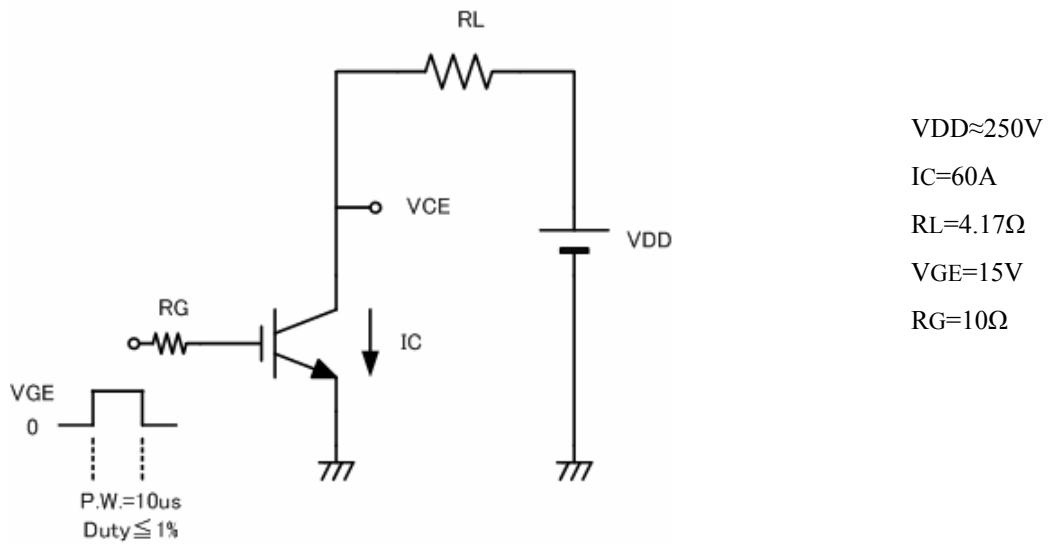


(a) Test Circuit

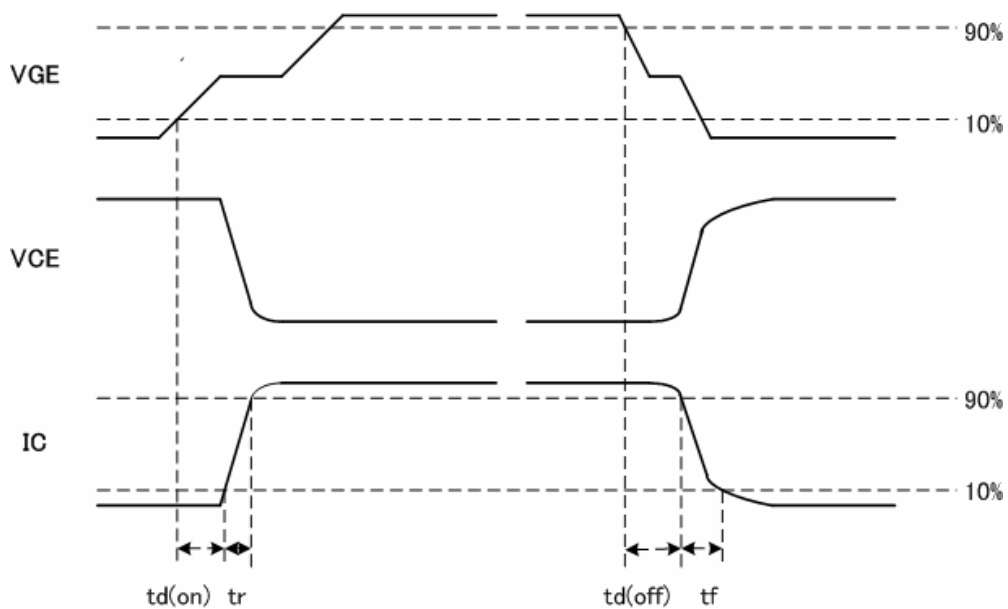

(b) Output waveforms

External dimensions

FM20 (TO220 Full Mold)

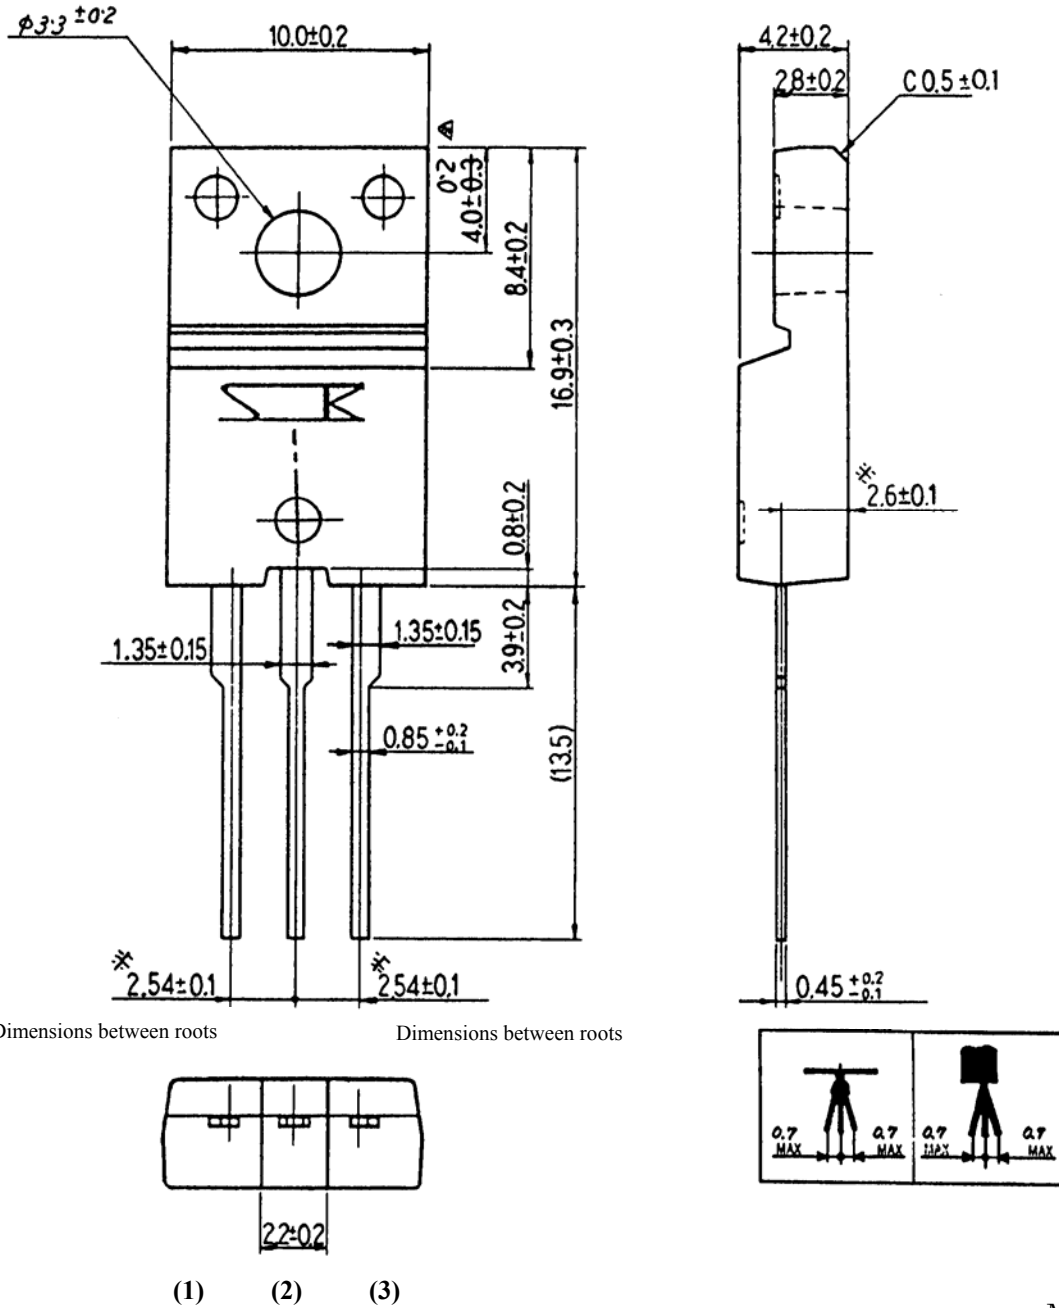

Mass: Approx.2g

<Worldwide Contacts>**Asia Pacific****China****Sanken Electric Hong Kong Co., Ltd.**

Suite 1026 Ocean Centre, Canton Road, Tsimshatsui, Kowloon, Hong Kong

Tel: 852-2735-5262

Fax: 852-2735-5494

Sanken Electric (Shanghai) Co., Ltd.

Room3202, Maxdo Centre, Xingyi Road 8, Changning district, Shanghai, China

Tel: 86-21-5208-1177

Fax: 86-21-5208-1757

Taiwan Sanken Electric Co., Ltd.

Room 1801, 18th Floor, 88 Jung Shiau East Road, Sec. 2, Taipei 100, Taiwan R.O.C.

Tel: 886-2-2356-8161

Fax: 886-2-2356-8261

India**Saket Devices Pvt. Ltd.**

Office No.13, First Floor, Bandal - Dhankude Plaza, Near PMT Depot, Paud Road, Kothrud, Pune - 411 038, India

Tel: 91-20-5621-2340

91-20-2528-5449

Fax: 91-20-2528-5459

Japan**Sanken Electric Co., Ltd. Overseas Sales Headquarters**

Metropolitan Plaza Bldg. 1-11-1 Nishi-Ikebukuro, Toshima-ku, Tokyo 171-0021, Japan

Tel: 81-3-3986-6164

Fax: 81-3-3986-8637

Korea**Sanken Electric Korea Co., Ltd.**

Mirae Asset Life Bldg. 6F, 168 Kongduk-dong, Mapo-ku, Seoul, 121-705, Korea

Tel: 82-2-714-3700

Fax: 82-2-3272-2145

Singapore**Sanken Electric Singapore Pte. Ltd.**

150 Beach Road, #14-03 The Gateway West, Singapore 189720

Tel: 65-6291-4755

Fax: 65-6297-1744

Europe

United Kingdom

Sanken Power Systems (UK) Limited

Pencoed Technology Park, Pencoed, Bridgend CF35 5HY. UK

Tel: 44-1656-869-100

Fax: 44-1656-869-162

North America

United States

Allegro MicroSystems, Inc.

115 Northeast Cutoff, Worcester, Massachusetts 01606, U.S.A.

Tel: 1-508-853-5000

Fax: 1-508-853-3353

Allegro MicroSystems, Inc. (Southern California)

14 Hughes Street, Suite B105, Irvine, CA 92618

Tel: 1-949-460-2003

Fax: 1-949-460-7837

CAUTION / WARNING

- The information in this publication has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies.

- Sanken reserves the right to make changes without further notice to any products herein in the interest of improvements in the performance, reliability, or manufacturability of its products.

Before placing an order, Sanken advises its customers to obtain the latest version of the relevant information to verify that the information being relied upon is current.

- Application and operation examples described in this catalog are quoted for the sole purpose of reference for the use of the products herein and Sanken can assume no responsibility for any infringement of industrial property rights, intellectual property rights or any other rights of Sanken or any third party which may result from its use.

- When using the products herein, the applicability and suitability of such products for the intended purpose or object shall be reviewed at the users' responsibility.

- Although Sanken undertakes to enhance the quality and reliability of its products, the occurrence of failure and defect of semiconductor products at a certain rate is inevitable. Users of Sanken products are requested to take, at their own risk, preventative measures including safety design of the equipment or systems against any possible injury, death, fires or damages to the society due to device failure or malfunction.

- Sanken products listed in this catalog are designed and intended for the use as components in general purpose electronic equipment or apparatus (home appliances, office equipment, telecommunication equipment, measuring equipment, etc.). Before placing an order, the user's written consent to the specifications is requested.

When considering the use of Sanken products in the applications where higher reliability is required (transportation equipment and its control systems, traffic signal control systems or equipment, fire/crime alarm systems, various safety devices, etc.), please contact your nearest Sanken sales representative to discuss and obtain written confirmation of your specifications. The use of Sanken products without the written consent of Sanken in the applications where extremely high reliability is required (aerospace equipment, nuclear power control systems, life support systems, etc.) is strictly prohibited.

- Anti radioactive ray design is not considered for the products listed herein.

- This publication shall not be reproduced in whole or in part without prior written approval from Sanken.

- This is notification that you, as purchaser of the products/technology, are not allowed to perform any of the following:

1. Resell or retransfer these products/technology to any party intending to disturb international peace and security.
2. Use these products/technology yourself for activities disturbing international peace and security.
3. Allow any other party to use these products/technology for activities disturbing international peace and security.

Also, as purchaser of these products/technology, you agree to follow the procedures for the export or transfer of these products/technology, under the Foreign Exchange and Foreign Trade Law, when you export or transfer the products/technology abroad.