


- GLASS PASSIVATED CHIP
- I_{GT} SPECIFIED IN FOUR QUADRANTS
- INSULATING VOLTAGE 2500 V_{RMS}
- UL RECOGNIZED (E81734)

DESCRIPTION

This new design of plastic insulated power triacs offers maximum efficiency with maximum ease of mounting.

ADVANTAGES

- NO TAPPING REQUIRED FOR FIXING
- EXCELLENT THERMAL IMPEDANCE AND HIGH RELIABILITY CONSTRUCTION

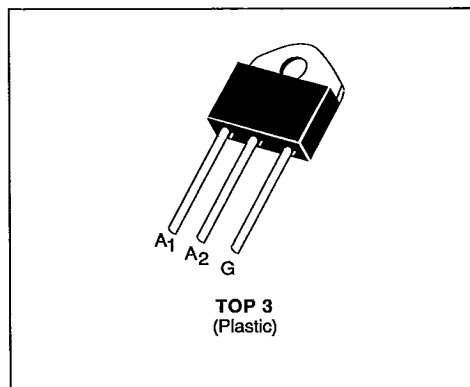**ABSOLUTE RATINGS** (limiting values)

Symbol	Parameter		Value	Unit
$I_{T(RMS)}$	RMS on-state Current (360° conduction angle)	$T_C = 75\text{ °C}$	40	A
I_{TSM}	Non Repetitive Surge Peak on-state Current (T_J initial = 25 °C - Half sine wave)	$t = 8.3\text{ ms}$	315	A
		$t = 10\text{ ms}$	300	
I^2t	I^2t Value for Fusing	$t = 10\text{ ms}$	450	A ² s
di/dt	Critical Rate of Rise of on-state Current (1)	Repetitive $F = 50\text{ Hz}$	10	A/ μ s
		Non Repetitive	50	
T_{stg} T_J	Storage and Operating Junction Temperature Range		- 40 to +125 - 40 to 125	°C °C

Symbol	Parameter	BTA 41-					Unit
		200B	400B	600B	700B	800B	
V_{DRM}	Repetitive Peak off-state Voltage (2)	200	400	600	700	800	V

(1) $I_G = 1\text{ A}$ $di/dt = 1\text{ A}/\mu\text{s}$
 (2) $T_J = 125\text{ °C}$.

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction to Ambient	50	°C/W
$R_{th(c-h)}$	Contact (case-heatsink) with Grease	0.2	°C/W
$R_{th(j-c)}\text{ DC}$	Junction to Case for DC	1.2	°C/W
$R_{th(j-c)}\text{ AC}$	Junction to Case for 360 ° Conduction Angle ($F = 50\text{ Hz}$)	0.9	°C/W

February 1989

1/4

303

GATE CHARACTERISTICS (maximum values)

$$P_{GM} = 40 \text{ W } (t_p = 10 \mu s)$$
$$I_{GM} = 10 \text{ A } (t_p = 10 \mu s)$$

T-25-17

$$P_{G(AV)} = 1 \text{ W}$$
 $V_{GM} = 16 \text{ V } (t_p = 10 \mu s)$


ELECTRICAL CHARACTERISTICS

Symbol	Test Conditions			Quadrants	Min.	Typ.	Max.	Unit
I_{GT}	$T_J = 25^\circ\text{C}$ Pulse Duration $> 20\ \mu\text{s}$	$V_D = 12\ \text{V}$	$R_L = 33\ \Omega$	I-II-III	1		50	mA
				IV	1		100	
V_{GT}	$T_J = 25^\circ\text{C}$ Pulse Duration $> 20\ \mu\text{s}$	$V_D = 12\ \text{V}$	$R_L = 33\ \Omega$	I-II-III-IV			1.5	V
V_{GD}	$T_J = 125^\circ\text{C}$	$V_D = V_{DRM}$	$R_L = 3.3\ \text{k}\Omega$	I-II-III-IV	0.2			V
I_H^*	$T_J = 25^\circ\text{C}$	$I_T = 500\ \text{mA}$	Gate Open			30	80	mA
I_L	$T_J = 25^\circ\text{C}$ Pulse Duration $> 20\ \mu\text{s}$	$V_D = 12\ \text{V}$	$I_G = 200\ \text{mA}$	I-II-III-IV			100	mA
V_{TM}^*	$T_J = 25^\circ\text{C}$	$I_{TM} = 60\ \text{A}$	$t_p = 10\ \text{ms}$				1.8	V
I_{DRM}^*	$T_J = 125^\circ\text{C}$	V_{DRM} Specified				1.5	6	mA
dv/dt^*	$T_J = 125^\circ\text{C}$ Linear Slope up to $V_D = 67\% V_{DRM}$	Gate Open			250			V/ μs
$(dv/dt)_c^*$	$T_C = 75^\circ\text{C}$ $(di/dt)_c = 18\ \text{A/ms}$	$V_D = V_{DRM}$	$I_T = 60\ \text{A}$		5			V/ μs
t_{gt}	$T_J = 25^\circ\text{C}$ $I_G = 1\ \text{A}$	$V_D = V_{DRM}$ $di_G/dt = 10\ \text{A}/\mu\text{s}$	$I_T = 60\ \text{A}$	I-II-III-IV		2.5		μs

* For either polarity of electrode A₂ voltage with reference to electrode A₁.

PACKAGE MECHANICAL DATA

TOP 3 Plastic

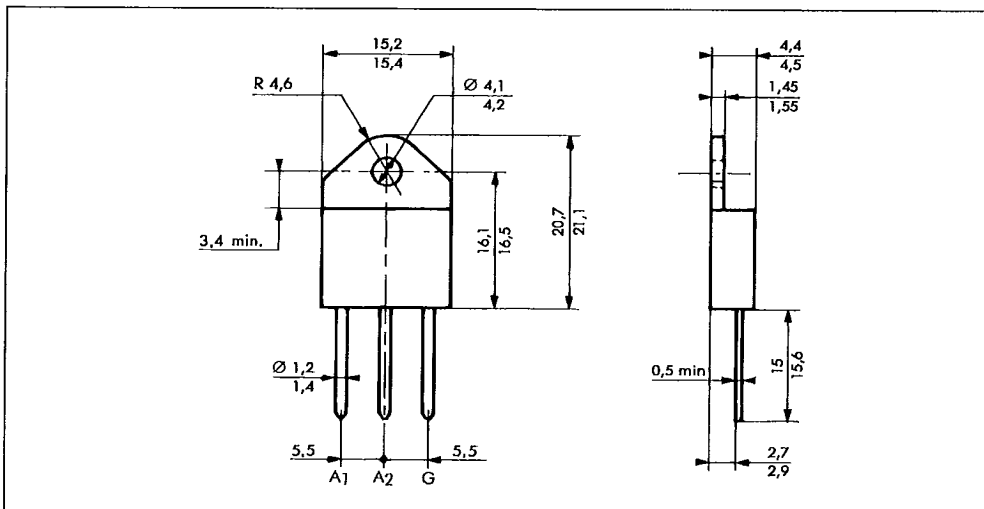

Cooling method : by conduction (method C)

Marking : type number

Weight : 5 g

S G S-THOMSON

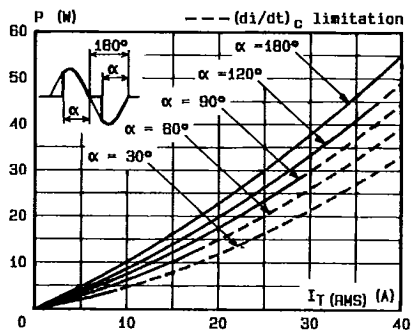


Fig.1 - Maximum mean power dissipation versus RMS on-state current ($F = 60$ Hz).

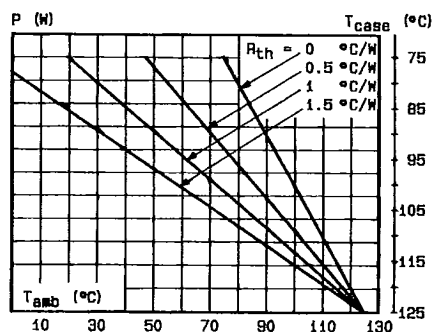


Fig.2 - Correlation between maximum mean power dissipation and maximum allowable temperatures (T_{amb} and T_{case}) for different thermal resistances heatsink + contact.

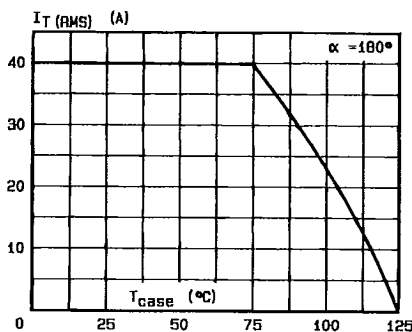


Fig.3 - RMS on-state current versus case temperature.

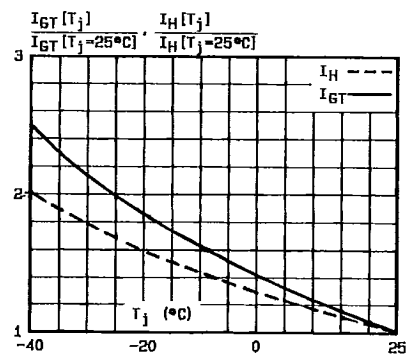


Fig.5 - Relative variation of gate trigger current and holding current versus junction temperature.

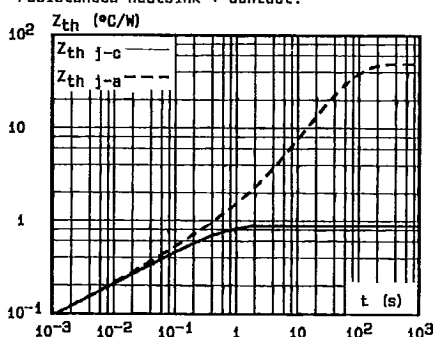


Fig.4 - Thermal transient impedance junction to case and junction to ambient versus pulse duration.

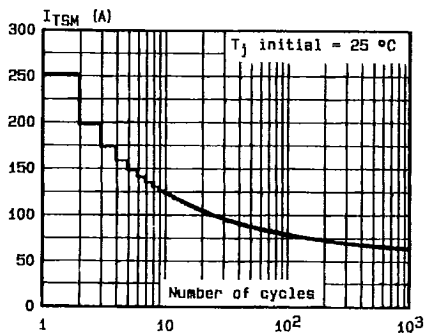


Fig.6 - Non repetitive surge peak on-state current versus number of cycles.

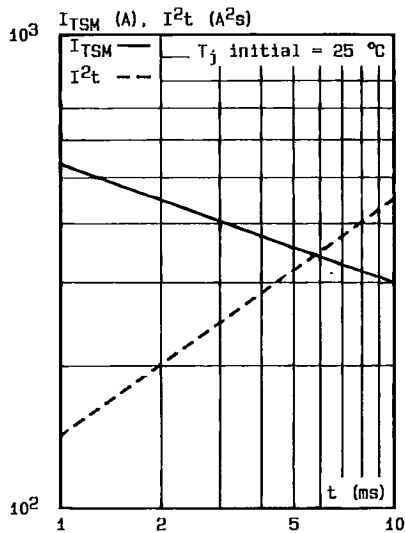


Fig. 7 - Non repetitive surge peak on-state current for a sinusoidal pulse with width : $t \leq 10$ ms, and corresponding value of I^2t .

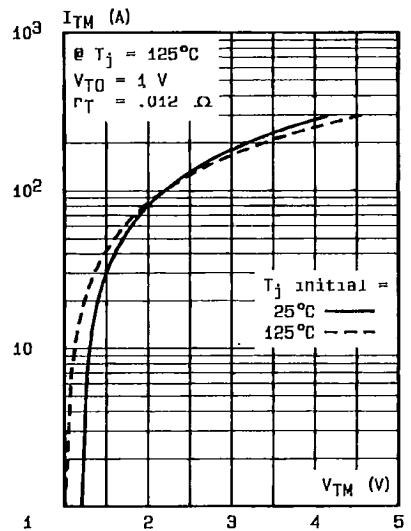


Fig. 8 - On-state characteristics (maximum values).