


RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free

SOD-123

● FEATURES

- Fast switching speed
- Ultra-Small surface mount package
- For general purpose switching applications
- High conductance
- Also available in lead free version

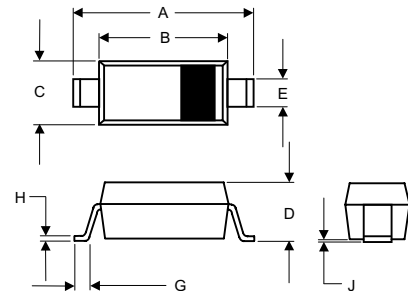

● MECHANICAL DATA

- Case: SOD-123, Plastic
- Epoxy: UL 94V-0 rate flame retardant
- Metallurgically bonded construction
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.004 grams

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	3.55	3.85	0.140	0.152
B	2.55	2.85	0.100	0.112
C	1.40	1.80	0.550	0.071
D	-----	1.35	-----	0.053
E	0.30	0.78	0.120	0.031
G	0.15	-----	0.006	-----
H	-----	0.25	-----	0.001
J	-----	0.15	-----	0.006

Marking: T4, 5D

● MAXIMUM RATINGS

Rating 25°C ambient temperature unless otherwise specified.
 Single phase half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	VALUE	UNITS
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Peak Repetitive Reverse Voltage	V_{RRM}	75	V
Working Peak Reverse Voltage	V_{RWM}		
DC Blocking Voltage	V_R	53	V
RMS Reverse Voltage	$V_{R(RMS)}$		
Forward Continuous Current	I_{FM}	300	mA
Average Rectified Output Current	I_O	150	mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0 μ s @ t = 1.0 s	I_{FSM}	2.0	A
		1.0	
Power Dissipation (Note 1)	P_D	200	mW
Thermal Resistance Junction to Ambient Air (Note 1)	$R_{\theta JA}$	625	°C / W
Operating and Storage Temperature Range	T_J, T_{STG}	- 65 ~ + 150	°C

● ELECTRICAL CHARACTERISTICS (Ta=25°C)

TYPE NUMBER	SYMBOL	Min.	Max.	UNITS	Test Condition
Reverse Breakdown Voltage	V_{RM}	75	-	V	$I_R = 1.0\mu A$
Forward Voltage (Note 2)	V_{FM}	-	0.715 0.855 1.0 1.25	V	$I_F = 1.0mA$ $I_F = 10mA$ $I_F = 50mA$ $I_F = 150mA$
Peak Reverse Current (Note 2)	I_{RM}	-	1.0 50 30 25	μA μA μA nA	$V_R = 75V$ $V_R = 75V, T_J = 150^\circ C$ $V_R = 25V, T_J = 150^\circ C$ $V_R = 20V$
Total Capacitance	C_T	-	2.0	pF	$V_R = 0, f = 1.0MHz$
Reverse Recovery Time	t_{rr}	-	4.0	ns	$I_F = I_R = 10mA,$ $I_{tr} = 0.1 \times I_R, R_L = 100\Omega$

NOTES:

1. Part mounted on FR-4 PC board with recommended pad layout,
2. Short duration test pulse used to minimize self-heating effect.

● RATING AND CHARACTERISTIC CURVES

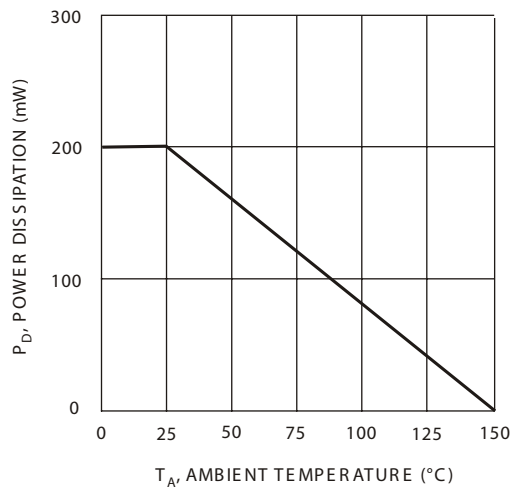


Fig. 1 Power Derating Curve

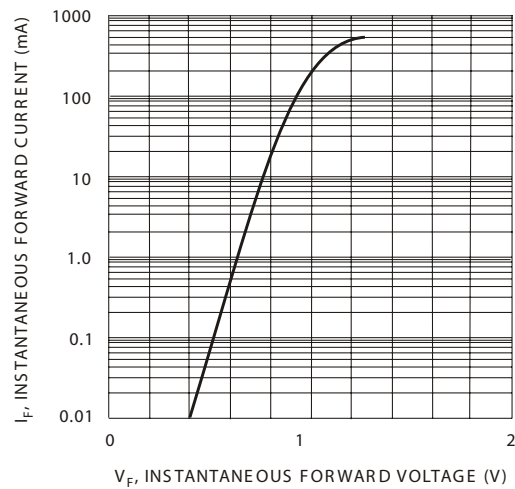


Fig. 2 Forward Characteristics

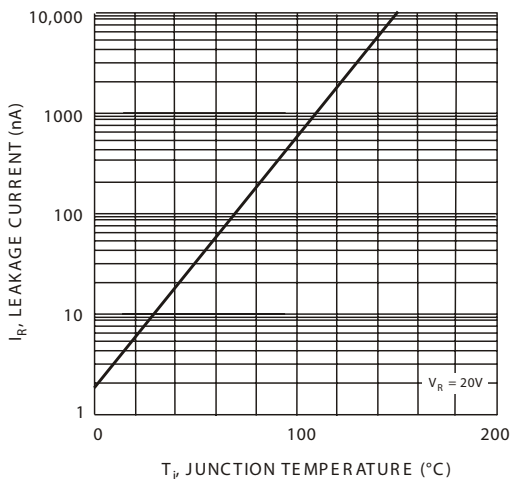


Fig. 3 Leakage Current vs. Junction Temperature