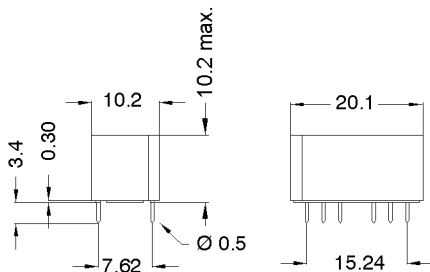



**DIMENSIONS (mm)**

 Pins: Ø0.5 mm  
 L = 3,4±0.3 mm  
 Material: Cu-alloy tinned


tolerances according to DIN ISO 2768 m

**LAYOUT (62D)**

pitch 2.54 mm/Top view


**MARKING**

 MEDER-Label  
 Type  
 Production code,  
 EN60062/Factory code

Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		477	530	583	Ohm
Coil voltage			12		VDC
Rated power			272		mW
Pull-In voltage				9	VDC
Drop-Out voltage		1,8			VDC

Contact data 90	Conditions	Min	Typ	Max	Unit
Contact-form		C			
Contact-material		Rhodium			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			3	W
Switching voltage	DC or Peak AC			175	V
Switching current	DC or Peak AC			0,25	A
Carry current	DC or Peak AC			1	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	1			GOhm
Breakdown voltage	according to IEC 255-5	200			VDC
Operate time, incl. bounce	measured with 40% overdrive			0,7	ms
Release time	measured with no coil excitation			1,5	ms
Capacity	@ 10 kHz		1		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Insulation resistance Coil/Contact	RH <45%, 200 VDC test voltage	10			GOhm
Insulation voltage Coil/Contact	according to IEC 255-5	1,5			kV DC
Housing material		PBT glass fibre reinforced			
Sealing compound		Polyurethan			
Connection pins		Copper alloy tin plated			
number of contacts		2			

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Ambient temperature		-20		70	°C
Storage temperature		-25		85	°C
Soldering temperature	max. 5 sec			260	°C
Cleaning		fully sealed			