
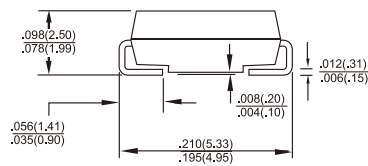


RS1A - RS1M

1.0 AMP. Surface Mount Fast Recovery Rectifiers

SMA/DO-214AC



Dimensions in inches and (millimeters)

Marking Diagram



RS1X = Specific Device Code
 G = Green Compound
 Y = Year
 M = Work Month

Features

- ✧ UL Recognized File # E-326243
- ✧ For surface mounted application
- ✧ Glass passivated junction chip
- ✧ Built-in strain relief, ideal for automated placement
- ✧ Plastic material used carries Underwriters Laboratory Classification 94V-0
- ✧ Fast switching for high efficiency
- ✧ High temperature soldering: 260°C/ 10 seconds at terminals
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Terminals: Pure tin plated, Lead free.
- ✧ Polarity: Indicated by cathode band
- ✧ Packing: 12mm tape per EIA STD RS-481
- ✧ Weight: 0.064 grams

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number	Symbol	RS 1A	RS 1B	RS 1D	RS 1G	RS 1J	RS 1K	RS 1M	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current See Fig. 1 @ T _L =90 °C	I _{F(AV)}	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	30							A
Maximum Instantaneous Forward Voltage @ 1.0A	V _F	1.3							V
Maximum DC Reverse Current at Rated DC Blocking Voltage (Note 1)	I _R	5 50							uA uA
Maximum Reverse Recovery Time (Note 4)	T _{rr}	150			250	500		nS	
Typical Junction Capacitance (Note 2)	C _j	10							pF
Typical Thermal Resistance (Note 3)	R _{θJA} R _{θJL}	105 32							°C /W
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

- Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle
 2. Measured at 1 MHz and Applied V_R=4.0 Volts
 3. Mounted on P.C.B. with 0.2"x0.2" (5.0 x 5.0 mm) Copper Pad Areas.
 4. Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

RATINGS AND CHARACTERISTIC CURVES (RS1A THRU RS1M)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

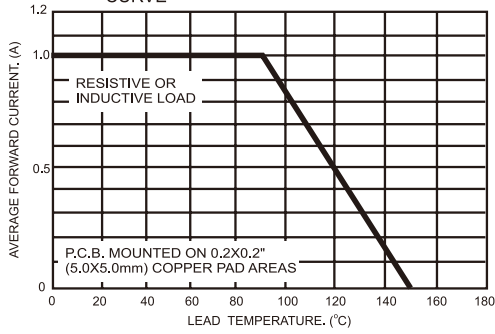


FIG.2- TYPICAL REVERSE CHARACTERISTICS

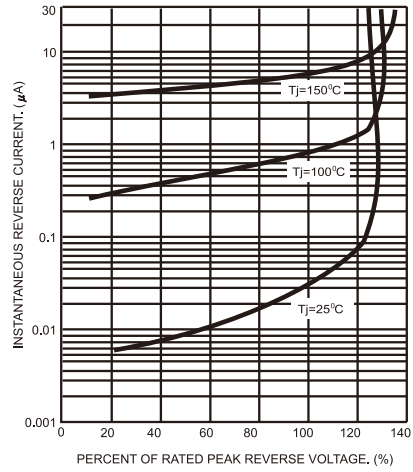


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

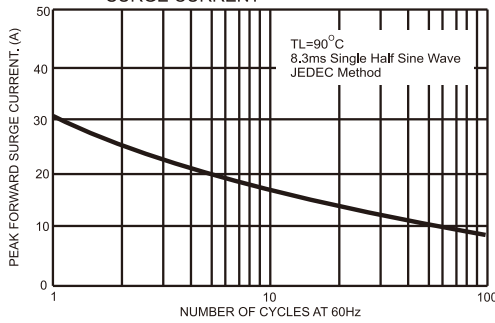


FIG.5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

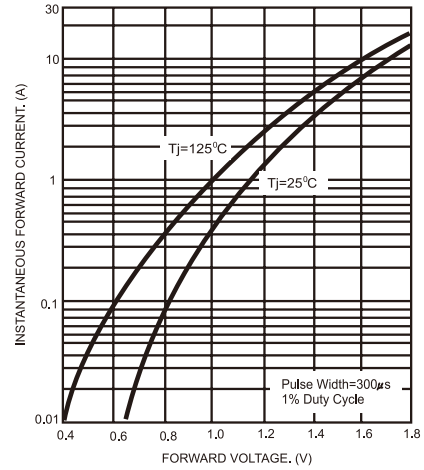


FIG.4- TYPICAL JUNCTION CAPACITANCE

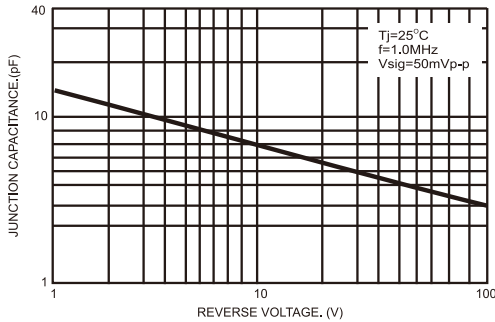


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

