


- Used as AC Power Line Filters in CTV, VTR, Audios, PC's, Facsimilies and Power Supply Applications
- UL940-V Recognized Materials
- Temperature Rise : 45°C Max.
- UL1446 Insulating System
- 2000 Vrms Isolation


Electrical Parameters @ 25° C

Part Number	Inductance (mH Min.) [Pins 1-2, 4-3]	Current Rating (A rms Max.)
EPZ3055HN-801	0.8	3.0
EPZ3055HN-132	1.3	2.2
EPZ3055HN-232	2.3	1.7
EPZ3055HN-292	2.9	1.5
EPZ3055HN-372	3.7	1.3
EPZ3055HN-542	5.4	1.1
EPZ3055HN-722	7.2	1.0
EPZ3055HN-922	9.2	0.8
EPZ3055HN-143	14	0.7
EPZ3055HN-163	16	0.6
EPZ3055HN-263	26	0.5
EPZ3055HN-353	35	0.4
EPZ3055HN-603	60	0.3
EPZ3055HN-143	142	0.2


Impedance Characteristics

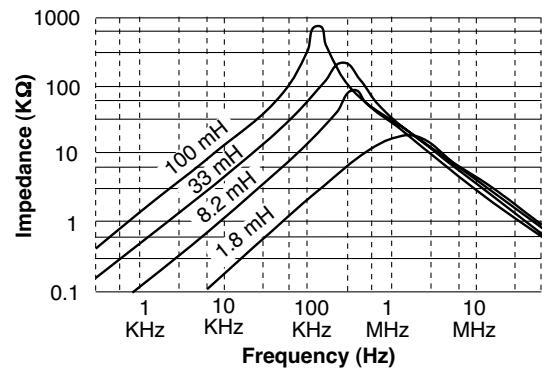


Package

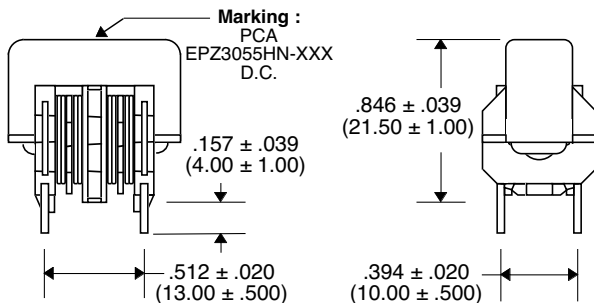


Circuit Sample

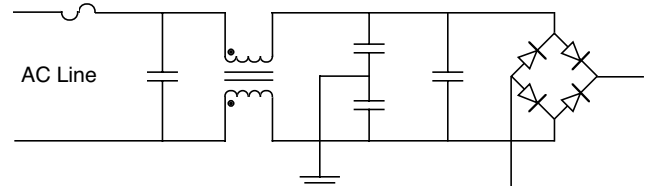

Schematic



Recommended PWB Piercing Plan

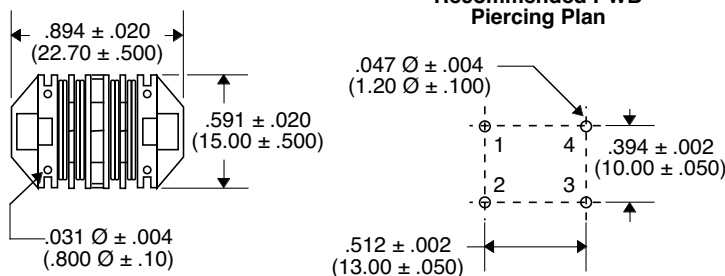

Unless Otherwise Specified Dimensions are in Inches /mm ±.010 / .25