

14118 Stowe Drive, Suite B | Poway, CA 92064
 TEL: (858) 621-2700 | FAX: (858) 486-1927
 URL: www.zcomm.com
 EMAIL: applications@zcomm.com


**Voltage-Controlled Oscillator
 Surface Mount Module**

Applications

- 802.11 WLAN
- Fixed Wireless Broadband
- Direct Broadcast

Application Notes

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

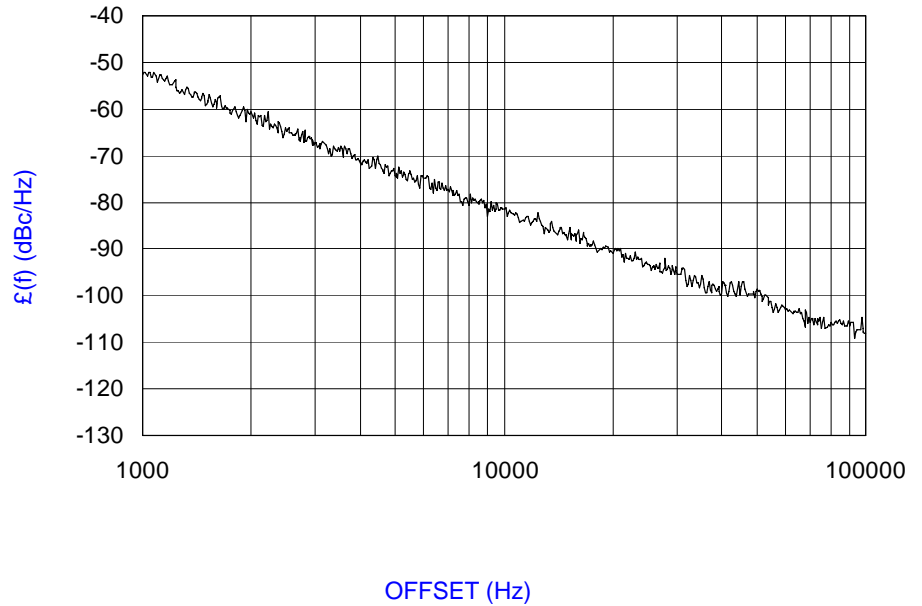


| Performance Specifications | Min | Typ | Max | Units |
|--|------|-------|------|--------------------|
| Oscillation Frequency Range | 5220 | | 5420 | MHz |
| Phase Noise @ 10 kHz offset (1 Hz BW) | | -81 | | dBc/Hz |
| Harmonic Suppression (2nd) | | -30 | | dBc |
| Tuning Voltage | 0.5 | | 4.5 | Vdc |
| Tuning Sensitivity (avg.) | | 178 | | MHz/V |
| Power Output | 1 | 3.5 | 6 | dBm |
| Load Impedance | | 50 | | Ω |
| Input Capacitance | | | 50 | pF |
| Pushing | | | 9 | MHz/V |
| Pulling (14 dB Return Loss, Any Phase) | | | 8 | MHz |
| Operating Temperature Range | -35 | | 75 | $^{\circ}\text{C}$ |
| Package Style | | SUB-L | | |

| Power Supply Requirements | Min | Typ | Max | Units |
|----------------------------|-----|-----|-----|-------|
| Supply Voltage (Vcc, nom.) | | 5 | | Vdc |
| Supply Current (Icc) | | 26 | 32 | mA |


Additional Notes

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.


Tuning Curve, typ.

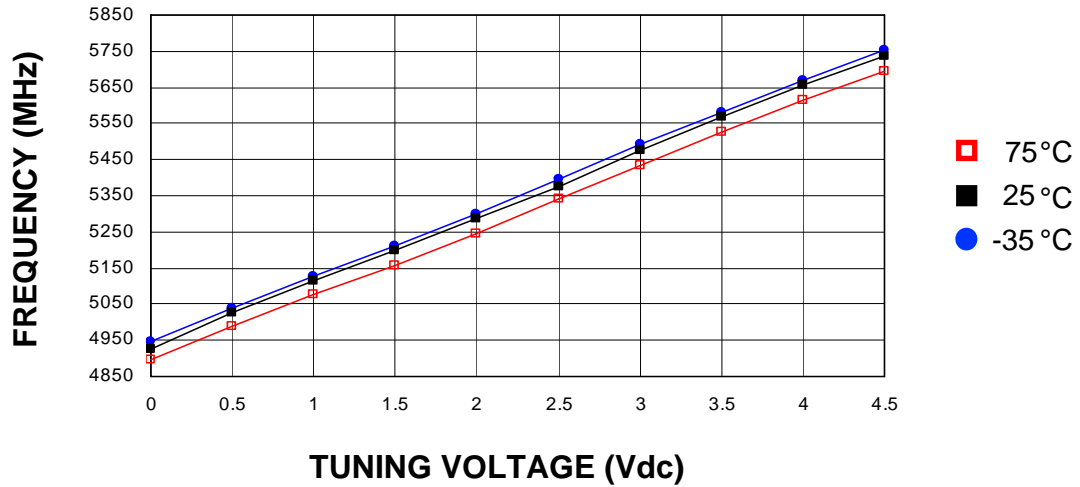


Power Curve, typ.

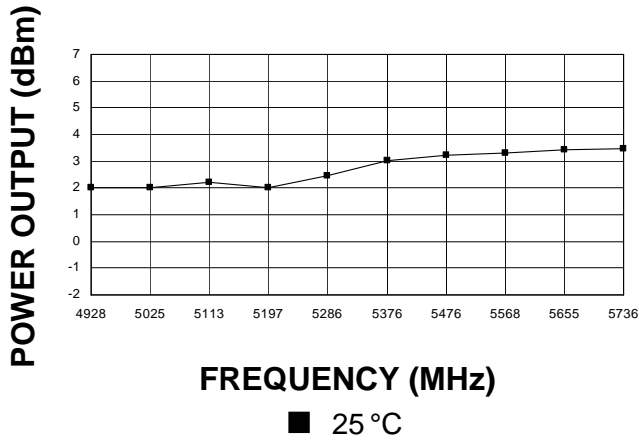

Footprint

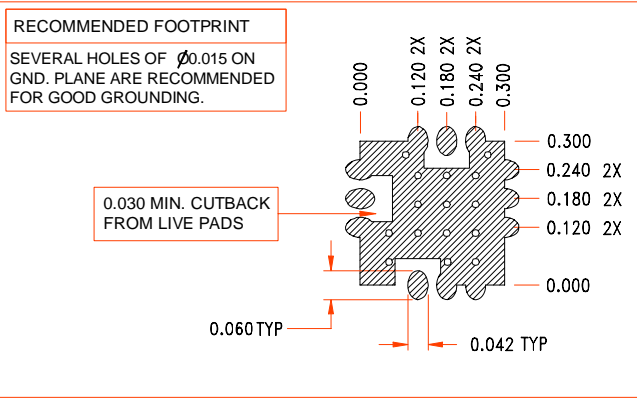

Physical Dimensions

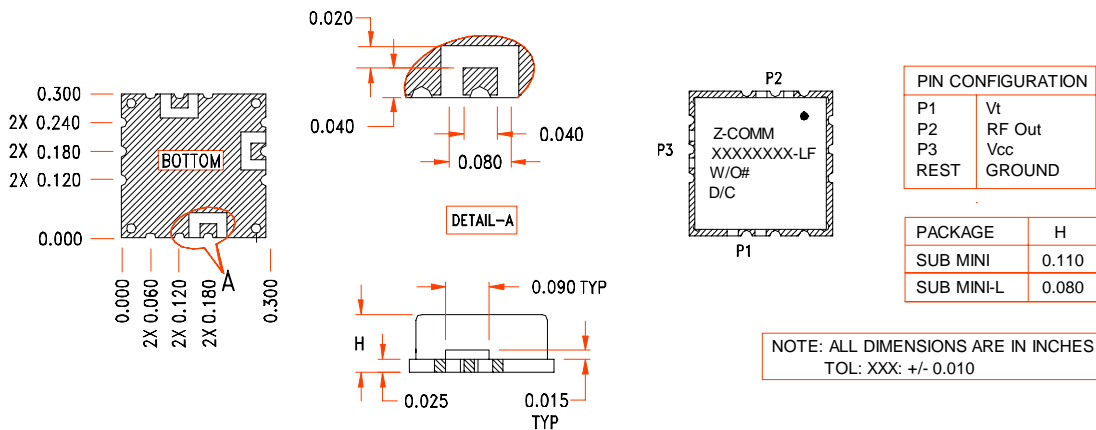

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.