



TS7800I series

3-Terminal Fixed Positive Voltage Regulator

TO-220



ITO-220



Pin assignment:

1. Input
2. Ground
3. Output

(Heatsink surface connected to Pin 2)

**Voltage Range 5V to 24V
Output Current up to 1.5A**

General Description

These voltage regulators are monolithic integrated circuits designed as fixed-voltage regulators for a wide variety of applications including local, on-card regulation. These regulators employ internal current limiting, thermal shutdown, and safe-area compensation. With adequate heatsink they can deliver output currents up to 1.5 ampere.


Although designed primarily as a fixed voltage regulator, these devices can be used with external components to obtain adjustable voltages and currents.

This series is offered in 3-pin TO-220, ITO-220 package.

Features

- ◊ Output current up to 1.5A
- ◊ No external components required
- ◊ Internal thermal overload protection
- ◊ Internal short-circuit current limiting
- ◊ Output transistor safe-area compensation
- ◊ Output voltage offered in 2% tolerance

Standard Application

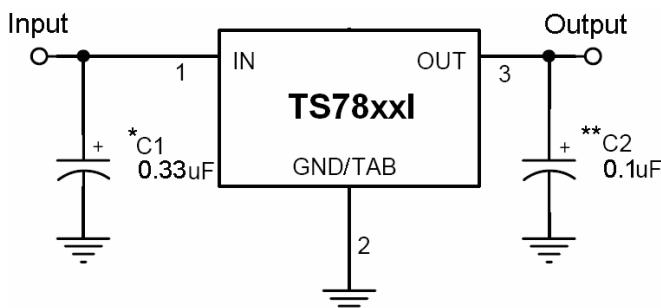

A common ground is required between the input and the output voltages. The input voltage must remain typically 2.0V above the output voltage even during the low point on the Input ripple voltage.

XX = these two digits of the type number indicate voltage.

* = Cin is required if regulator is located an appreciable distance from power supply filter.

** = Co is not needed for stability; however, it does improve transient response.

Ordering Information

Part No.	Operating Temp.	Package
TS78xxICZ	-40 ~ +85°C	TO-220
TS78xxICI		ITO-220

Note: Where xx denotes voltage option.

Absolute Maximum Rating

Input Voltage	Vin *	35	V
Input Voltage	Vin **	40	V
Power Dissipation	Without heatsink	2	
TO-220	Pt ***	15	
TO-220	Without heatsink	10	W
ITO-220			
Operating Junction Temperature Range	T _J	0 ~ +125	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	°C

Note : * TS7805 to TS7818

** TS7824

*** Follow the derating curve

TS7805I Electrical Characteristics

(Vin=10V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output voltage	Vout	Tj=25°C		4.90	5	5.10	V
		7.5V≤Vin≤20V, 10mA≤Iout≤1.5A, PD≤15W		4.80	5	5.20	
Line Regulation	REGline	Tj=25°C	7.5V≤Vin≤25V	--	3	100	mV
			8V≤Vin≤12V	--	1	50	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1.5A	--	15	100	mA
			250mA≤Iout≤750mA	--	5	50	
Quiescent Current	Iq	Iout=0, Tj=25°C		--	4.2	8	mA
Quiescent Current Change	ΔIq	7.5V≤Vin≤25V		--	--	1.3	
		10mA≤Iout≤1.5A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	40	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 8V≤Vin≤18V		62	78	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	17	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	750	--	mA
Peak Output Current	Iop peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-0.6	--	mV/ °C

TS7806I Electrical Characteristics

(Vin=11V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		5.88	6	6.12	V
		8.5V≤Vin≤21V, 10mA≤Iout≤1.5A, PD≤15W		5.76	6	6.24	
Line Regulation	REGline	Tj=25°C	8.5V≤Vin≤25V	--	5	120	mV
			9V≤Vin≤13V	--	1.5	60	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1.5A	--	14	120	mA
			250mA≤Iout≤750mA	--	4	60	
Quiescent Current	Iq	Iout=0, Tj=25°C		--	4.3	8	mA
Quiescent Current Change	ΔIq	8.5V≤Vin≤25V		--	--	1.3	
		10mA≤Iout≤1.5A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	45	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 9V≤Vin≤19V		59	75	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	19	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	550	--	mA
Peak Output Current	Iop peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-0.7	--	mV/ °C

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS7808I Electrical Characteristics

($V_{in}=14V$, $I_{out}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	V_{out}	$T_j=25^{\circ}C$		7.84	8	8.16	V
		$10.5V \leq V_{in} \leq 23V$, $10mA \leq I_{out} \leq 1.5A$, $PD \leq 15W$		7.68	8	8.32	
Line Regulation	REG_{line}	$T_j=25^{\circ}C$	$10.5V \leq V_{in} \leq 25V$	--	6	160	mV
			$11V \leq V_{in} \leq 17V$	--	2	80	
Load Regulation	REG_{load}	$T_j=25^{\circ}C$	$10mA \leq I_{out} \leq 1.5A$	--	12	160	mV
			$250mA \leq I_{out} \leq 750mA$	--	4	80	
Quiescent Current	I_q	$I_{out}=0$, $T_j=25^{\circ}C$		--	4.3	8	mA
Quiescent Current Change	ΔI_q	$10.5V \leq V_{in} \leq 25V$		--	--	1	
		$10mA \leq I_{out} \leq 1.5A$		--	--	0.5	
Output Noise Voltage	V_n	$10Hz \leq f \leq 100KHz$, $T_j=25^{\circ}C$		--	52	--	uV
Ripple Rejection Ratio	RR	$f=120Hz$, $11V \leq V_{in} \leq 21V$		56	72	--	dB
Voltage Drop	V_{drop}	$I_{out}=1.0A$, $T_j=25^{\circ}C$		--	2	--	V
Output Resistance	R_{out}	$f=1KHz$		--	16	--	mΩ
Output Short Circuit Current	I_{os}	$T_j=25^{\circ}C$		--	450	--	mA
Peak Output Current	$I_{o peak}$	$T_j=25^{\circ}C$		--	2.2	--	A
Temperature Coefficient of Output Voltage	$\Delta V_{out}/ \Delta T_j$	$I_{out}=10mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$		--	-0.8	--	mV/ $^{\circ}C$

TS7809I Electrical Characteristics

($V_{in}=15V$, $I_{out}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	V_{out}	$T_j=25^{\circ}C$		8.82	9	9.18	V
		$11.5V \leq V_{in} \leq 23V$, $10mA \leq I_{out} \leq 1.5A$, $PD \leq 15W$		8.64	9	9.36	
Line Regulation	REG_{line}	$T_j=25^{\circ}C$	$11.5V \leq V_{in} \leq 26V$	--	6	180	mV
			$12V \leq V_{in} \leq 17V$	--	2	90	
Load Regulation	REG_{load}	$T_j=25^{\circ}C$	$10mA \leq I_{out} \leq 1.5A$	--	12	180	mV
			$250mA \leq I_{out} \leq 750mA$	--	4	90	
Quiescent Current	I_q	$I_{out}=0$, $T_j=25^{\circ}C$		--	4.3	8	mA
Quiescent Current Change	ΔI_q	$11.5V \leq V_{in} \leq 26V$		--	--	1	
		$10mA \leq I_{out} \leq 1.5A$		--	--	0.5	
Output Noise Voltage	V_n	$10Hz \leq f \leq 100KHz$, $T_j=25^{\circ}C$		--	52	--	uV
Ripple Rejection Ratio	RR	$f=120Hz$, $12V \leq V_{in} \leq 22V$		55	72	--	dB
Voltage Drop	V_{drop}	$I_{out}=1.0A$, $T_j=25^{\circ}C$		--	2	--	V
Output Resistance	R_{out}	$f=1KHz$		--	16	--	mΩ
Output Short Circuit Current	I_{os}	$T_j=25^{\circ}C$		--	450	--	mA
Peak Output Current	$I_{o peak}$	$T_j=25^{\circ}C$		--	2.2	--	A
Temperature Coefficient of Output Voltage	$\Delta V_{out}/ \Delta T_j$	$I_{out}=10mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$		--	-1	--	mV/ $^{\circ}C$

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS7810I Electrical Characteristics

(Vin=16V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		9.8	10	10.2	V
		12.5V≤Vin≤25V, 10mA≤Iout≤1.5A, PD≤15W		9.6	10	10.4	
Line Regulation	REGline	Tj=25°C	12.5V≤Vin≤28V	--	7	200	mV
			13V≤Vin≤17V	--	2	100	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1.5A	--	12	200	mV
			250mA≤Iout≤750mA	--	4	100	
Quiescent Current	Iq	Iout=0, Tj=25°C		--	4.3	8	mA
Quiescent Current Change	ΔIq	12.5V≤Vin≤28V		--	--	1	
		10mA≤Iout≤1.5A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	70	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 13V≤Vin≤23V		55	71	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	18	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	400	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1	--	mV/ °C

TS7812I Electrical Characteristics

(Vin=19V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		11.76	12	12.24	V
		14.5V≤Vin≤27V, 10mA≤Iout≤1.5A, PD≤15W		11.52	12	12.48	
Line Regulation	REGline	Tj=25°C	14.5V≤Vin≤30V	--	10	240	mV
			15V≤Vin≤19V	--	3	120	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1.5A	--	12	240	mV
			250mA≤Iout≤750mA	--	4	120	
Quiescent Current	Iq	Tj=25°C, Iout=0		--	4.3	8	mA
Quiescent Current Change	ΔIq	14.5V≤Vin≤30V		--	--	1	
		10mA≤Iout≤1.5A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	75	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 15V≤Vin≤25V		55	71	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	18	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	350	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1	--	mV/ °C

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS7815I Electrical Characteristics

(Vin=23V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		14.70	15	15.30	V
		17.5V≤Vin≤30V, 10mA≤Iout≤1.5A, PD ≤15W		14.40	15	15.60	
Line Regulation	REGline	Tj=25°C	17.5V≤Vin≤30V	--	12	300	mV
			18V≤Vin≤22V	--	3	150	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1.5A	--	12	300	mV
			250mA≤Iout≤750mA	--	4	150	
Quiescent Current	Iq	Tj=25°C, Iout=0		--	4.3	8	mA
Quiescent Current Change	ΔIq	17.5V≤Vin≤30V		--	--	1	
		10mA≤Iout≤1.5A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	90	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 18V≤Vin≤28V		54	70	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	19	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	230	--	mA
Peak Output Current	Iop peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1	--	mV/ °C

TS7818I Electrical Characteristics

(Vin=27V, Iout=500mA, 0°C≤Tj≤125°C, Cin=0.33uF, Cout=0.1uF; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	Vout	Tj=25°C		17.64	18	18.36	V
		21V≤Vin≤33V, 10mA≤Iout≤1.5A, PD ≤15W		17.28	18	18.72	
Line Regulation	REGline	Tj=25°C	21V≤Vin≤33V	--	15	360	mV
			22V≤Vin≤26V	--	5	180	
Load Regulation	REGload	Tj=25°C	10mA≤Iout≤1.5A	--	12	360	mV
			250mA≤Iout≤750mA	--	4	180	
Quiescent Current	Iq	Tj=25°C, Iout=0		--	4.5	8	mA
Quiescent Current Change	ΔIq	21V≤Vin≤33V		--	--	1	
		10mA≤Iout≤1.5A		--	--	0.5	
Output Noise Voltage	Vn	10Hz≤f≤100KHz, Tj=25°C		--	110	--	uV
Ripple Rejection Ratio	RR	f=120Hz, 21V≤Vin≤31V		54	70	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2	--	V
Output Resistance	Rout	f=1KHz		--	22	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	200	--	mA
Peak Output Current	Iop peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	ΔVout/ ΔTj	Iout=10mA, 0°C≤Tj≤125°C		--	-1	--	mV/ °C

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.

TS7824I Electrical Characteristics


($V_{in}=33V$, $I_{out}=500mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Output Voltage	V_{out}	$T_j=25^{\circ}C$		23.52	24	24.48	V
		$27V \leq V_{in} \leq 38V$, $10mA \leq I_{out} \leq 1.5A$, $PD \leq 15W$		23.04	24	24.96	
Line Regulation	REG_{line}	$T_j=25^{\circ}C$	$27V \leq V_{in} \leq 38V$	--	18	480	mV
			$28V \leq V_{in} \leq 32V$	--	6	240	
Load Regulation	REG_{load}	$T_j=25^{\circ}C$	$10mA \leq I_{out} \leq 1.5A$	--	12	480	
			$250mA \leq I_{out} \leq 750mA$	--	4	240	
Quiescent Current	I_q	$I_{out}=0$, $T_j=25^{\circ}C$		--	4.6	8	mA
Quiescent Current Change	ΔI_q	$27V \leq V_{in} \leq 38V$		--	--	1	
		$10mA \leq I_{out} \leq 1.5A$		--	--	0.5	
Output Noise Voltage	V_n	$10Hz \leq f \leq 100KHz$, $T_j=25^{\circ}C$		--	170	--	uV
Ripple Rejection Ratio	RR	$f=120Hz$, $27V \leq V_{in} \leq 37V$		54	70	--	dB
Voltage Drop	V_{drop}	$I_{out}=1.0A$, $T_j=25^{\circ}C$		--	2	--	V
Output Resistance	R_{out}	$f=1KHz$		--	28	--	$m\Omega$
Output Short Circuit Current	I_{os}	$T_j=25^{\circ}C$		--	150	--	mA
Peak Output Current	$I_{o peak}$	$T_j=25^{\circ}C$		--	2.2	--	A
Temperature Coefficient of Output Voltage	$\Delta V_{out}/ \Delta T_j$	$I_{out}=10mA$, $0^{\circ}C \leq T_j \leq 125^{\circ}C$		--	-1.5	--	$mV/ ^{\circ}C$

- Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible, and thermal effects must be taken into account separately.
- This specification applies only for DC power dissipation permitted by absolute maximum ratings.


Electrical Characteristics Curve

**FIGURE 1 - Worst Case Power Dissipation v.s.
Ambient Temperature**

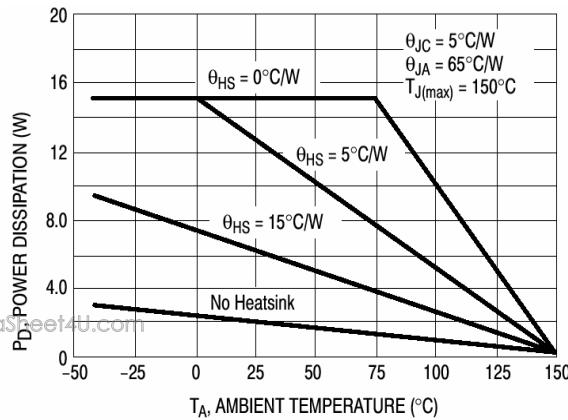


www.DataSheet4U.com


**FIGURE 2 - Peak Output Current v.s.
Input-Output Differential Voltage**

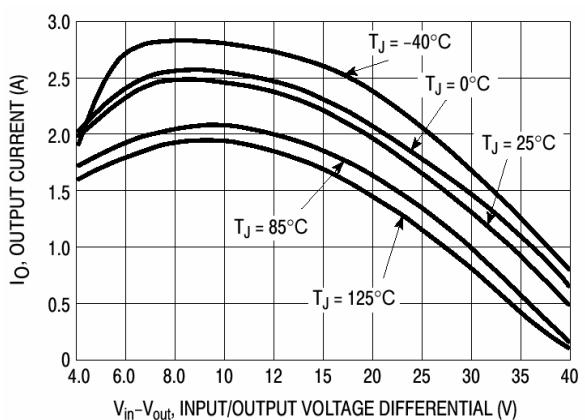


**FIGURE 3 – Quiescent Current v.s.
Junction Temperature**

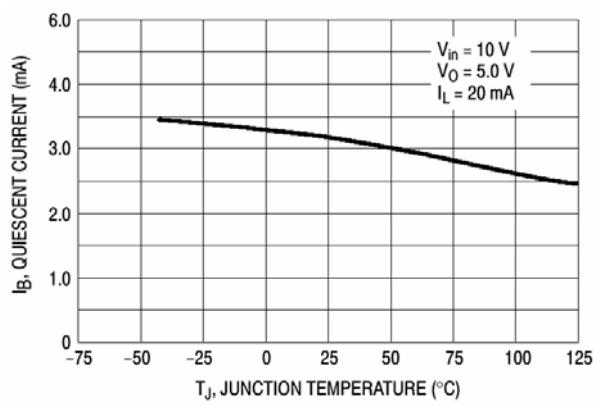


**FIGURE 4 – Input Output Differential v.s.
Junction Temperature**

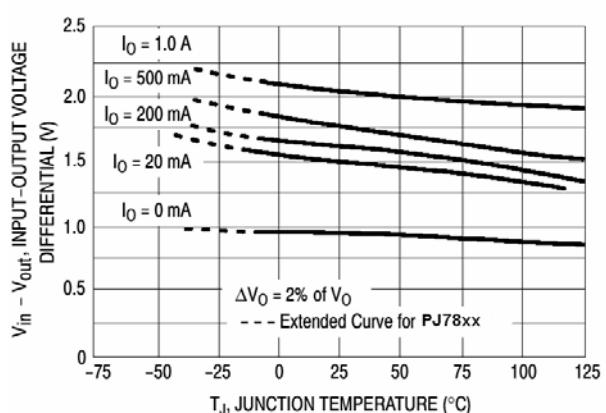


**FIGURE 5 – Output Voltage v.s.
Junction Temperature**

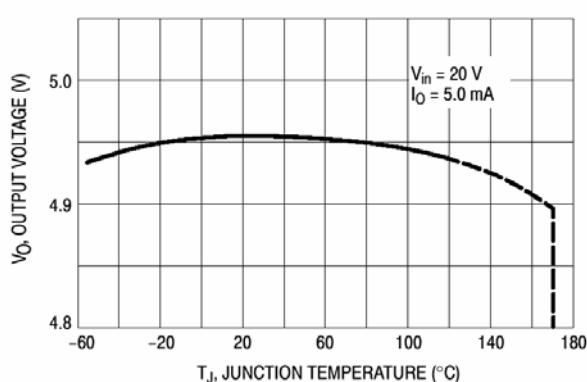

**FIGURE 6 – Output Impedance v.s.
Output Voltage**

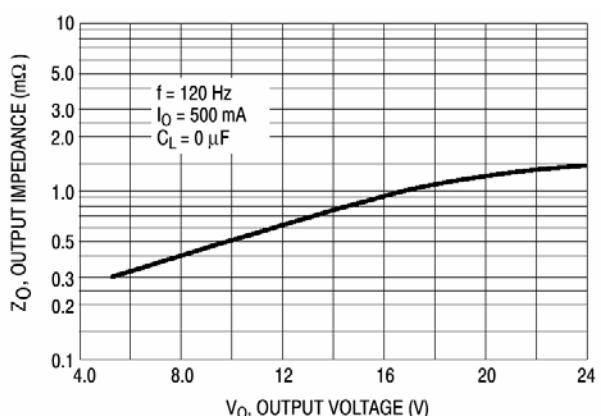


TO-220 Mechanical Drawing

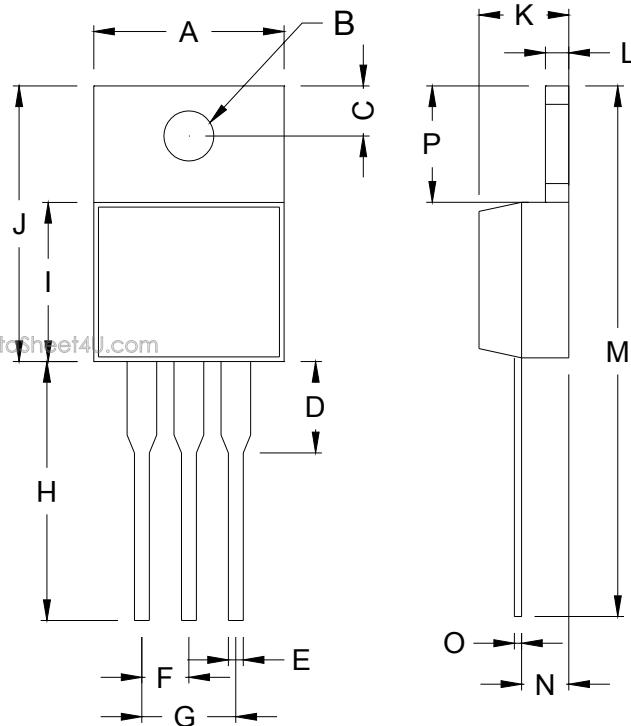

TO-220 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.000	10.500	0.394	0.413
B	3.240	4.440	0.128	0.175
C	2.440	2.940	0.096	0.116
D	-	6.350	-	0.250
E	0.381	1.106	0.015	0.040
F	2.345	2.715	0.092	0.058
G	4.690	5.430	0.092	0.107
H	12.700	14.732	0.500	0.581
I	8.382	9.017	0.330	0.355
J	14.224	16.510	0.560	0.650
K	3.556	4.826	0.140	0.190
L	0.508	1.397	0.020	0.055
M	27.700	29.620	1.060	1.230
N	2.032	2.921	0.080	0.115
O	0.255	0.610	0.010	0.024
P	5.842	6.858	0.230	0.270

ITO-220 Mechanical Drawing

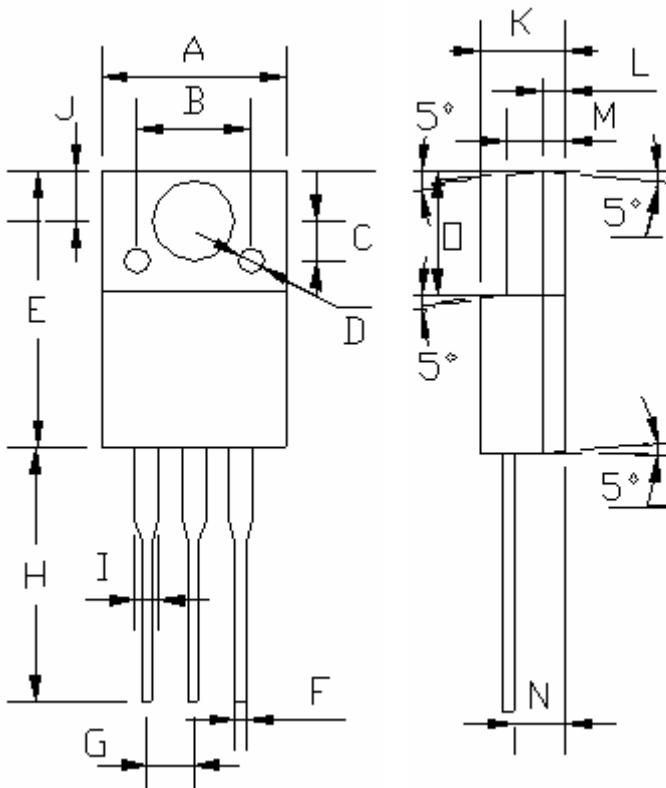

ITO-220 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	10.04	10.07	0.395	0.396
B	6.20 (typ.)		0.244 (typ.)	
C	2.20 (typ.)		0.087 (typ.)	
D	§ 1.40 (typ.)		§ 0.055 (typ.)	
E	15.0	15.20	0.591	0.598
F	0.52	0.54	0.020	0.021
G	2.35	2.73	0.093	0.107
H	13.50	13.55	0.531	0.533
I	1.11	1.49	0.044	0.058
J	2.60	2.80	0.102	0.110
K	4.49	4.50	0.176	0.177
L	1.15 (typ.)		0.045 (typ.)	
M	3.03	3.05	0.119	0.120
N	2.60	2.80	0.102	0.110
O	6.55	6.65	0.258	0.262