


PTI-5NF05 (MINI SIZE)

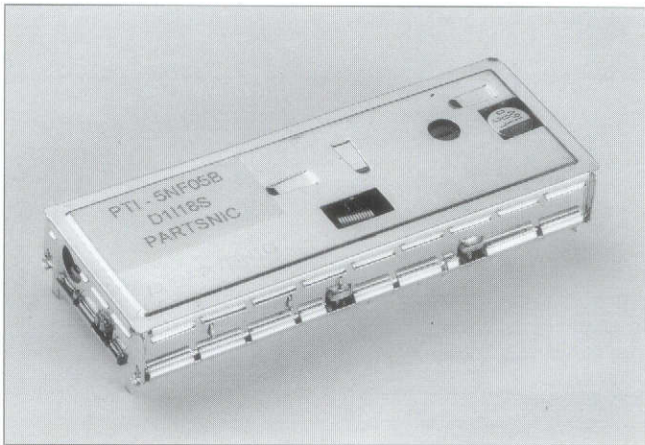


■ FEATURE

- TUNER + PIF
- Korean Hi-Fi/Mono System.
- Compact size.
- Upper Heterodyne Receiving System.
- Picture Intermediate Frequency 45.75 MHz.
- Frequency Synthesize System.

■ SPECIFICATIONS

No	Item	Specifications	No	Item	Specifications																				
1-1	Tuning System	Frequency synthesizer	1-8	TUNER	<table border="1"> <thead> <tr> <th>BAND</th> <th>PG Spec</th> <th>Current</th> </tr> </thead> <tbody> <tr> <td>VL</td> <td>40dB Typ</td> <td>140mA max</td> </tr> <tr> <td>VH</td> <td>40dB Typ</td> <td>140mA max</td> </tr> <tr> <td>U</td> <td>35dB Typ</td> <td>140mA max</td> </tr> </tbody> </table>	BAND	PG Spec	Current	VL	40dB Typ	140mA max	VH	40dB Typ	140mA max	U	35dB Typ	140mA max								
BAND	PG Spec	Current																							
VL	40dB Typ	140mA max																							
VH	40dB Typ	140mA max																							
U	35dB Typ	140mA max																							
1-2	IF frequency	PIF : 45.75MHz CIF : 42.17MHz SIF : 41.25MHz	1-9	IF	<table border="1"> <thead> <tr> <th colspan="2">DATA</th> </tr> </thead> <tbody> <tr> <td>Video Output</td> <td>1.0Vp-p Typ</td> </tr> <tr> <td>Video S/N</td> <td>47dB Typ</td> </tr> <tr> <td>Burst ration</td> <td>28.5% Typ</td> </tr> <tr> <td>Audio Output</td> <td>370mVrms Typ</td> </tr> <tr> <td>Audio S/N</td> <td>45dB min</td> </tr> <tr> <td>Audio Sync buzz</td> <td>50mVp-p max</td> </tr> <tr> <td>SIF Output</td> <td>75dBμV Typ</td> </tr> </tbody> </table>	DATA		Video Output	1.0Vp-p Typ	Video S/N	47dB Typ	Burst ration	28.5% Typ	Audio Output	370mVrms Typ	Audio S/N	45dB min	Audio Sync buzz	50mVp-p max	SIF Output	75dB μ V Typ				
DATA																									
Video Output	1.0Vp-p Typ																								
Video S/N	47dB Typ																								
Burst ration	28.5% Typ																								
Audio Output	370mVrms Typ																								
Audio S/N	45dB min																								
Audio Sync buzz	50mVp-p max																								
SIF Output	75dB μ V Typ																								
1-3	Receiving Channel	VHF Low : B~2 CH VHF High : W+11~C CH UHF : 69~W+12 CH (US + CATV NTSC-181CH)			1-10	Band Data	<table border="1"> <thead> <tr> <th></th> <th>BS4</th> <th>BS3</th> <th>BS2</th> <th>BS1</th> </tr> </thead> <tbody> <tr> <td>VHF Low</td> <td>0</td> <td>0</td> <td>0</td> <td>1</td> </tr> <tr> <td>VHF High</td> <td>0</td> <td>0</td> <td>1</td> <td>0</td> </tr> <tr> <td>UHF</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> </tr> </tbody> </table>		BS4	BS3	BS2	BS1	VHF Low	0	0	0	1	VHF High	0	0	1	0	UHF	1	0
	BS4	BS3	BS2	BS1																					
VHF Low	0	0	0	1																					
VHF High	0	0	1	0																					
UHF	1	0	0	0																					
1-4	Supply Voltage	<table border="1"> <thead> <tr> <th>Terminal</th> <th>Supply Voltage</th> <th>Tolerance</th> </tr> </thead> <tbody> <tr> <td>B+</td> <td>5.0V</td> <td>\pm0.1V</td> </tr> </tbody> </table>	Terminal	Supply Voltage	Tolerance	B+	5.0V	\pm 0.1V																	
Terminal	Supply Voltage	Tolerance																							
B+	5.0V	\pm 0.1V																							
1-5	Input Impedance	75 ohm																							
1-6	PLL SYSTEM	I ² C Bus																							
1-7	Application Standard	Comply with FCC, UL																							

■ DRAWING (PTI-5NF05)

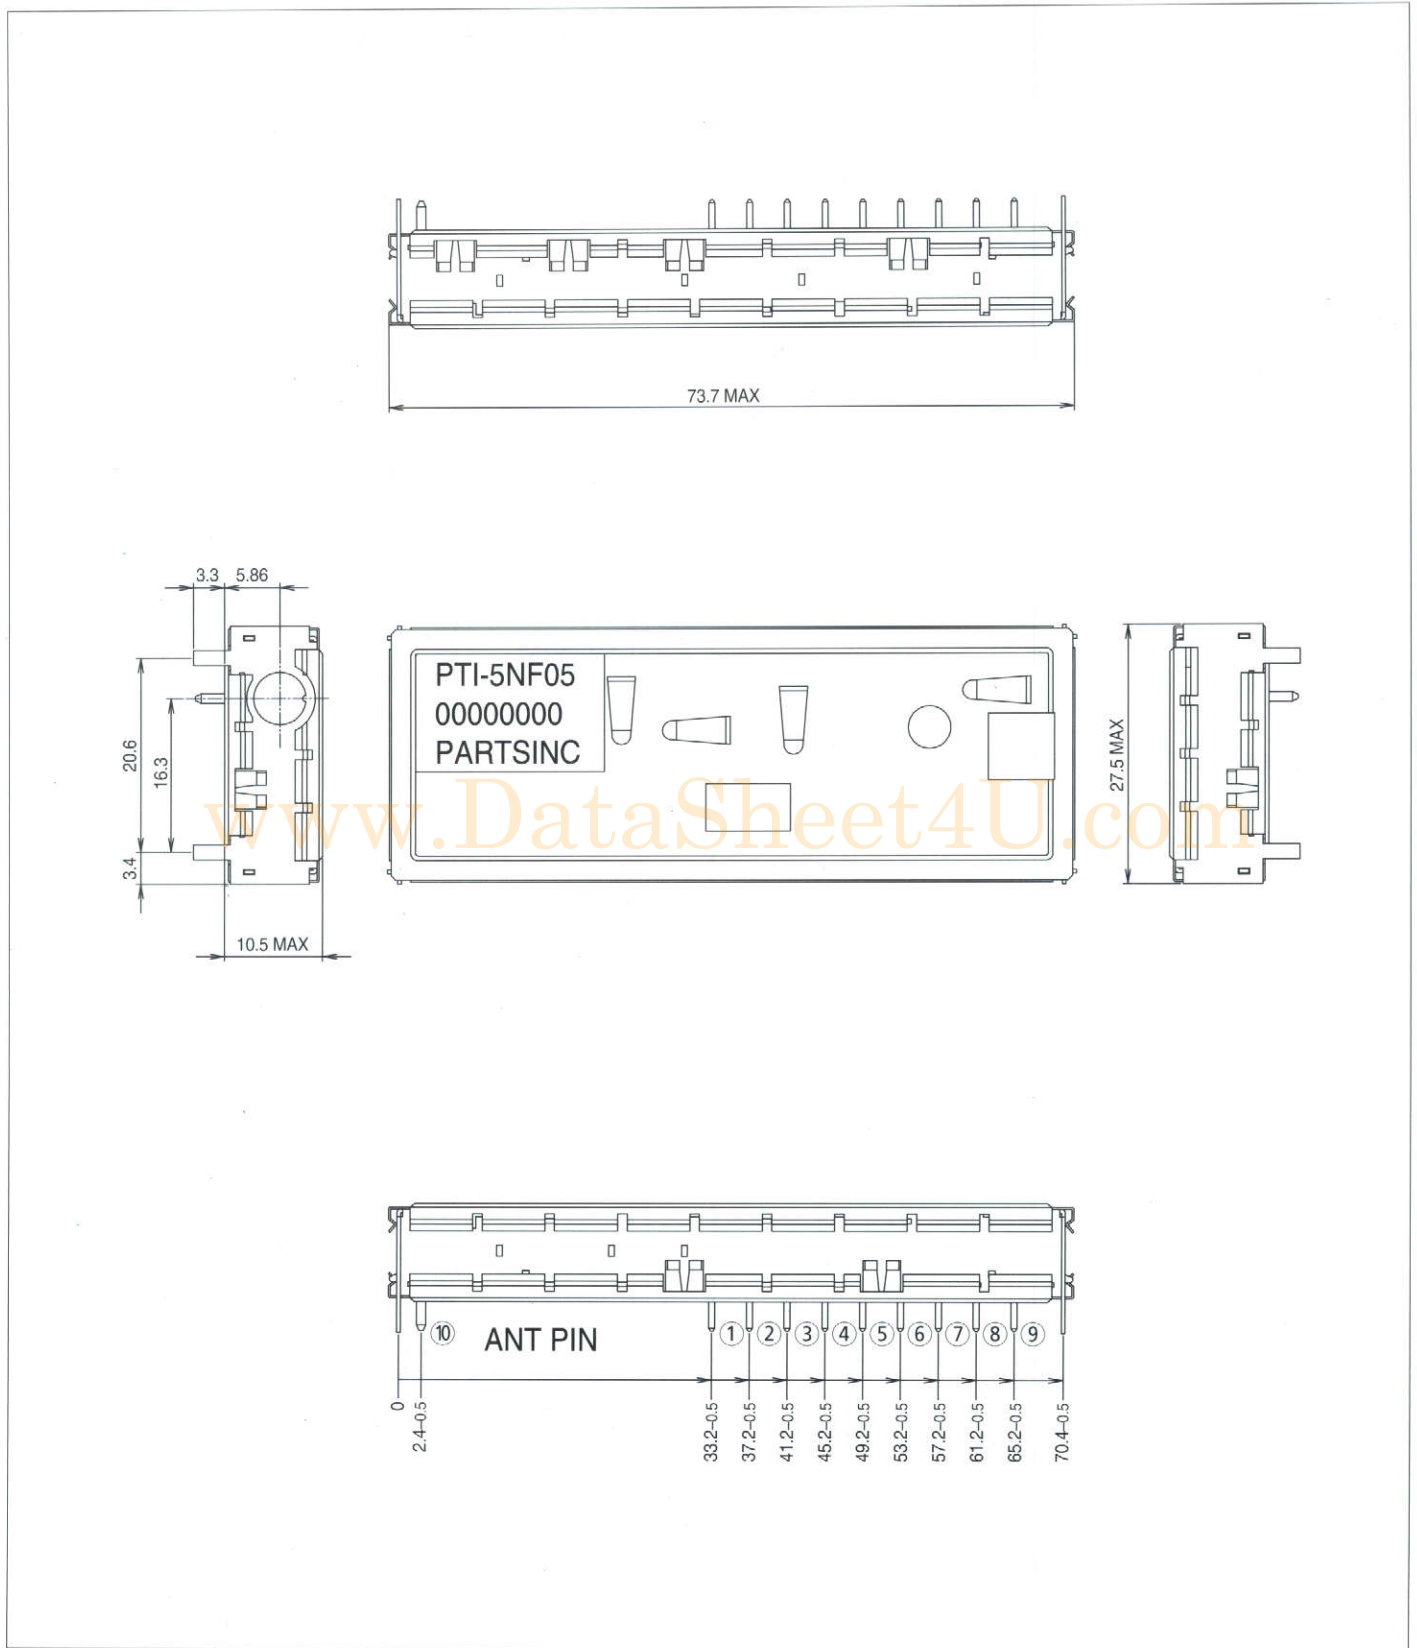

TERMINAL NO	1	2	3	4	5	6	7	8	9	10
TERMINAL NAME	IF	SCL	SDA	+B	AGC	SIF	AFT	AUDIO	VIDEO	ANT