



STPS6045CP/CPI/CW

POWER SCHOTTKY RECTIFIER

MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	2x30 A
V_{RRM}	45 V
$T_j(max)$	175 °C
$V_F(max)$	0.63 V

FEATURES AND BENEFITS

- VERY SMALL CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- EXTREME FAST SWITCHING
- LOW THERMAL RESISTANCE
- INSULATED PACKAGE: TOP-3I
Insulating voltage = 2500V_{RMS}
Capacitance = 12pF

DESCRIPTION


Dual center tap Schottky rectifier suited for switchmode power supply and high frequency DC to DC converters.

Packaged either in SOT-93, TOP-3I or TO-247, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

ABSOLUTE RATINGS (limiting values, per diode)

Symbol	Parameter			Value	Unit
V_{RRM}	Repetitive peak reverse voltage			45	V
$I_{F(RMS)}$	RMS forward current			60	A
$I_{F(AV)}$	Average forward current $\delta = 0.5$	SOT-93 TO-247	$T_c = 150^\circ\text{C}$ Per diode	30	A
		TOP-3I	$T_c = 130^\circ\text{C}$ Per device	60	
I_{FSM}	Surge non repetitive forward current		$t_p = 10$ ms sinusoidal	400	A
I_{RRM}	Repetitive Peak reverse current		$t_p = 2$ μs square $F = 1$ kHz	1	A
I_{RSM}	Non repetitive peak reverse current		$t_p = 100$ μs square	3	A
T_{stg}	Storage temperature range			- 65 to + 175	°C
T_j	Maximum operating junction temperature *			175	°C
dV/dt	Critical rate of rise of reverse voltage			10000	V/ μs

* : $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$ thermal runaway condition for a diode on its own heatsink

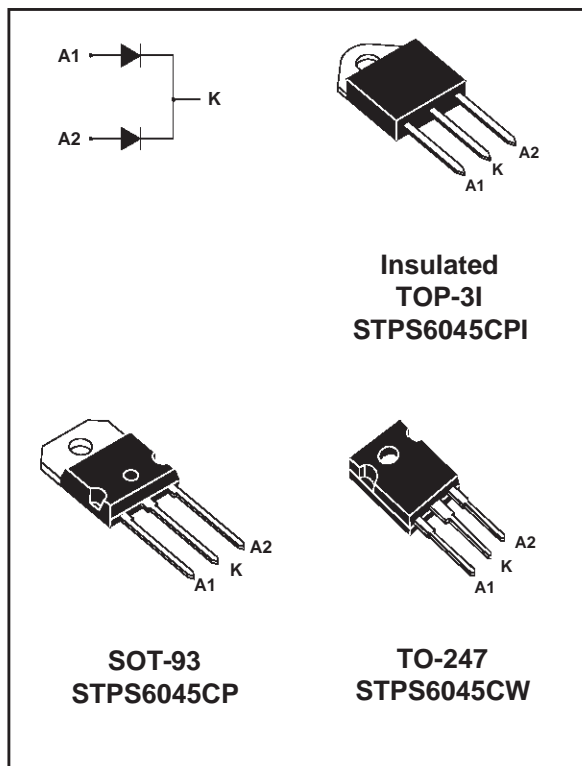

STPS6045CP/CPI/CW**THERMAL RESISTANCES**

Symbol	Parameter		Value	Unit
R _{th(j-c)}	Junction to case	SOT-93/ TO-247	Per diode Total	0.95 0.55
		TOP-3I	Per diode Total	1.8 1.1
R _{th(c)}		SOT-93/ TO-247	Coupling	0.15
		TOP-3I		0.4

When the diodes 1 and 2 are used simultaneously:

$$\Delta T_J(\text{diode 1}) = P(\text{diode 1}) \times R_{th(j-c)} (\text{Per diode}) + P(\text{diode 2}) \times R_{th(c)}$$

STATIC ELECTRICAL CHARACTERISTICS (per diode)

Symbol	Parameter	Tests Conditions		Min.	Typ.	Max.	Unit
I _R *	Reverse leakage current	T _J = 25°C	V _R = V _{RRM}			500	μA
		T _J = 125°C			20	80	mA
V _F *	Forward voltage drop	T _J = 125°C	I _F = 30 A		0.53	0.63	V
		T _J = 25°C	I _F = 60 A			0.84	
		T _J = 125°C	I _F = 60 A		0.68	0.78	

Pulse test : ** tp = 380 μs, δ < 2%

To evaluate the conduction losses use the following equation:

$$P = 0.48 \times I_{F(AV)} + 0.005 I_{F(RMS)}^2$$

Fig. 1: Average forward power dissipation versus average forward current (per diode).

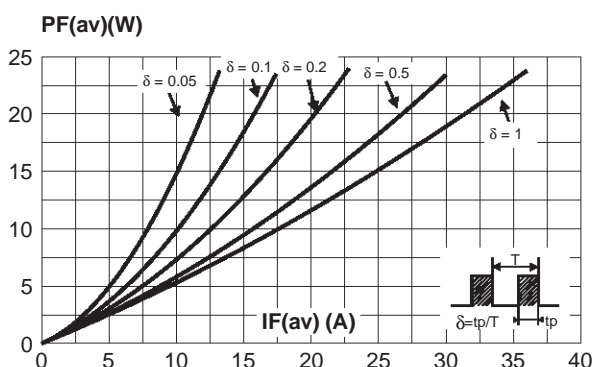


Fig. 2: Average current versus ambient temperature (δ=0.5, per diode).

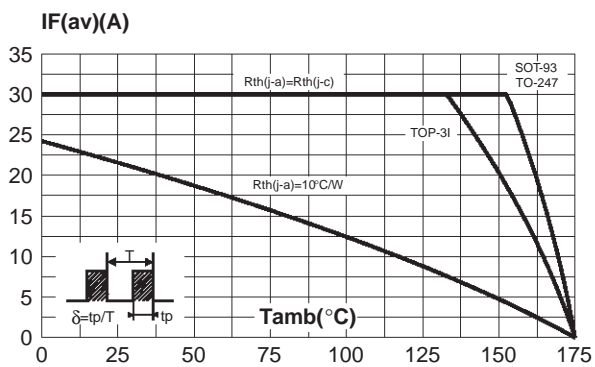


Fig. 3-1: Non repetitive surge peak forward current versus overload duration (maximum values, per diode) (SOT-93 and TO-247).

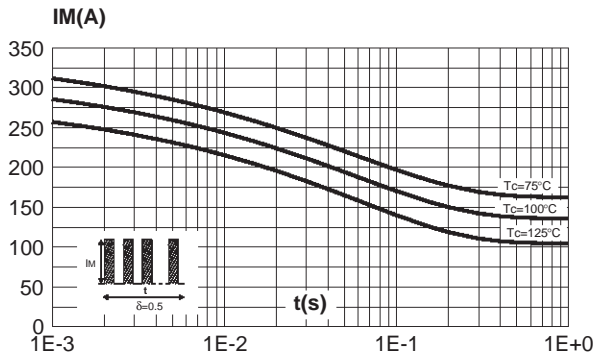


Fig. 4: Relative variation of thermal transient impedance junction to case versus pulse duration.

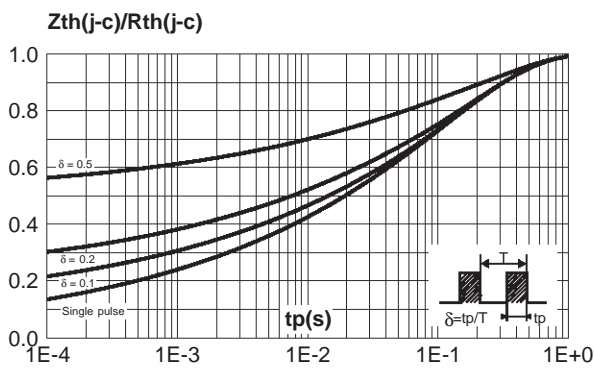


Fig. 6: Junction capacitance versus reverse voltage applied (typical values, per diode).

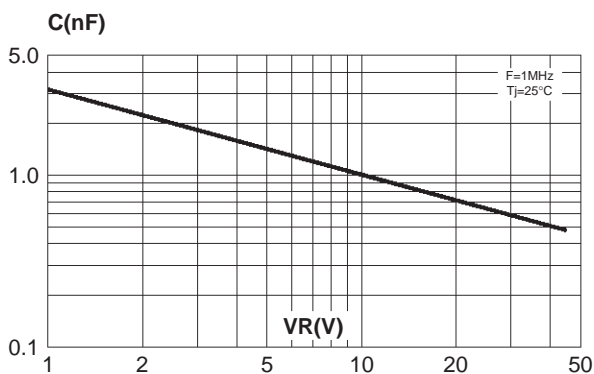


Fig. 3-2: Non repetitive surge peak forward current versus overload duration (maximum values, per diode) (TOP-31).

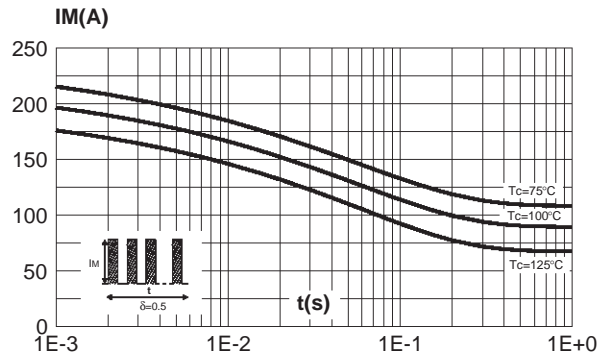


Fig. 5: Reverse leakage current versus reverse voltage applied (typical values, per diode).





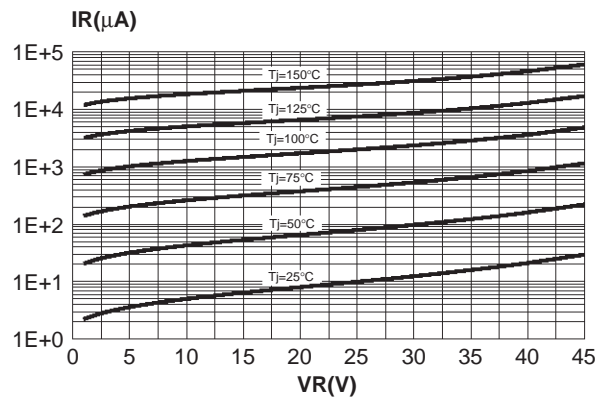


Fig. 7: Forward voltage drop versus forward current (maximum values, per diode).

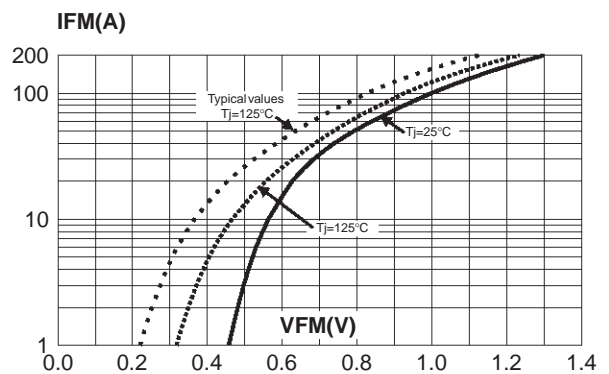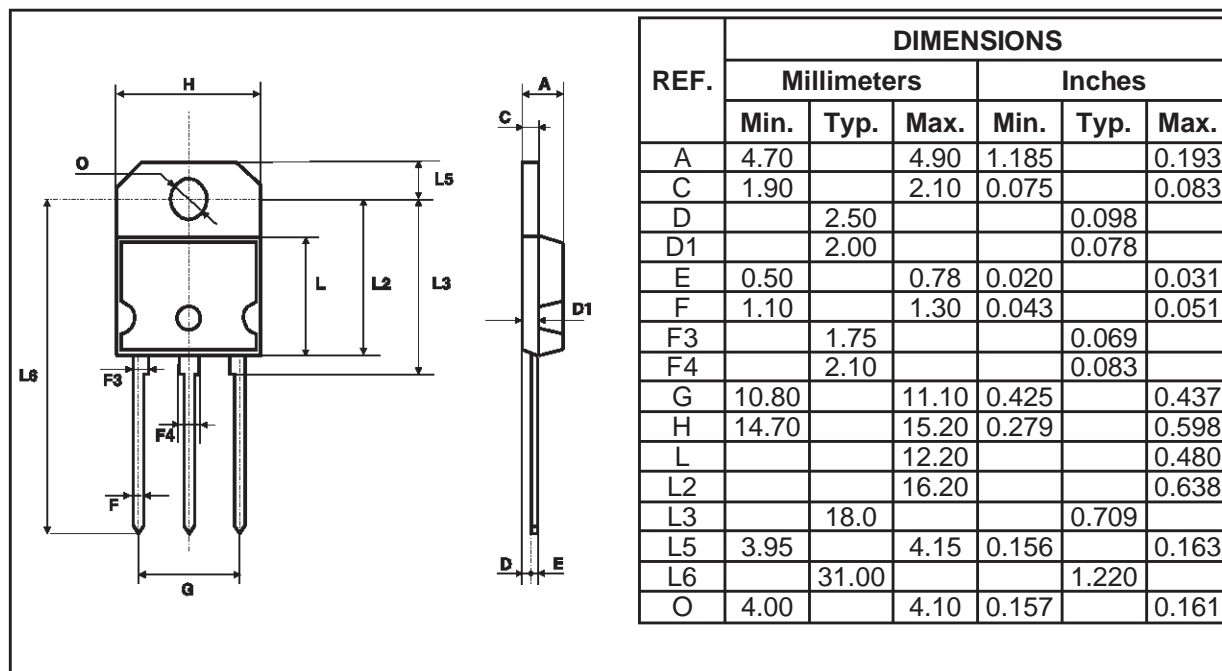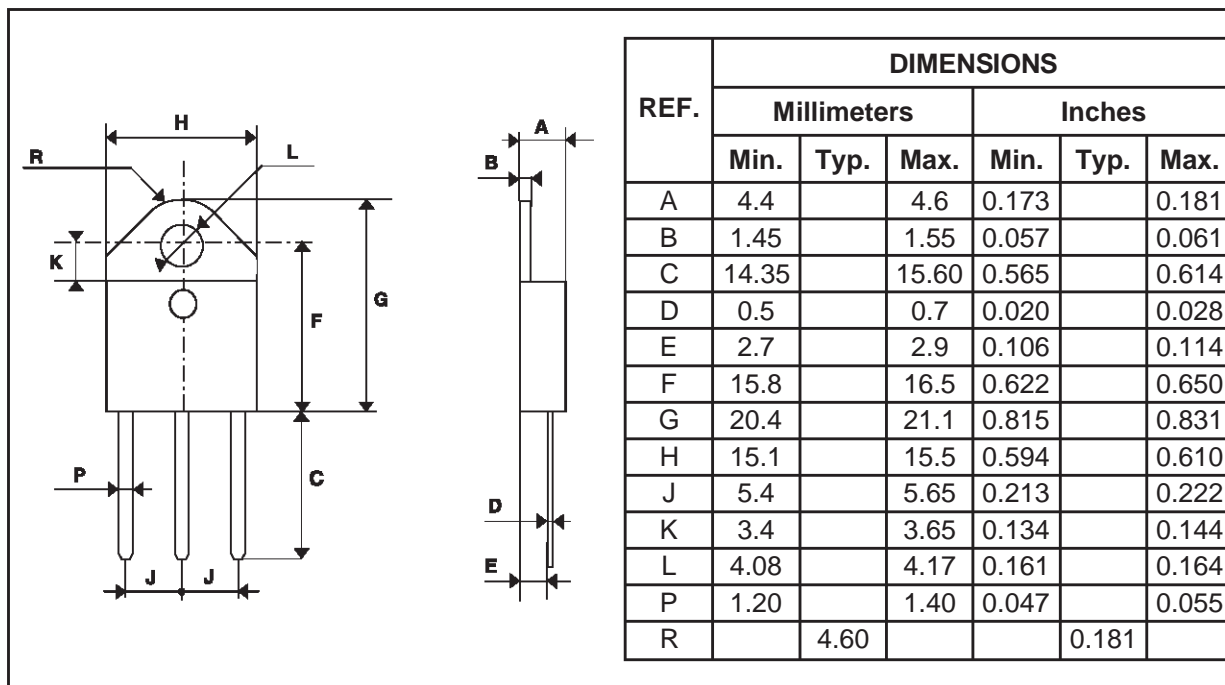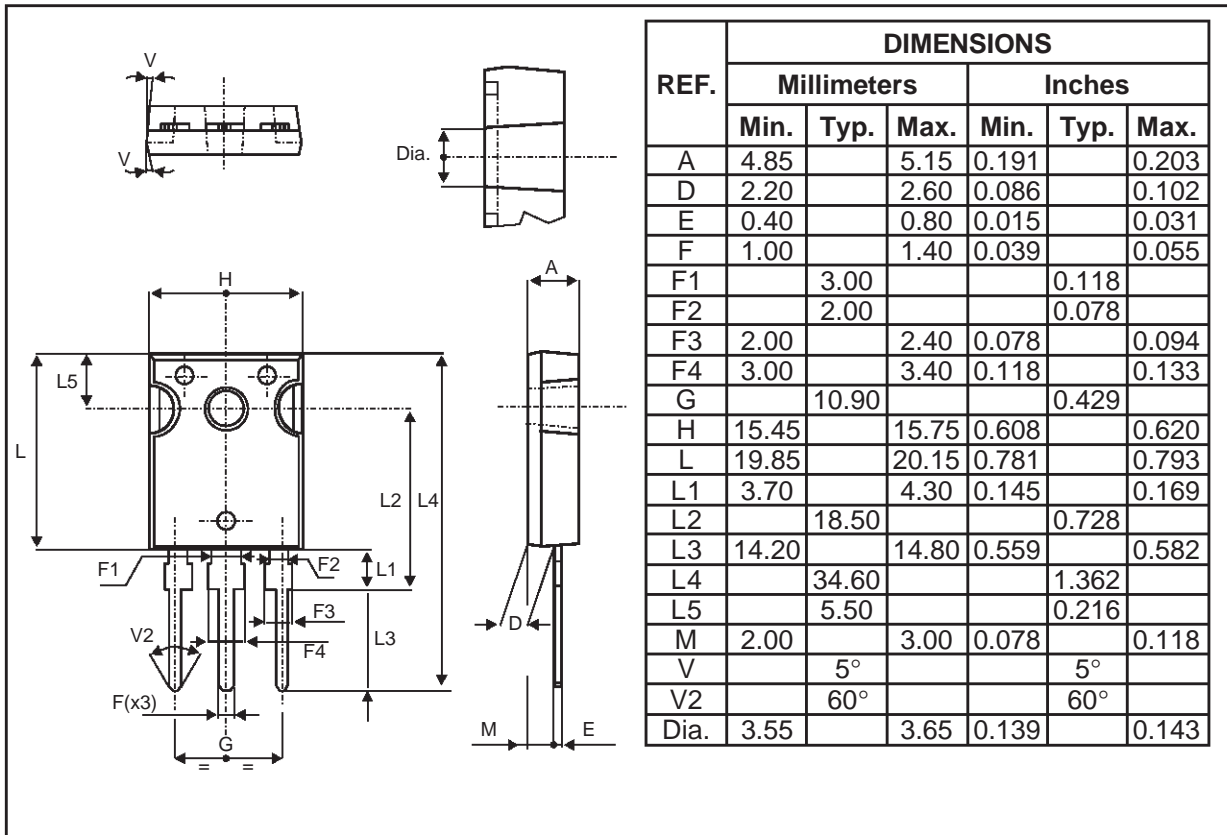

STPS6045CP/CPI/CW**PACKAGE MECHANICAL DATA**
SOT-93**PACKAGE MECHANICAL DATA**
TOP-3I (isolated)

PACKAGE MECHANICAL DATA
 TO-247


Type	Marking	Package	Weight	Base qty	Delivery mode
STPS6045CP	STPS6045CP	SOT-93	3.97 g.	30	Tube
STPS6045CPI	STPS6045CPI	TOP-3I	4.46 g.	30	Tube
STPS6045CW	STPS6045CW	TO-247	4.36 g.	30	Tube

- Cooling method: by conduction (C)
- Recommended torque value: 0.8 N.m.
- Maximum torque value: 1.0 N.m.
- Epoxy meets UL94, V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
 Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>

