



NOTES:



1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: $X.X=\pm 0.4$
 $X.XX=\pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DC
5. OPERATING FORCE: 425 ± 100 CM/STANDARD
6. OPERATING TEMP: -30° to 85° C
7. CIRCUIT DP: 6 POSITIONS, 30° INDEX.
8. DIELECTRIC STRENGTH: 1000V RMS min. @SEA LEVEL
9. DESIGNATE MAJOR DIMENSIONS
10. HARDWARE SUPPLIED ON SWITCH -SEE BELOW
LOCKING, LOCKWASHER, & HEX NUT

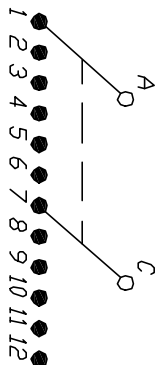

CONTACT CONFIGURATION
Timing: NON-SHORTING

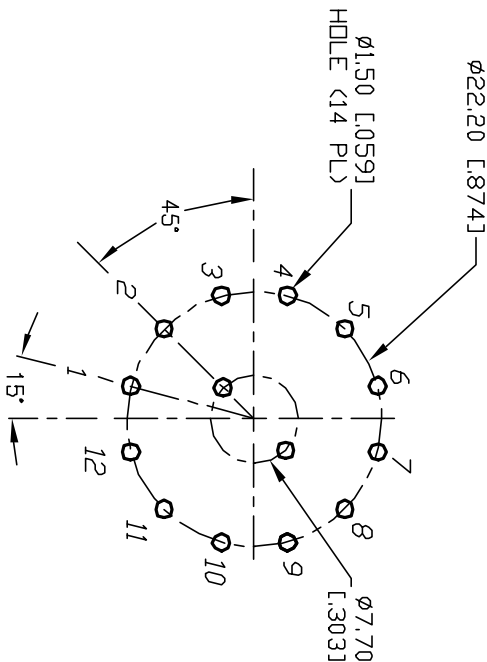

RECOMMENDED P.C.B. LAYOUT

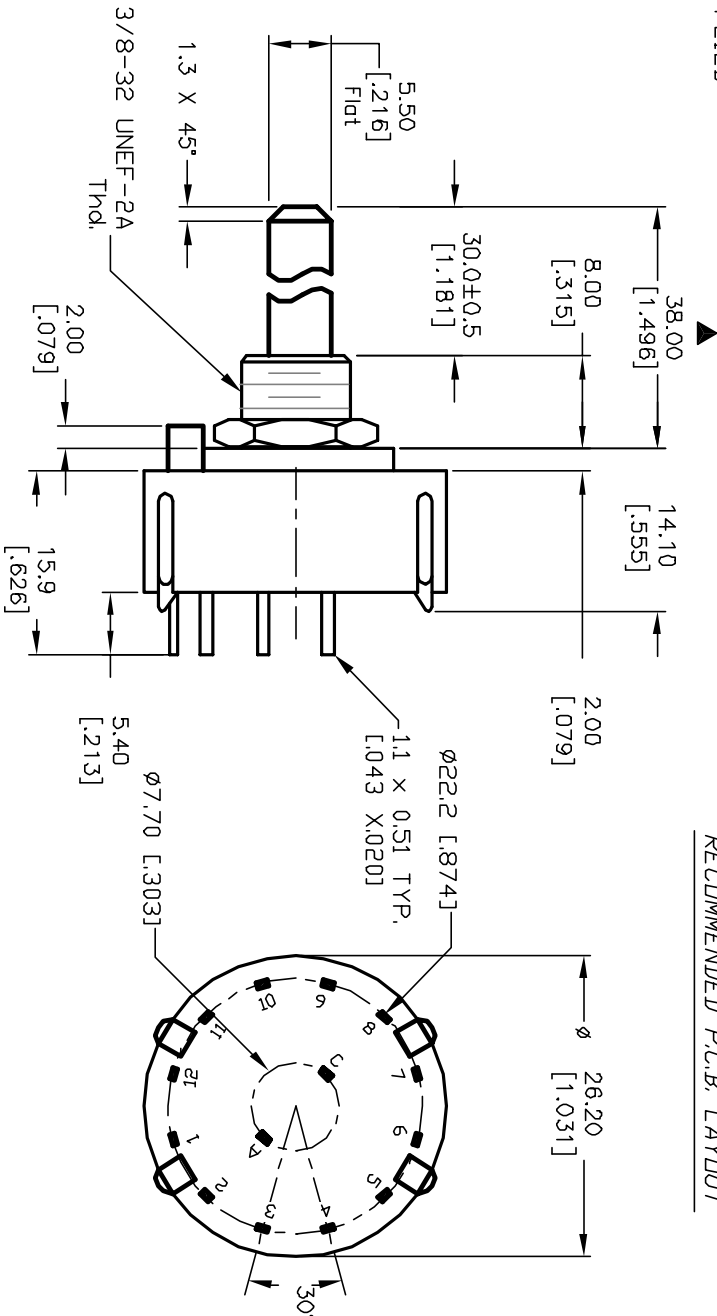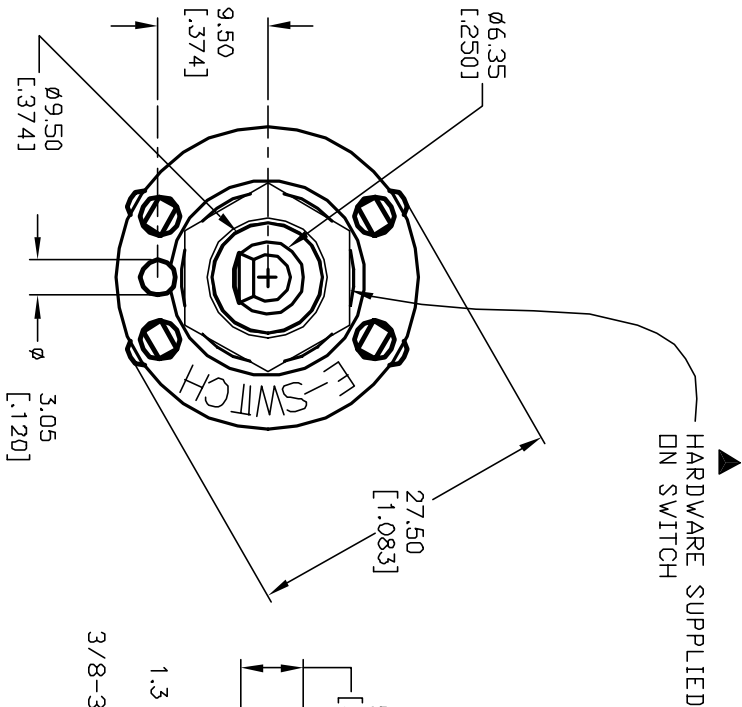

E-SWITCH®

B	12821	REV DESC. PER NEW CATALOG	2/18/03	CJB
A	11276	RELEASED FOR PRODUCTION	3/2/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND ITS NOT TO BE COPIED OR TRANSFERRED				

TITLE	SCALE	DATE	DR	DWG	REV
KC-26-A-(30.0mm) 01-N-P-S	1.5:1	3/2/01	CJB	G510450	B