


(2,54mm) .100"

PHT SERIES

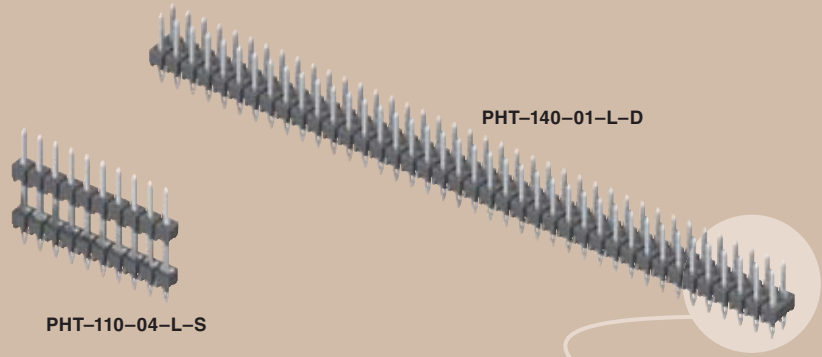

PRESS FIT .025" SQ POST HEADER

SPECIFICATIONS

For complete specifications see www.samtec.com?PHT

Insulator Material:

Liquid Crystal
Polymer

Contact Material:

Phosphor Bronze

Plating:

Au or Sn over 50µ"

(1,27µm) Ni

Current Rating:

2.9A @ 30°C temperature rise

Operating Temp Range:

-55°C to +125°C with Gold

RoHS Compliant:



Yes

Processing:


Contact ipg@samtec.com

Mates with:

SSW, SSQ, ESW, ESQ,
BCS, BSW, IDSD, IDSS,
CES, SLW, PHF, SSM,
CLH

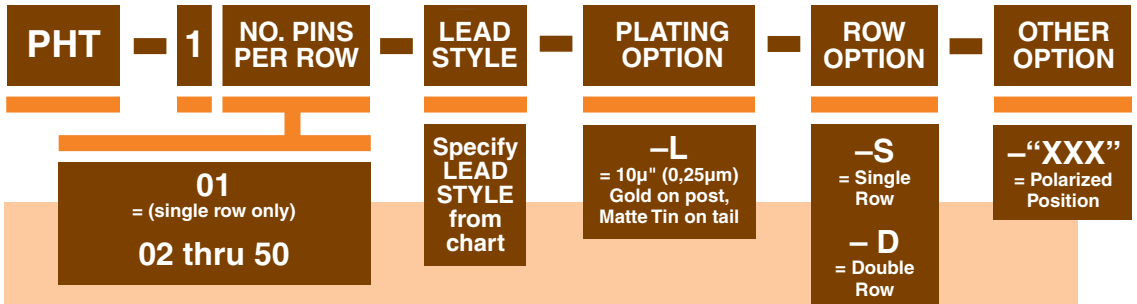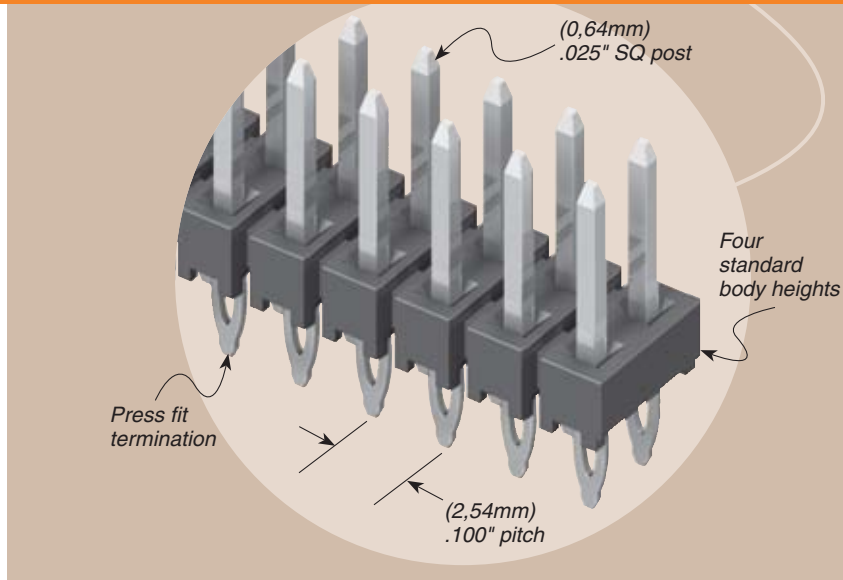

| LEAD STYLE | A |
|------------|--------------|
| -01 | (2,54) .100 |
| -02 | (5,08) .200 |
| -03 | (7,62) .300 |
| -04 | (10,16) .400 |

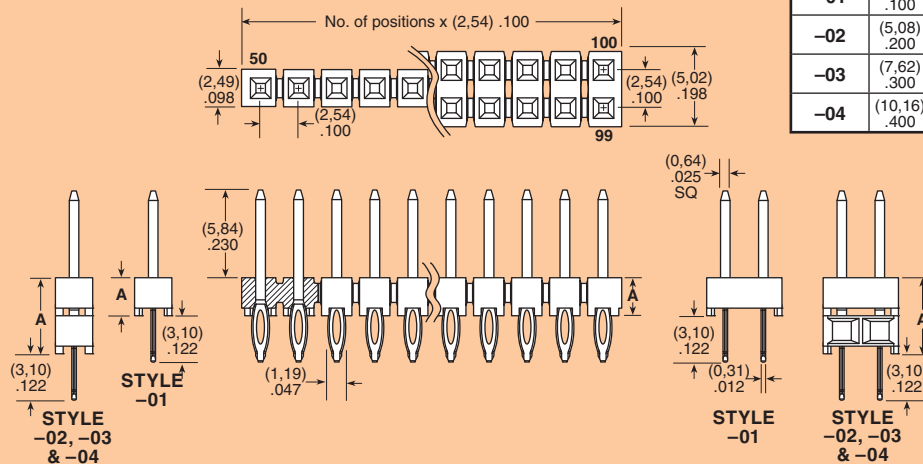

ALSO AVAILABLE

- Other plating options.
- Press fit tooling available. Call Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM