



UK1398

Power MOSFET

N-CHANNEL MOSFET FOR HIGH SPEED SWITCHING



DESCRIPTION

The UTC **UK1398** uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use as a load switch or in PWM applications.

FEATURES

- * $R_{DS(ON)} < 22\Omega$ @ $V_{GS} = 2.5V$
- * $R_{DS(ON)} < 14\Omega$ @ $V_{GS} = 4V$
- * Low capacitance
- * Low gate charge
- * Fast switching capability
- * Avalanche energy specified

SYMBOL

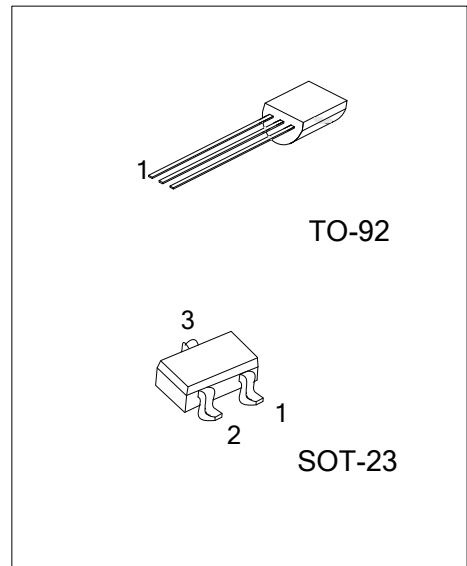

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UK1398L-AE3-R	UK1398G-AE3-R	SOT-23	S	D	G	Tape Reel
UK1398L-T92-B	UK1398G-T92-B	TO-92	S	D	G	Tape Box
UK1398L-T92-K	UK1398G-T92-K	TO-92	S	D	G	Bulk
UK1398L-T92-R	UK1398G-T92-R	TO-92	S	D	G	Tape Reel

UK1398L-AE3-R (1) Packing Type (2) Package Type (3) Lead Free		(1) B: Tape Box, K: Bulk, R: Tape Reel (2) AE3: SOT-23, T92: TO-92 (3) G: Halogen Free, L: Lead Free
---	--	---

■ **ABSOLUTE MAXIMUM RATINGS** (Ta = 25°C)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	50	V
Gate-Source Voltage		V_{GSS}	± 7.0	V
Continuous Drain Current	DC	I_D	± 100	mA
	Pulse(Note 2)		± 200	mA
Power Dissipation	SOT-23	P_D	200	mW
	TO-92		625	
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-55 ~ +150	°C

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.






Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Pulse width ≤ 10 ms, Duty cycle $\leq 50\%$

■ **ELECTRICAL CHARACTERISTICS** (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	50			V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =50V, V _{GS} =0V			10	μA
Gate-Source Leakage Current	I _{GSS}	V _{GS} =±7.0V, V _{DS} =0 V			±5.0	μA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	1.0		3.0	V
	V _{GS(OFF)}	V _{DS} =3.0V, I _D =1.0μA	0.6	1.2	1.5	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} =2.5V, I _D =10mA		22	40	Ω
		V _{GS} =4.0V, I _D =10mA		14	20	Ω
Forward Transconductance	g _{FS}	V _{DS} =3.0V, I _D =10mA	20	38		mS
DYNAMIC PARAMETERS						
Input Capacitance	C _{ISS}	V _{DS} =3.0V, V _{GS} =0V, f=1MHz		8		pF
Output Capacitance	C _{OSS}			7		pF
Reverse Transfer Capacitance	C _{RSS}			3		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time	t _{D(ON)}	V _{DD} =3.0V, I _D =20mA, V _{GS(ON)} =3.0V, R _G =10Ω, R _L =150 Ω		15		ns
Turn-ON Rise Time	t _R			100		ns
Turn-OFF Delay Time	t _{D(OFF)}			30		ns
Turn-OFF Fall-Time	t _F			35		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Diode Forward Voltage	V _{SD}	I _S =1A, V _{GS} =0V			1.3	V

■ TYPICAL CHARACTERISTICS

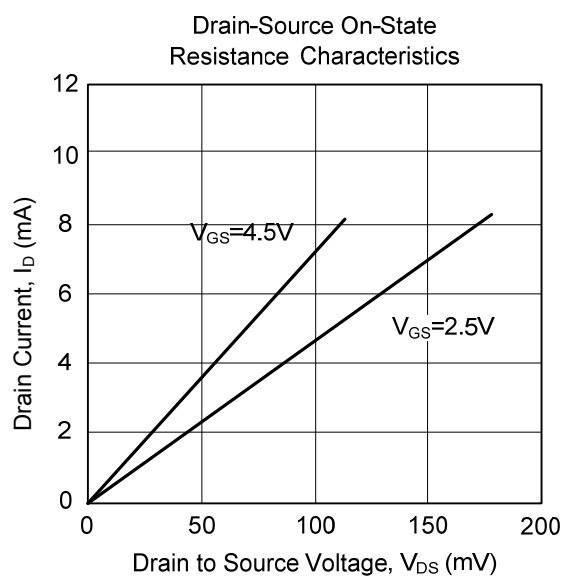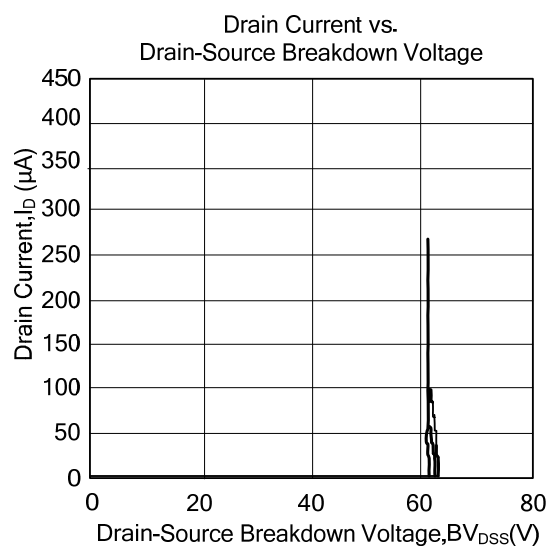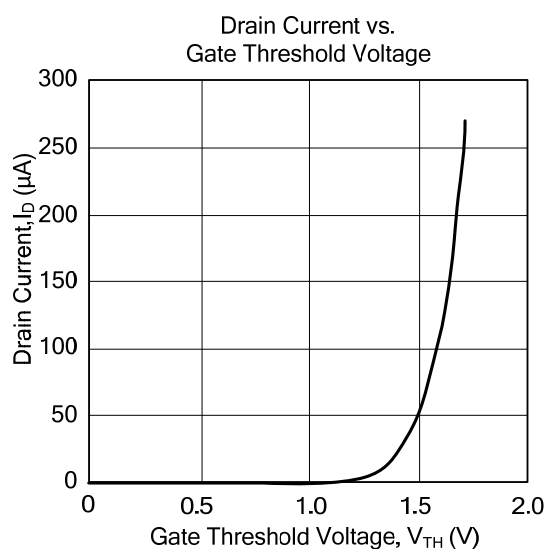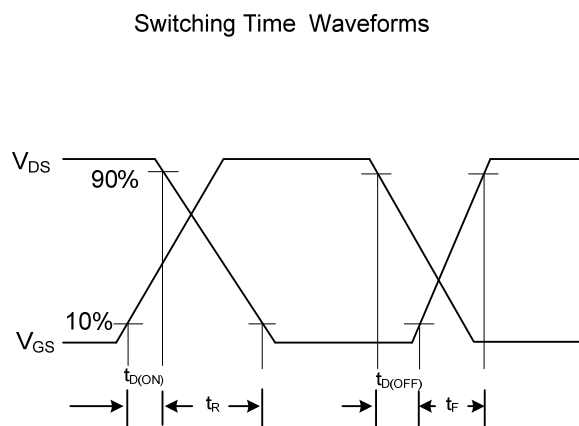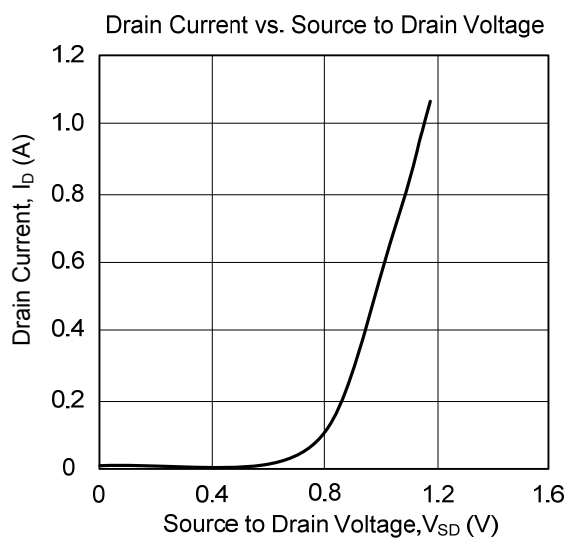

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.