


Solid Tantalum Chip Capacitors Conformal Coated



FEATURES

- Eight standard case codes, "pad compatible" with MIL-PRF-55365/4 (CWR06)
- High volumetric efficiency (Up to 200 000 CV per cubic inch)
- Low profile, conformal-coated construction
- 100 % low impedance power burn-in at + 85 °C
- Low ESR in high frequency applications
- Packaging in 50 unit 'Blister-Pack' trays or 8 mm or 12 mm tape and reel
- Gold plated or solder dipped terminations
- Type CC/EC capacitors are commercial equivalents of 49BC/EC

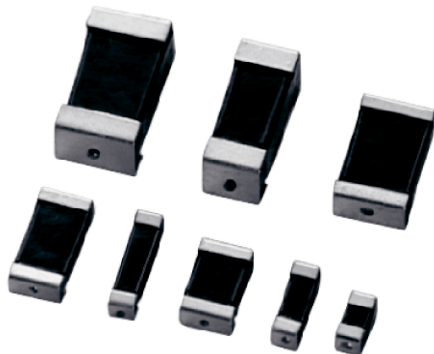

Available
RoHS*
COMPLIANT

APPLICATIONS

- Medical
- Aerospace
- Military Hybrids

ORDERING INFORMATION						
CC	685	H	035	K	X	S
SERIES	CAPACITANCE	CASE CODE	RATED VOLTAGE AT 85 °C	CAPACITANCE TOLERANCE	PACKAGING	TERMINATION FINISH
CC = Standard Range EC = Extended Range	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	See Table		J = ± 5 % K = ± 10 % M = ± 20 %	B = Bulk tray (50 pcs.) T = Tape and reel X = Requires internal spec.	G = Gold plated (RoHS compliant) S = Solder dipped
Example: CC685H035KBS						

DIMENSIONS in inches [millimeters]							
	CASE CODE	LENGTH L	WIDTH W	HEIGHT H	SPACING TYPICAL S	PAD WIDTH B	TYPICAL WEIGHT (Grams)
	A	0.100 ± 0.015 [2.54 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.04 [1.02]	0.030 ± 0.005 [0.76 ± 0.13]	0.02
	B	0.150 ± 0.015 [3.81 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.09 [2.29]	0.030 ± 0.005 [0.76 ± 0.13]	0.03
	C	0.200 ± 0.015 [5.08 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.14 [3.55]	0.030 ± 0.005 [0.76 ± 0.13]	0.04
	D	0.150 ± 0.015 [3.81 ± 0.38]	0.100 ± 0.015 [2.54 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.09 [2.29]	0.030 ± 0.005 [0.76 ± 0.13]	0.07
	E	0.200 ± 0.015 [5.08 ± 0.38]	0.100 ± 0.015 [2.54 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.14 [3.56]	0.030 ± 0.005 [0.76 ± 0.13]	0.09
	F	0.220 ± 0.015 [5.59 ± 0.38]	0.135 ± 0.015 [3.43 ± 0.38]	0.070 ± 0.015 [1.78 ± 0.38]	0.16 [4.06]	0.030 ± 0.005 [0.76 ± 0.13]	0.21
	G	0.265 ± 0.015 [6.73 ± 0.38]	0.110 ± 0.015 [2.79 ± 0.38]	0.110 ± 0.015 [2.79 ± 0.38]	0.165 [4.19]	0.050 ± 0.005 [1.27 ± 0.13]	0.33
	H	0.285 ± 0.015 [7.25 ± 0.38]	0.150 ± 0.015 [3.81 ± 0.38]	0.110 ± 0.015 [2.79 ± 0.38]	0.185 [4.70]	0.050 ± 0.005 [1.27 ± 0.13]	0.50

Notes:

1. For polarity identification, when chip is in mounting position, bare metal clip and weld stub are positive. Top surface of the negative terminal is blue.
2. Anode Riser (weld stub) may extend case size length dimension by 0.015" [0.381] maximum.
3. Dimensions given are for gold plated terminations. For solder dipped terminations, add 0.015" [0.381] to dimension tolerances.
4. Spacing dimension is average distance between chip mounting terminations and therefore maximum distance between mounting pads on substrate.

* Pb containing terminations are not RoHS compliant, exemptions may apply



Solid Tantalum Chip Capacitors
Conformal Coated

Vishay Sprague

RATINGS AND CASE CODES									
μF	pF Code	4 V	6 V	10 V	15 V	20 V	25 V*	35 V*	50 V*
0.10	104	A	A	A	A	A	A	A	A
0.15	154	A	A	A	A	A	A	A	A
0.22	224	A	A	A	A	A	A	A	B
0.33	334	A	A	A	A	A	A	B	B
0.47	474	A	A	A	A	A	A, B	A, B	C
0.68	684	A	A	A	A	B	B	C	D
1.0	105	A	A	A	A, B	A, B	A, C	B, D	E
1.5	155	A	A	A, B	A, B	A, C	B, D	C, E	F
2.2	225	A	A, B	A, B	A, C	B, D	C, E	D, F	F
3.3	335	A, B	A, B	A, C	B, D	C, E	D, F	E, F	G
4.7	475	A, B	A, C	B, D	C, E	D, F	E, F	F, G	H
6.8	685	A, C	B, D	C, E	D, F	E, F	F, G	H, F	-
10	106	B, D	C, E	D, F	E, F	F, G	F, G	G	-
15	156	C, E	D, F	E, F	F, G	F, G	F, H	H	-
22	226	D, F	E, F	F, G	F, G	F, H	G	-	-
33	336	E, F	F, G	F, G	F, H	G	H	-	-
47	476	F, G	F, G	F, H	G	H	-	-	-
68	686	F, G	F, H	G	H	-	-	-	-
100	107	F, H	G	H	-	-	-	-	-
120	127	G	G	-	-	-	-	-	-
150	157	G	H	-	-	-	-	-	-
220	227	H	-	-	-	-	-	-	-

Note: *Preliminary values, contact factory for availability.

STANDARD RATINGS - TYPE CC						
CAP (μF)	CASE CODE	25 °C DCL μA	85 °C DCL μA	125 °C DCL μA	DF (%)	ESR Ω
4 WVDC AT - 55 °C TO + 85 °C, SURGE = 5 V						
2.2	A	0.5	5.0	7.0	6.0	8.0
4.7	B	0.5	5.0	7.0	6.0	5.5
6.8	C	0.5	5.0	7.0	6.0	3.5
10	D	0.5	5.0	7.0	8.0	2.0
15	E	0.6	6.0	8.0	8.0	1.5
33	F	1.4	14.0	18.0	8.0	1.0
68	G	2.8	28.0	35.0	10.0	0.8
100	H	4.0	40.0	48.0	10.0	0.5
6 WVDC AT - 55 °C TO + 85 °C, SURGE = 8 V						
1.5	A	0.5	5.0	7.0	6.0	8.0
3.3	B	0.5	5.0	7.0	6.0	5.5
4.7	C	0.5	5.0	7.0	6.0	3.5
6.8	D	0.5	5.0	7.0	6.0	2.0
10	E	0.6	6.0	8.0	8.0	1.5
22	F	1.4	14.0	18.0	8.0	1.0
47	G	2.9	29.0	36.0	10.0	0.8
68	H	4.0	40.0	48.0	10.0	0.7
10 WVDC AT - 55 °C TO + 85 °C, SURGE = 13 V						
1.0	A	0.5	5.0	7.0	6.0	9.0
2.2	B	0.5	5.0	7.0	6.0	5.5
3.3	C	0.5	5.0	7.0	6.0	3.5
4.7	D	0.5	5.0	7.0	6.0	2.0
6.8	E	0.7	7.0	9.0	6.0	2.0
15	F	1.5	15.0	19.0	8.0	1.0
33	G	3.0	30.0	36.0	10.0	0.8
47	H	4.7	47.0	59.0	10.0	0.7
15 WVDC AT - 55 °C TO + 85 °C, SURGE = 20 V						
0.68	A	0.5	5.0	7.0	6.0	10.0
1.5	B	0.5	5.0	7.0	6.0	6.0
2.2	C	0.5	5.0	7.0	6.0	4.0
3.3	D	0.5	5.0	7.0	6.0	2.5
4.7	E	0.8	8.0	10.0	6.0	2.5
10	F	1.5	15.0	19.0	6.0	1.5
22	G	3.3	33.0	42.0	8.0	1.0
33	H	5.0	50.0	60.0	8.0	0.8
10 WVDC AT + 125 °C, SURGE = 12 V						

STANDARD RATINGS - TYPE CC						
CAP (µF)	CASE CODE	25 °C DCL µA	85 °C DCL µA	125 °C DCL µA	DF (%)	ESR Ω
20 WVDC AT - 55 °C TO + 85 °C, SURGE = 26 V			13 WVDC AT + 125 °C, SURGE = 16 V			
0.47	A	0.5	5.0	7.0	6.0	12.0
0.68	B	0.5	5.0	7.0	6.0	8.0
1.0	B	0.5	5.0	7.0	6.0	8.0
1.5	C	0.5	5.0	7.0	6.0	6.0
2.2	D	0.5	5.0	7.0	6.0	3.5
3.3	E	0.7	7.0	9.0	6.0	3.0
6.8	F	1.4	14.0	18.0	6.0	2.5
15	G	3.0	30.0	36.0	6.0	1.0
22	H	4.0	40.0	48.0	6.0	1.0
*25 WVDC AT - 55 °C TO + 85 °C, SURGE = 32 V			17 WVDC AT + 125 °C, SURGE = 22 V			
0.33	A	0.5	5.0	7.0	6.0	15.0
0.68	B	0.5	5.0	7.0	6.0	10.0
1.0	C	0.5	5.0	7.0	6.0	6.5
1.5	D	0.5	5.0	7.0	6.0	5.0
2.2	E	0.6	6.0	8.0	6.0	3.5
4.7	F	1.2	12.0	15.0	6.0	2.5
6.8	G	1.7	17.0	22.0	6.0	1.2
10	G	2.5	25.0	32.0	6.0	1.4
15	H	3.8	38.0	48.0	6.0	1.0
*35 WVDC AT - 55 °C TO + 85 °C, SURGE = 46 V			23 WVDC AT + 125 °C, SURGE = 28 V			
0.22	A	0.5	5.0	7.0	6.0	18.0
0.47	B	0.5	5.0	7.0	6.0	12.0
0.68	C	0.5	5.0	7.0	6.0	9.0
1.0	D	0.5	5.0	7.0	6.0	6.0
1.5	E	0.6	6.0	8.0	6.0	4.5
3.3	F	1.0	10.0	12.0	6.0	2.5
4.7	G	1.7	17.0	22.0	6.0	1.5
6.8	H	2.4	24.0	30.0	6.0	1.3
*50 WVDC AT - 55 °C TO + 85 °C, SURGE = 65 V			33 WVDC AT + 125 °C, SURGE = 40 V			
0.10	A	0.5	5.0	7.0	6.0	20.0
0.15	A	0.5	5.0	7.0	6.0	20.0
0.22	B	0.5	5.0	7.0	6.0	15.0
0.33	B	0.5	5.0	7.0	6.0	12.0
0.47	C	0.5	5.0	7.0	6.0	8.0
0.68	D	0.5	5.0	7.0	6.0	7.0
1.0	E	0.5	5.0	7.0	6.0	6.0
1.5	F	0.8	8.0	10.0	6.0	4.0
2.2	F	1.1	11.0	14.0	6.0	2.5
3.3	G	1.7	17.0	22.0	6.0	2.0
4.7	H	2.4	24.0	30.0	6.0	2.0

Note: *Preliminary values, contact factory for availability

STANDARD RATINGS - TYPE EC						
CAP (µF)	CASE CODE	25 °C DCL µA	85 °C DCL µA	125 °C DCL µA	DF (%)	ESR Ω
4 WVDC AT - 55 °C TO + 85 °C, SURGE = 5 V			2.7 WVDC AT + 125 °C, SURGE = 3.4 V			
6.8	A	0.5	5.0	6.0	6.0	3.5
10	B	0.5	5.0	6.0	8.0	2.0
15	C	0.6	6.0	8.0	8.0	1.5
22	D	0.9	9.0	11.0	8.0	1.0
33	E	1.4	14.0	17.0	8.0	1.0
100	F	4.0	40.0	48.0	10.0	0.5
150	G	6.0	60.0	72.0	10.0	0.5
220	H	9.0	90.0	108.0	10.0	0.5
6 WVDC AT - 55 °C TO + 85 °C, SURGE = 8 V			4 WVDC AT + 125 °C, SURGE = 5 V			
4.7	A	0.5	5.0	6.0	6.0	3.5
6.8	B	0.5	5.0	6.0	6.0	2.0
10	C	0.6	6.0	8.0	8.0	1.5
15	D	0.9	9.0	11.0	8.0	1.0
22	E	1.4	14.0	17.0	8.0	1.0
68	F	4.0	40.0	48.0	10.0	0.7
120	G	8.0	80.0	96.0	10.0	0.5
150	H	9.0	90.0	108.0	10.0	0.5



Solid Tantalum Chip Capacitors
Conformal Coated

Vishay Sprague

STANDARD RATINGS - TYPE EC						
CAP (μF)	CASE CODE	25 °C DCL μA	85 °C DCL μA	125 °C DCL μA	DF (%)	ESR Ω
10 WVDC AT - 55 °C TO + 85 °C, SURGE = 13 V			7 WVDC AT + 125 °C, SURGE = 9 V			
3.3	A	0.5	5.0	6.0	6.0	3.5
4.7	B	0.5	5.0	6.0	6.0	2.0
6.8	C	0.7	7.0	9.0	6.0	2.0
10	D	1.0	10.0	12.0	8.0	1.5
15	E	1.5	15.0	18.0	8.0	1.0
47	F	4.7	47.0	57.0	10.0	0.7
68	G	7.0	70.0	84.0	10.0	0.7
100	H	10.0	100.0	120.0	10.0	0.5
15 WVDC AT - 55 °C TO + 85 °C, SURGE = 20 V			10 WVDC AT + 125 °C, SURGE = 12 V			
2.2	A	0.5	5.0	6.0	6.0	4.0
3.3	B	0.5	5.0	6.0	6.0	2.5
4.7	C	0.8	8.0	10.0	6.0	2.5
6.8	D	1.0	10.0	12.0	6.0	2.0
10	E	1.5	15.0	18.0	6.0	1.5
33	F	5.0	50.0	60.0	8.0	0.8
47	G	8.0	80.0	96.0	8.0	0.8
68	H	11.0	110.0	132.0	8.0	0.8
20 WVDC AT - 55 °C TO + 85 °C, SURGE = 26 V			13 WVDC AT + 125 °C, SURGE = 16 V			
1.5	A	0.5	5.0	6.0	6.0	6.0
2.2	B	0.5	5.0	6.0	6.0	3.5
3.3	C	0.7	7.0	9.0	6.0	3.0
4.7	D	1.0	10.0	12.0	6.0	2.5
6.8	E	1.4	14.0	17.0	6.0	2.0
22	F	4.0	40.0	48.0	6.0	1.0
33	G	7.0	70.0	84.0	6.0	1.0
47	H	10.0	100.0	120.0	6.0	1.0
*25 WVDC AT - 55 °C TO + 85 °C, SURGE = 32 V			17 WVDC AT + 125 °C, SURGE = 22 V			
1.0	A	0.5	5.0	6.0	6.0	8.0
1.5	B	0.5	5.0	6.0	6.0	5.0
2.2	C	0.6	6.0	8.0	6.0	3.5
3.3	D	0.9	9.0	11.0	6.0	3.5
4.7	E	1.2	12.0	15.0	6.0	2.5
10	F	2.5	25.0	30.0	6.0	2.0
15	F	3.8	38.0	46.0	6.0	1.0
22	G	6.0	60.0	72.0	6.0	1.0
33	H	9.0	90.0	108.0	6.0	1.0
*35 WVDC AT - 55 °C TO + 85 °C, SURGE = 46 V			23 WVDC AT + 125 °C, SURGE = 28 V			
0.47	A	0.5	5.0	6.0	6.0	12.0
1.0	B	0.5	5.0	6.0	6.0	6.0
1.5	C	0.6	6.0	8.0	6.0	5.0
2.2	D	0.8	8.0	10.0	6.0	3.5
3.3	E	1.0	10.0	12.0	6.0	2.5
4.7	F	1.7	17.0	20.0	6.0	2.5
6.8	F	2.4	24.0	29.0	6.0	2.0
10	G	4.0	40.0	48.0	6.0	2.0
15	H	6.0	60.0	72.0	6.0	2.0

Note: *Preliminary values, contact factory for availability



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.