


# PANEL MOUNT LEDs

IN INDUSTRY STANDARD PACKAGE STYLES

**LEDTRONICS**  
MORE CHOICE, MORE LIGHT


## 1/2 (12.7mm) SNAP-IN LEDs

COLOR	LEDTRONICS LED PART NO	mA	Vf	Iv mcd
RED	PFS50CR5-2Vf-W6	20	2.0/NR	40
YELLOW	PFS50CY5-2Vf-W6	20	2.0/NR	40
GREEN	PFS50CG5-2Vf-W6	20	2.0/NR	40
RED	PFS50CR5-5V-W6	20	5.0	40
YELLOW	PFS50CY5-5V-W6	20	5.0	40
GREEN	PFS50CG5-5V-W6	20	5.0	40
RED	PFS50CR5-6V-W6	20	6.0	40
YELLOW	PFS50CY5-6V-W6	20	6.0	40
GREEN	PFS50CG5-6V-W6	20	6.0	40
RED	PFS50CR5-12V-W6	20	12.0	40
YELLOW	PFS50CY5-12V-W6	20	12.0	40
GREEN	PFS50CG5-12V-W6	20	12.0	40
RED	PFS50CR5-14V-W6	20	14.0	40
YELLOW	PFS50CY5-14V-W6	20	14.0	40
GREEN	PFS50CG5-14V-W6	20	14.0	40
RED	PFS50CR5-24V-W6	20	24.0	40
YELLOW	PFS50CY5-24V-W6	20	24.0	40
GREEN	PFS50CG5-24V-W6	20	24.0	40
RED	PFS50CR5-28V-W6	20	28.0	40
YELLOW	PFS50CY5-28V-W6	20	28.0	40
GREEN	PFS50CG5-28V-W6	20	28.0	40

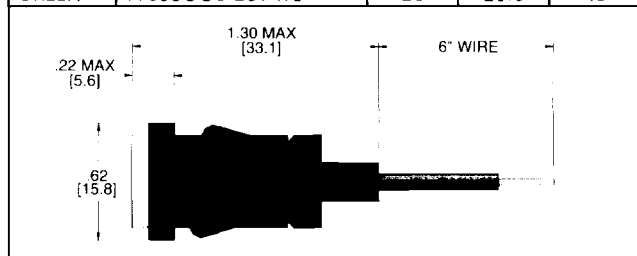

## 1/2 (12.7mm) SNAP-IN LEDs

COLOR	LEDTRONICS LED PART NO	mA	Vf	Iv mcd
RED	PFS50CR5-2Vf-T	20	2.0/NR	40
YELLOW	PFS50CY5-2Vf-T	20	2.0/NR	40
GREEN	PFS50CG5-2Vf-T	20	2.0/NR	40
RED	PFS50CR5-5V-T	20	5.0	40
YELLOW	PFS50CY5-5V-T	20	5.0	40
GREEN	PFS50CG5-5V-T	20	5.0	40
RED	PFS50CR5-6V-T	20	6.0	40
YELLOW	PFS50CY5-6V-T	20	6.0	40
GREEN	PFS50CG5-6V-T	20	6.0	40
RED	PFS50CR5-12V-T	20	12.0	40
YELLOW	PFS50CY5-12V-T	20	12.0	40
GREEN	PFS50CG5-12V-T	20	12.0	40
RED	PFS50CR5-14V-T	20	14.0	40
YELLOW	PFS50CY5-14V-T	20	14.0	40
GREEN	PFS50CG5-14V-T	20	14.0	40
RED	PFS50CR5-24V-T	20	24.0	40
YELLOW	PFS50CY5-24V-T	20	24.0	40
GREEN	PFS50CG5-24V-T	20	24.0	40
RED	PFS50CR5-28V-T	20	28.0	40
YELLOW	PFS50CY5-28V-T	20	28.0	40
GREEN	PFS50CG5-28V-T	20	28.0	40

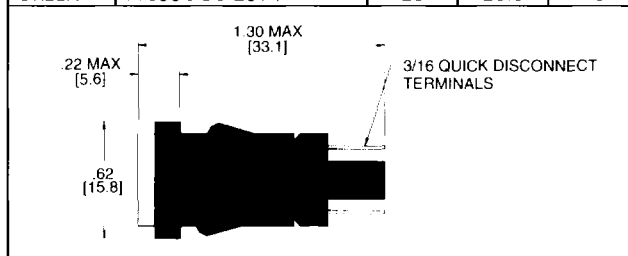

### FEATURES:

1. LONG LIFE (AVERAGE 100,000 HOURS)
2. LOW POWER CONSUMPTION
3. LOW CURRENT DRAW
4. LOW RADIANT HEAT
5. HIGH SHOCK AND VIBRATION RESISTANT
6. COLOR COHERENT LIGHT SOURCE
7. NO CURRENT SURGE
8. FAST TURN ON RESPONSE TIME

### APPLICATION NOTES:

1. OTHER COLORS, VOLTAGES, AND STYLES ARE AVAILABLE.
2. ALL VOLTAGE "V" READINGS ARE TYP.
3. ALL CURRENT "mA" READINGS ARE TYP.
4. MOUNTING DIAMETER: .500" (12.7mm) TO .505" (12.8mm).

### OPTIONAL MOUNTING HARDWARE

