


------

POSITIONIC ASIA PTE. LTD. BELIEVES THE DATA ON THE DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER REMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITIONIC ASIA PTE. LTD. ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	DRN	CKD	APP
25 Feb 09	NC	PA ECO 09036	LP	EH	NK

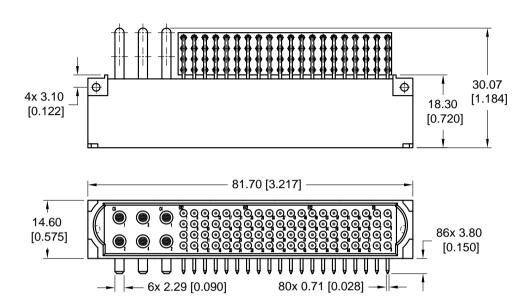





CONTACT HOLES PATTERN
21.95 [0.864] —
2x 5.90 [0.232]
5.85 [0.230]
6.00 [0.236] — 19x 2.70 [0.106] 3x2.70
7.72 $\downarrow \uparrow \downarrow $
[0.304]
<u> </u>
$\sim$ 80x Ø1.14 [Ø0.045] $\sim$ 2x 4.37
$2x \varnothing 2.54 $ $-6x \varnothing 2.90 [\varnothing 0.114]$ [0.172]
[Ø0.100] — 77.50 [3.051] — —

DRAWING					
_	PART NUMBER	REMARKS			
NO.					
ASK21919-1	SP2YETTTJ48M000	-			
		RoHS COMPLIANT PER			
ASK21919-2	SP2YETTTJ48M000/AA	RoHS DIRECTIVE			
		2002/95/EC OF 27 JAN 200			

## PC 3014

## POSITRONIC ASIA PTE. LTD 3014A UBI ROAD 1, #07-01. SINGAPORE 408703

Tel: (65) 6842-1419 / Fax: (65) 6842-1421 / Email: singapore@connectpositronic.cc

NTS

EΗ

Nk

REV.

† *	SERI
GENERAL TOL. LINEAR : ±0.38 [0.015] ANGULAR : ±5°	TITLE
UNI ESS OTHERWISE	

TLE	SP2YETTTJ48M	000
	SP2YFTTT.I48Mi	$\Omega \cap \Omega / \Delta$

SP

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]

## NOTES:

1) MATERIALS AND FINISHES

INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0. COLOR: BLUE. SIGNAL CONTACTS: PRECISION MACHINED COPPER ALLOY WITH GOLD OVER NICKEL PLATE. POWER CONTACTS: HIGH CONDUCTIVITY COPPER ALLOY WITH GOLD FLASH OVER NICKEL.