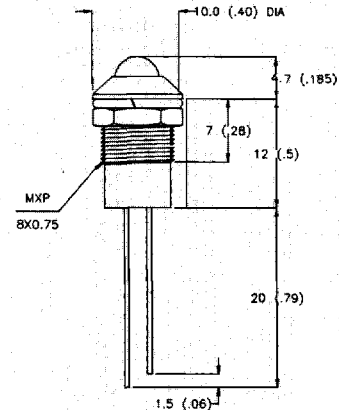

SSI-LXR3816 SERIES T-5mm METAL BEZEL LED INDICATORS

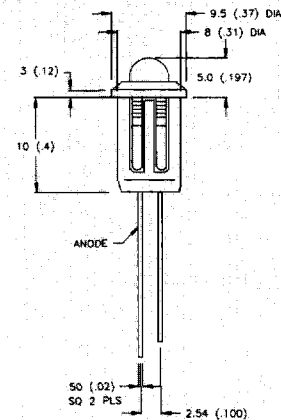
FEATURES		APPLICATIONS			MATERIAL SPECIFICATIONS		
• Easy Panel Installation • Brass Housing • Choice of Colors • Lead Lengths Optional • Optional Black Anodize Finish		• Panel Indicators • Status Indicators • Instrument Indicators • Annunciators			• Holder: Brass/Chrome Finish • Termination: Pins or Insulated • (6") 24AWG Leads (-150) • Installation: 5/16" Panel Hole		
LUMEX PART NBR	EMITTED COLOR	OPERATING	OPERATING	BRIGHTNESS	LED SERIES		
	PEAK(nm)	CURRENT (mA)	TYP Volts (V)	TYP (mCD) @	mA	USED	
SSI-LXR3816ID-150	RED	635	10-25	2.1	15	20 SSL-LX5093XX	
SSI-LXR3816SRD-150	RED	660	10-25	1.7	75	20 SSL-LX5093XX	
SSI-LXR3816GD-150	GREEN	565	10-25	2.1	15	20 SSL-LX5093XX	
SSI-LXR3816YD-150	YELLOW	585	10-25	2.1	15	20 SSL-LX5093XX	
BI-COLOR OPTION							
SSI-LXR3816GHW-150	RED/GREEN	695/565	10-25	2.1	8/8	20 SSL-LX5093HGW	
FIXED VOLTAGE OPTIONS							
SSI-LXR3816ID-5V-150	RED	635	20 max.	5.0	12	5V SSL-LX5093XX-5V	
SSI-LXR3816GD-5V-150	GREEN	565	20 max.	5.0	12	5V SSL-LX5093XX-5V	
SSI-LXR3816YD-5V-150	YELLOW	585	20 max.	5.0	12	5V SSL-LX5093XX-5V	
BLINKING OPTION							
SSI-LXR3816ID-150	RED	635	10-20	3-15V	8	9V SSL-LX5093XX	

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSI-LXR5010 SERIES T-5mm BLACK BEZEL LED INDICATORS

FEATURES		APPLICATIONS			MATERIAL SPECIFICATIONS		
• Easy Panel Installation • Attractive Bezel • Choice of Colors • Lead Lengths Optional		• Panel Indicators • Status Indicators • Instrument Indicators • Annunciators			• Holder: Black ABS • Termination: Pins or Insulated Leads (-150) • Installation: 5/16" Panel Hole		
LUMEX PART NBR	EMITTED COLOR	OPERATING	OPERATING	BRIGHTNESS	LED SERIES		
		PEAK(nm)	CURRENT (mA)			TYP Volts (V)	TYP (mCd) @ mA USED
SSI-LXR5010ID/-150	RED	635	10-25	2.1	16	20	SSL-LX5093XX
SSI-LXR5010RD/-150	RED	660	10-25	1.7	70	20	SSL-LX5093XX
SSI-LXR5010GD/-150	GREEN	565	10-25	2.1	16	20	SSL-LX5093XX
SSI-LXR5010YD/-150	YELLOW	585	10-25	2.1	16	20	SSL-LX5093XX
BI-COLOR OPTION							
SSI-LXR 5010HGW/-150	RED/GREEN	695/565	10-25	2.1	8/8	20	SSL-LX5093HGW
FIXED VOLTAGE OPTIONS							
SSI-LXR5010ID-5V/-150	RED	635	20 max.	5.0	12	5V	SSL-LX5093XX-5V
SSI-LXR5010GD-5V/-150	GREEN	565	20 max.	5.0	12	5V	SSL-LX5093XX-5V
SSI-LXR5010YD-5V/150	YELLOW	585	20 max.	5.0	12	5V	SSL-LX5093XX-5V
BLINKING OPTION							
SSI-LXR5010BD/-150	RED	635	10-20	3-15V	8	9V	SSL-LX5093BXX

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSI-LXR5020 SERIES T-5mm BLACK BEZEL LED INDICATORS

FEATURES		APPLICATIONS			MATERIAL SPECIFICATIONS		
• Easy Panel Installation • Attractive Bezel • Choice of Colors • Lead Lengths Optional		• Panel Indicators • Status Indicators • Instrument Indicators • Annunciators			• Holder: Black ABS • Termination: Pins or Insulated Leads (150) • Installation: 5/16" Panel Hole		
LUMEX PART NBR	EMITTED COLOR	OPERATING	OPERATING	BRIGHTNESS	LED SERIES		
		PEAK(nm)	CURRENT (mA)	TYP Volts (V)	TYP (mCD) @	mA USED	
SSI-LXR5020ID-150	RED	635	10-25	2.1	16	20 SSL-LX5093XX	
SSI-LXR5020SRD-150	RED	660	10-25	1.7	70	20 SSL-LX5093XX	
SSI-LXR5020GD-150	GREEN	565	10-25	2.1	16	20 SSL-LX5093XX	
SSI-LXR5020YD-150	YELLOW	585	10-25	2.1	16	20 SSL-LX5093XX	
BI-COLOR OPTION							
SSI-LXR 5020HGW-150	RED/GREEN	695/565	10-25	2.1	8/8	20 SSL-LX5 093HGW	
FIXED VOLTAGE OPTIONS							
SSI-LXR5020ID-5V-150	RED	635	20 max.	5.0	12	5V SSL-LX5093XX-5V	
SSI-LXR5020GD-5V-150	GREEN	565	20 max.	5.0	12	5V SSL-LX5093XX-5V	
SSI-LXR5020YD-5V/150	YELLOW	585	20 max.	5.0	12	5V SSL-LX5093XX-5V	
BLINKING OPTION							
SSI-LXR5020BD-150	RED	635	10-20	3-15V	8	9V SSL-LX5093BX	

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm
