


## International Power Transformer

### Series: VDE - Printed Circuit Mount, Full Shroud


- Power Rating 25VA to 56VA
- Single or Dual Primary, 115V, 230V or 115/230V
- Frequency 50/60Hz
- Series or Parallel Secondary
- Dielectric Strength – 4000 Vrms
- Insulation Class F (155°C)
- Flammability Rating – Bobbin/Shroud UL94V0 or 94H-B

Transformer meets international safety standards by providing high isolation, creepage, clearance, and increased flammability ratings. Use in low power applications.

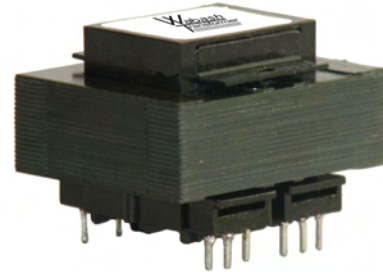

### Agency Approvals:

- UL/cUL 5085-2 Recognized (File E47299)
- VDE Licensed (File 40001595)
- UL/cUL 5085-3 Class 2 Recognized (File E49606)
- UL 6500 Audio/Video Recognized (File E210114)
- Insulation File No. E95662

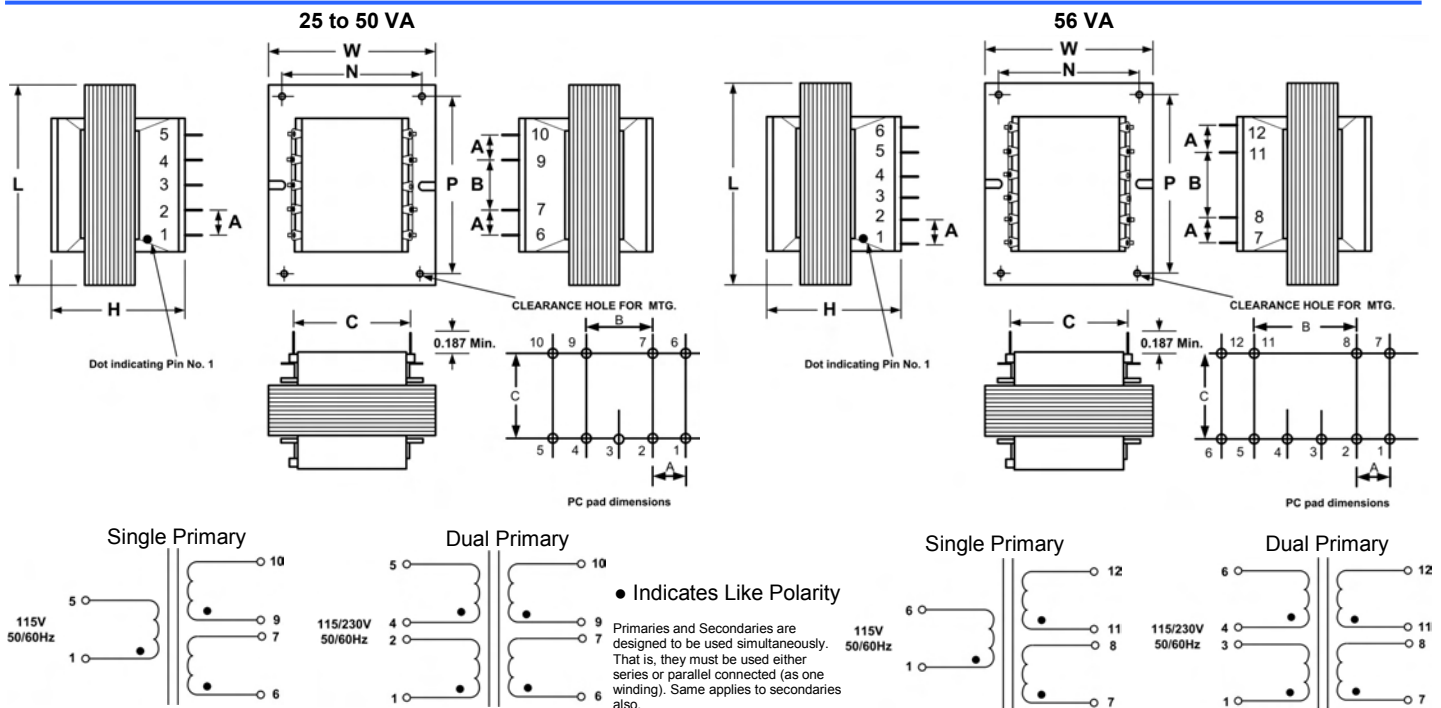

VA Rating	Dimensions (Inches)						Pin Dim. W X THK.	Mounting Dim.		Mtg. Screw		Weight lbs
	L	W	H	A	B	C		N	P	Size	Qty	
25	2.25	1.87	1.96	0.300	0.600	1.22	0.06 X 0.02	1.50	1.875	#4	2	1.10
30	2.25	1.87	1.96	0.300	0.600	1.22	0.06 X 0.02	1.50	1.875	#4	2	1.15
40	2.62	2.18	1.94	0.300	0.600	1.40	0.06 X 0.02	1.75	2.188	#6	4	1.36
43	2.62	2.18	2.07	0.300	0.600	1.40	0.06 X 0.02	1.75	2.188	#6	4	1.64
50	2.62	2.18	2.32	0.300	0.600	1.50	0.06 X 0.02	1.75	2.188	#6	4	1.85
56	3.00	2.50	2.18	0.300	0.900	1.59	0.06 X 0.02	2.00	2.580	#6	4	2.09

Any application, Any requirement, Contact us for our Custom Designs



**Series: VDE - Printed Circuit Mount, Full Shroud**

**Partial Selection Guide**

All models are VDE approved

VA	Part Number			Secondary		Class 2
	115/230V	115V	230V	Series	Parallel	
25	VDE-25P-10	VDE1-25P-10	VDE2-25P-10	10VCT @ 2.50A	5V @ 5.0A	✓
	VDE-25P-126	VDE1-25P-126	VDE2-25P-126	12.6VCT @ 1.98A	6.3V @ 3.96A	✓
	VDE-25P-16	VDE1-25P-16	VDE2-25P-16	16VCT @ 1.56A	8V @ 3.12A	✓
	VDE-25P-18	VDE1-25P-18	VDE2-25P-18	18VCT @ 1.39A	9V @ 2.78A	✓
	VDE-25P-20	VDE1-25P-20	VDE2-25P-20	20VCT @ 1.25A	10V @ 2.50A	✓
	VDE-25P-24	VDE1-25P-24	VDE2-25P-24	24VCT @ 1.04A	12V @ 2.08A	✓
	VDE-25P-28	VDE1-25P-28	VDE2-25P-28	28VCT @ 892mA	14V @ 1.78A	-
30	VDE-30P-10	VDE1-30P-10	VDE2-30P-10	10VCT @ 3.0A	5V @ 6.0A	-
	VDE-30P-126	VDE1-30P-126	VDE2-30P-126	12.6VCT @ 2.38A	6.3V @ 4.76A	✓
	VDE-30P-16	VDE1-30P-16	VDE2-30P-16	16VCT @ 1.87A	8V @ 3.74A	✓
	VDE-30P-18	VDE1-30P-18	VDE2-30P-18	18VCT @ 1.66A	9V @ 3.33A	✓
	VDE-30P-20	VDE1-30P-20	VDE2-30P-20	20VCT @ 1.5A	10V @ 3.0A	✓
	VDE-30P-24	VDE1-30P-24	VDE2-30P-24	24VCT @ 1.25A	12V @ 2.5A	✓
	VDE-30P-28	VDE1-30P-28	VDE2-30P-28	28VCT @ 1.07A	14V @ 2.14A	-
40	VDE-40P-10	VDE1-40P-10	VDE2-40P-10	10VCT @ 4.0A	5V @ 8.00A	-
	VDE-40P-126	VDE1-40P-126	VDE2-40P-126	12.6VCT @ 3.17A	6.3V @ 6.34A	✓
	VDE-40P-16	VDE1-40P-16	VDE2-40P-16	16VCT @ 2.5A	8V @ 5.00A	✓
	VDE-40P-18	VDE1-40P-18	VDE2-40P-18	18VCT @ 2.22A	9V @ 4.44A	✓
	VDE-40P-20	VDE1-40P-20	VDE2-40P-20	20VCT @ 2.0A	10V @ 4.00A	✓
	VDE-40P-24	VDE1-40P-24	VDE2-40P-24	24VCT @ 1.66A	12V @ 3.33A	✓
	VDE-40P-28	VDE1-40P-28	VDE2-40P-28	28VCT @ 1.42A	14V @ 2.84A	-
43	VDE-43P-10	VDE1-43P-10	VDE2-43P-10	10VCT @ 4.30A	5V @ 8.60A	-
	VDE-43P-126	VDE1-43P-126	VDE2-43P-126	12.6VCT @ 3.41A	6.3V @ 6.82A	✓
	VDE-43P-16	VDE1-43P-16	VDE2-43P-16	16VCT @ 2.68A	8V @ 5.38A	✓
	VDE-43P-18	VDE1-43P-18	VDE2-43P-18	18VCT @ 2.38A	9V @ 4.77A	✓
	VDE-43P-20	VDE1-43P-20	VDE2-43P-20	20VCT @ 2.15A	10V @ 4.30A	✓
	VDE-43P-24	VDE1-43P-24	VDE2-43P-24	24VCT @ 1.79A	12V @ 3.58A	-
	VDE-43P-28	VDE1-43P-28	VDE2-43P-28	28VCT @ 1.53A	14V @ 3.07A	-
50	VDE-50P-10	VDE1-50P-10	VDE2-50P-10	10VCT @ 5.0A	5V @ 10.0A	-
	VDE-50P-126	VDE1-50P-126	VDE2-50P-126	12.6VCT @ 3.96A	6.3V @ 7.93A	-
	VDE-50P-16	VDE1-50P-16	VDE2-50P-16	16VCT @ 3.12A	8V @ 6.25A	-
	VDE-50P-18	VDE1-50P-18	VDE2-50P-18	18VCT @ 2.77A	9V @ 5.55A	-
	VDE-50P-20	VDE1-50P-20	VDE2-50P-20	20VCT @ 2.50A	10V @ 5.0A	✓
	VDE-50P-24	VDE1-50P-24	VDE2-50P-24	24VCT @ 2.08A	12V @ 4.16A	✓
	VDE-50P-28	VDE1-50P-28	VDE2-50P-28	28VCT @ 1.78A	14V @ 3.56A	-
56	VDE-56P-10	VDE1-56P-10	VDE2-56P-10	10VCT @ 5.6A	5V @ 11.2A	-
	VDE-56P-126	VDE1-56P-126	VDE2-56P-126	12.6VCT @ 4.44A	6.3V @ 8.88A	-
	VDE-56P-16	VDE1-56P-16	VDE2-56P-16	16VCT @ 3.50A	8V @ 7.00A	-
	VDE-56P-18	VDE1-56P-18	VDE2-56P-18	18VCT @ 3.11A	9V @ 6.22A	-
	VDE-56P-20	VDE1-56P-20	VDE2-56P-20	20VCT @ 2.80A	10V @ 5.60A	-
	VDE-56P-24	VDE1-56P-24	VDE2-56P-24	24VCT @ 2.33A	12V @ 4.66A	✓
	VDE-56P-28	VDE1-56P-28	VDE2-56P-28	28VCT @ 2.00A	14V @ 4.00A	-

**Any application, Any requirement, Contact us for our Custom Designs**