

# VFTCM Series OCXO




## Features

- SC-cut crystal
- Through Hole (VFTCM) or SMD (VFTCMS)
- High Stability (up to  $\pm 5 \times 10^{-9}$ )
- Low Aging ( $5 \times 10^{-10}$ /day,  $5 \times 10^{-8}$ /year)
- Low Phase Noise (-160 dBc/Hz, TYP, floor)
- Sine Wave or HCMOS/TTL output
- 4.8 MHz to 180 MHz Frequencies Available



## Applications

- Telecommunication Systems
- Data Communications
- GPS
- Instrumentation

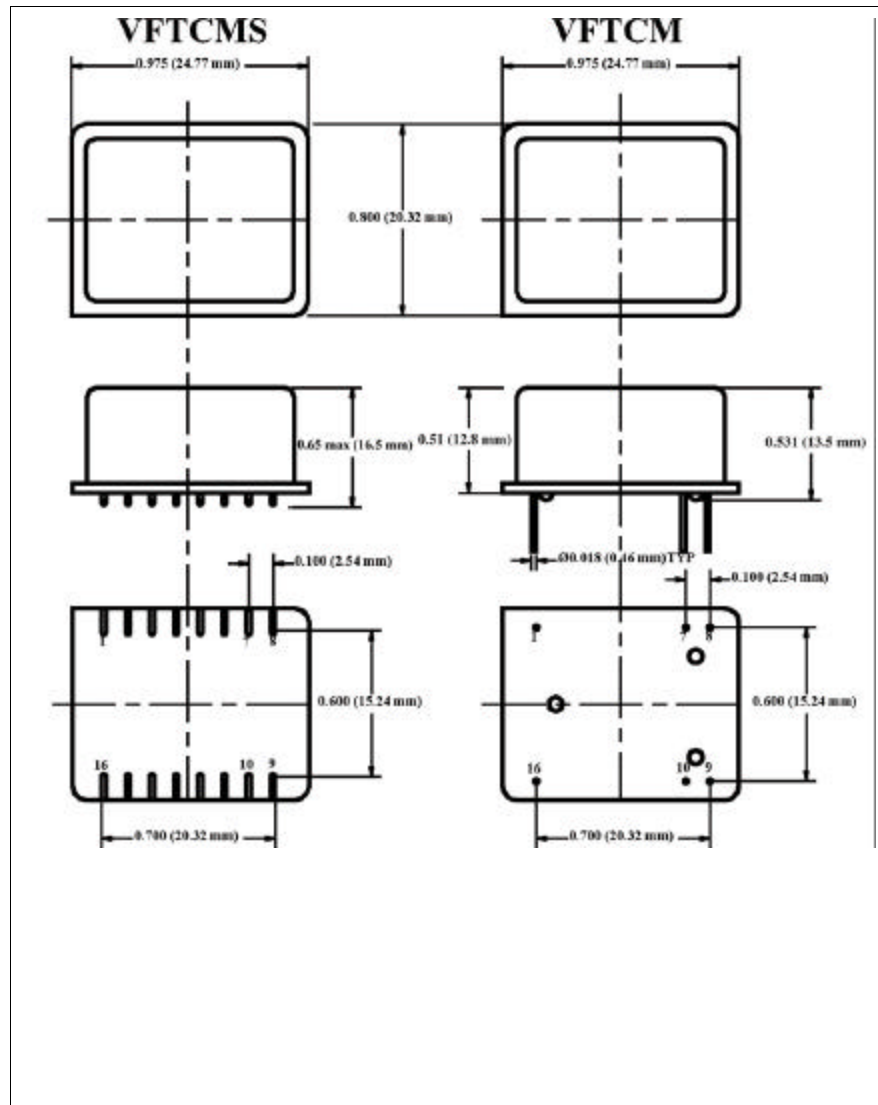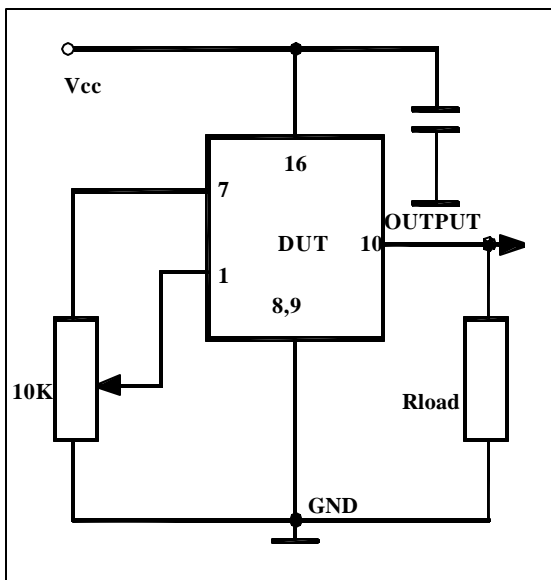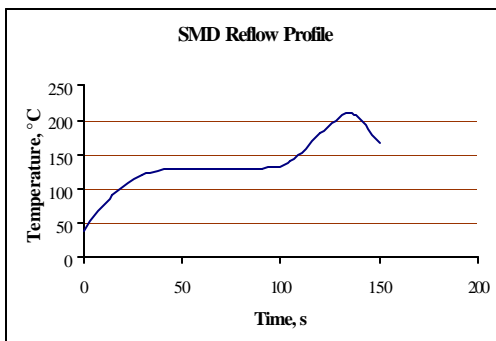

# VFTCM Series OCXO

## Specifications:

Parameter	Symb	Condition	Min	Typ	Max	Unit	Note	
<b>Absolute Maximum Ratings</b>								
Input Break Down Voltage	V <sub>cc</sub>		-0.5		13.0	V		
Storage temper.	T <sub>s</sub>		-40		85	°C		
Control Voltage	V <sub>c</sub>		-1		9	V		
<b>Electrical</b>								
Frequency	F		4.8	10.000	180	MHz		
Frequency stability	?F/F	vs. Temp.		±20		ppb	See chart below	
		vs. Supply		1	5	ppb/V		
Aging		per day		5E-10			after 30 days 5E-8 available	
		per year		1E-7				
Allan Variance		.1s to 10s		1E-11				
SSB Phase Noise		10 Hz		-120		dBc/Hz	At Higher Freq. Deteriorates by 20Log N dB	
		100 Hz		-150				
		10 KHz		-160				
Retrace		After 30 minutes			±20	ppb		
G-sensitivity		worst direction			±1.0	ppb/G		
Input Voltage	V <sub>cc</sub>		4.75	5.0	5.25	V	3.3V, 12V±5% optional	
Power consumption	P	steady state, 25°C		0.8	1	W		
		steady state, -30°C		1.5				
		start-up @ -30°C		2.5				
Load		10KOhm//15pF (HCMOS/TTL), 50 Ohm (Sinewave)						
Warm-up time	?	to 0.1ppm accuracy		2	3	minutes		
Output Waveform		3.3V HCMOS/TTL compatible or Sinewave (>+7dBm)						-25dB Harmonics at sine
Control voltage	V <sub>c</sub>		0		4.0	V	To 2.8V at V <sub>cc</sub> =3.3V	
Pull range		from nominal F	±0.5	±1		ppm	At 10 MHz	
Deviation slope		Monotonic, posit		0.4		ppm/V		
Setability	V <sub>c0</sub>	@25°C, F <sub>nom</sub> .	1.0	2.0	3.0	V		
<b>Environmental and Mechanical</b>								
Operating temp. range	-30°C to 70°C Standard, Other options – see chart below							
Mechanical Shock	Per MIL-STD-202, 30G, 11ms							
Vibration	Per MIL-STD-202, 5G to 2000 Hz							
Soldering Conditions	230°C for 30s Max SMD profile							
<b>Electrical Connections</b>								
Pin Out	Pin #1- V <sub>c</sub> ; Pin #7- V <sub>ref</sub> ; Pin #8, Pin #9 –GND ; Pin#10 – Output; Pin #16 -V <sub>cc</sub>							

All parameters for 10 MHz

## Create a Part Number

