

AC INLETS

■ SPECIFICATIONS

Rating : 2.5A, 250V AC
 Contact Resistance : 50mΩ max.
 Insulation Resistance : 300MΩ min. at DC 500V
 Insulation Withstand Voltage: AC 2,000V for one minute.


■ SPECIFICATIONS

Rating : 2.5A, 250V AC
 Contact Resistance : 50mΩ max.
 Insulation Resistance : 300MΩ min. at DC 500V
 Insulation Withstand Voltage: AC 2,000V for one minute.

■ SPECIFICATIONS

Rating : 7A, 125V AC
 Contact Resistance : 50mΩ max.
 Insulation Resistance : 300MΩ min. at DC 500V
 Insulation Withstand Voltage: AC 2,000V for one minute.

YKE31-019



Approval
 SEMKO, NEMKO, DEMKO,
 FIMKO, SEV

YKE31-010



Approval
 SEMKO, NEMKO, DEMKO,
 SETI, VDE

YKE31-0120



Approval
 UL, CSA

RGB CONNECTORS

■ SPECIFICATIONS

Contact Resistance : 30M Ω max, [50M Ω max(2L TYPE)]
 Insulation Resistance : 10¹⁰MΩ min. at DC 500V
 Insulation Withstand Voltage: AC 800V for one minute
 Pulling Out Force : 1.1~7 kg
 Insertion Force : 11kg Max.

21P RA DS TYPE

YKF41-5020



21P VT DS TYPE

YKF41-5018



21P RA 2L TYPE

YKF41-5019





21P RA 1L TYPE

YKF41-5024



SCART RGB PLUG CABLES

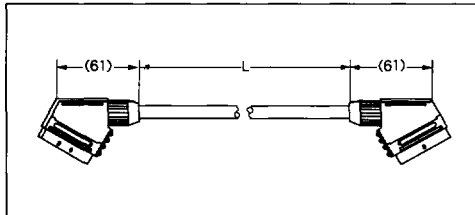


L	Connector	Code
1500	21p-21p	YAF11-0731

RGB/RCA ADAPTORS

■ SPECIFICATIONS


Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Insulation Withstand Voltage: AC500V for one minute

YKS11-0027




PIN-HEADER

YKF24-5001

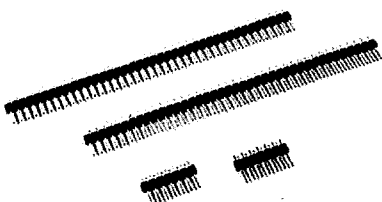

CARD CONNECTORS



SIMM-SOCKET



本カタログ記載の SIMM-SOCKET 仕様以外にも
 DIMM-SOCKET 仕様も標準極数を取り揃えております。

Besides the items in this catalog, we are manufacturing wide
 variation of standard contact items, with DIMM SOCKET.