





MINIATURE ROUND CONNECTORS

- SPECIFICATIONS**  
 Contact Resistance : 30mΩ max.  
 Insulation Resistance : 50MΩ min. at DC 500V  
 Insulation Withstanding Voltage : 250V AC for one minute.

1L TYPE

SPRING SHIELD TYPE




2L TYPE

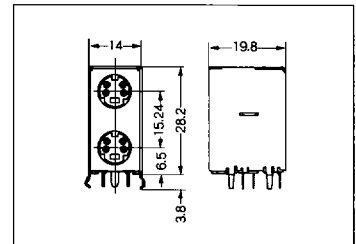

ARRANGEMENT OF CONTACTS							
ON OF CONTACTS	3	4	5	6	7	8	9
1L TYPE with SHIELD	YKF51-5371	YKF51-5372	YKF51-5373	YKF51-5374	YKF51-5375	YKF51-5376	
1L TYPE FULL SHIELD	YKF51-5389	YKF51-5390	YKF51-5391	YKF51-5392	YKF51-5393	YKF51-5394	
1L TYPE SPRING SHIELD	YKF51-5380	YKF51-5381	YKF51-5382	YKF51-5383	YKF51-5384	YKF51-5385	
2L TYPE FULL SHIELD		YKF51-5377					

D-SUB CONNECTORS

- SPECIFICATIONS**  
 Contact Resistance : 15mΩ max.  
 Insulation Resistance : 1000MΩ min. at DC 500V  
 Insulation Withstanding Voltage : 1000V AC for one minute.

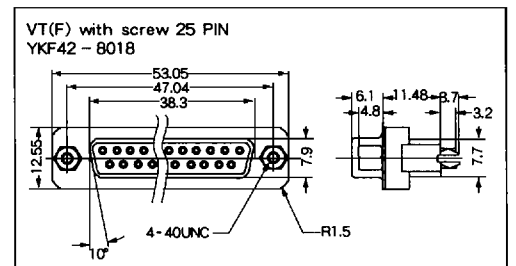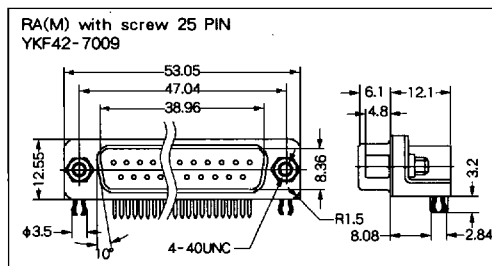

TYPE	OPTION(Hexagon screw)	Code				
		9pin	15pin	25pin	15(HD)pin	
Male	RA	With screw	YKF42-7007	YKF42-7008	YKF42-7009	
		Be attached to screw	YKF42-7501	YKF42-7502	YKF42-7503	
		Without screw	YKF42-7016	YKF42-7017	YKF42-7018	
	VT	With screw	YKF42-7013	YKF42-7014	YKF42-7015	
		Be attached to screw	YKF42-7504	YKF42-7505	YKF42-7506	
		Without screw	YKF42-7019	YKF42-7020	YKF42-7021	
Female	RA	With screw	YKF42-8010	YKF42-8011	YKF42-8012	YKF42-8020
		Be attached to screw	YKF42-8501	YKF42-8502	YKF42-8503	YKF42-8508
		Without screw	YKF42-8021	YKF42-8022	YKF42-8023	YKF42-8028
	VT	With screw	YKF42-8016	YKF42-8017	YKF42-8018	YKF42-8019
		Be attached to screw	YKF42-8504	YKF42-8505	YKF42-8506	YKF42-8507
		Without screw	YKF42-8024	YKF42-8025	YKF42-8026	YKF42-8027

本カタログ記載の仕様以外にも多種取り揃えております。

Besides the items in this catalog, we are manufacturing wide variation of items.

弊社、営業部までお問い合わせ下さい。

Please contact to our sales department.