


Straight Plug

CA3106R-B designates a straight plug with short endbell, without cable clamp

CA3106R-B and Modification

Modifications see page 10

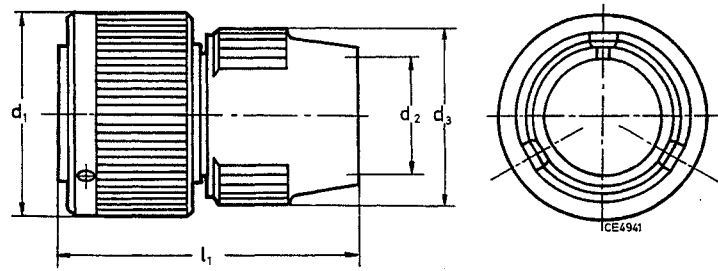

Dimensions in mm

Cannon Part No.	d_1 max	$d_2^{2)}$	d_3 max	l_1 max	Weight g max
CA3106R10SL-**-B-***	22,80	9,60	22,00	50,00	27
CA3106R12S-**-B-***	26,00	10,30	23,00	50,00	35
CA3106R14S-**-B-***	29,20	12,40	27,00	50,00	40
CA3106R16S-**-B-***	32,00	15,40	28,00	50,00	50
CA3106R16-**-B-***	32,00	15,40	28,00	60,00	57
CA3106R18-**-B-***	36,50	18,40	31,00	62,00	65
CA3106R20-**-B-***	39,90	22,00	35,00	62,00	80
CA3106R22-**-B-***	43,10	24,70	38,00	62,00	87
CA3106R24-**-B-***	46,60	27,60	42,00	62,00	120
CA3106R28-**-B-***	53,40	31,60	49,00	62,00	150
CA3106R32-**-B-***	60,10	38,50	55,00	62,00	190
CA3106R36-**-B-***	66,30	44,50	62,00	62,00	250

Dimensions in inches

Cannon Part No.	d_1 max	$d_2^{2)}$	d_3 max	l_1 max	Weight g max
CA3106R10SL-**-B-***	.898	.378	.866	1.969	27
CA3106R12S-**-B-***	1.024	.406	.906	1.969	35
CA3106R14S-**-B-***	1.150	.488	1.063	1.969	40
CA3106R16S-**-B-***	1.260	.606	1.102	1.969	50
CA3106R16-**-B-***	1.260	.606	1.102	2.362	57
CA3106R18-**-B-***	1.437	.724	1.220	2.441	65
CA3106R20-**-B-***	1.571	.866	1.378	2.441	80
CA3106R22-**-B-***	1.697	.972	1.496	2.441	87
CA3106R24-**-B-***	1.835	1.087	1.654	2.441	120
CA3106R28-**-B-***	2.102	1.244	1.929	2.441	150
CA3106R32-**-B-***	2.366	1.516	2.165	2.441	190
CA3106R36-**-B-***	2.610	1.752	2.441	2.441	250

²⁾ For max. cable entry.