

Surface Mount Clock Oscillator

- Tristate capable
- 1.7 mm height

Series **CC065S**

Part Numbering Example: CC065S Z - A2 B2 45 - 33.333 TS

CC065S**SERIES**

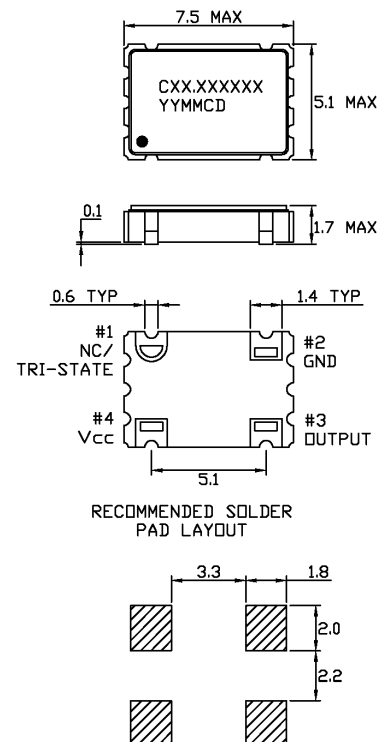
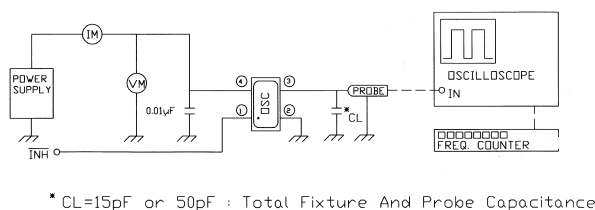
CC065S

Z**ADDED FEATURES**BLANK = BULK PACK
Z = TAPE AND REEL**A2****OPERATING TEMP.**Blank = 0°C ~ +70°C
A2 = -40°C ~ +85°C**B2****STABILITY**Blank = ±100 ppm
B2 = ± 50 ppm**45****SYMMETRY**Blank = 40/60%
45 = 45/55%**33.333****FREQUENCY****TS****TRI STATE**

Tri State Standard

Specifications:

Frequency Range:	1.8432 MHz to 125.000 MHz
Available Stability Options:	±100 ppm <i>Standard</i> ±50 ppm
Output Series:	HCMOS
Input Voltage:	+5.0 VDC ±10%
Operating Temperature Range Options:	-10°C to +70°C <i>Standard</i> -40°C to +85°C
Output Voltage:	V _{OL} = 0.5 V Max. V _{OH} = 4.5 V Min.
Output Load:	10 LS TTL, 15 pF CMOS
Maximum Input Current:	25 mA (1.8432 to 31.999 MHz) 35 mA (32.000 to 70.000 MHz)
Maximum Rise/Fall Time:	10 ns
Duty Cycle:	40/60% 45/55%
Max. Start-Up Time:	10 ms
Tristate Input:	+0.80 VDC Max. to Disable +3.60 VDC Min. to Enable or open to Enable
Storage Temperature:	-55°C to +125°C
Packaging:	Tape and Reel (1K per Reel)

CC065S**TEST CIRCUIT****OUTPUT WAVE FORM**