

Crystal Clock Oscillator **NEW**

NZ2520S Series

Model name

NZ2520SB Frequency stability of $\pm 50 \times 10^{-6}$.

Application

- For compact mobile information equipment, such as DVC, DSC, notebook PC, and PDA



Pb Free

RoHS Compliant
Directive 2002/95/EC

Features

- Compact and light. Dimensions and weight: 2.5 x 2.0 mm, 0.9 mm, and 0.02 g.
- This crystal clock oscillator can support low frequencies (from 1.5 MHz); an achievement not easy for other crystal oscillators of the same size to equal.
- Automatic mounting by taping and IR reflow (lead-free) are possible.
- Lead-free.

Absolute maximum rating
Power supply voltage (V_{DD}) -0.5 to $+4.0$ V
Storage temperature range -55 to $+125$ °C

Specifications

| Item | Model | NZ2520SB | | | | | | | | | |
|---|----------------------|-------------------------|------------------|------------------|------------------|------------------|------------------|------------------|---------------------|-----|-----|
| Output level | | C-MOS | | | | | | | | | |
| Frequency range ^{*1} | (MHz) | $1.5 \leq F < 10$ | $10 \leq F < 20$ | $20 \leq F < 30$ | $30 \leq F < 40$ | $40 \leq F < 50$ | $50 \leq F < 60$ | $60 \leq F < 70$ | $70 \leq F \leq 80$ | | |
| Operating temperature range ^{*2} | (°C) | -40 to $+85$ | | | | | | | | | |
| Frequency Stability | ($\times 10^{-6}$) | ± 50 | | | | | | | | | |
| Current consumption max | During operation | +3.3 V, 25 °C | (mA) | 3.5 | 4.5 | 5.0 | 5.5 | 6.0 | 7.0 | 8.0 | 9.0 |
| | During standby | +3.3 V, 25 °C | (μ A) | 10 | | | | | | | |
| $V_{OL\ max}/V_{OH\ min}$ | (V) | $0.1 V_{DD}/0.9 V_{DD}$ | | | | | | | | | |
| $T_r\ max/T_f\ max$ | (ns) | 5/5 | | | | | | | | | |
| Duty Cycle min. to max. | (%) | 45 to 55 | | | | | | | | | |
| Load (C_L) max | (pF) | 15 | | | | | | | | | |
| Oscillation start time max | (ms) | 4 | | | | | | | | | |
| Standby function | | Available (tristate) | | | | | | | | | |

*1: If you require a product with a frequency not given above, please contact us.


*2: If you require a product with an operating temperature range not given above, please contact us.

List of Codes for Placing an Order


| | | |
|------------------------------------|-----|-----------------|
| List of Codes for Placing an Order | | NSA3415E |
| Power supply voltage [V_{DD}] | (V) | $+3.3 \pm 0.33$ |

NZ2520S Series

■ Dimensions

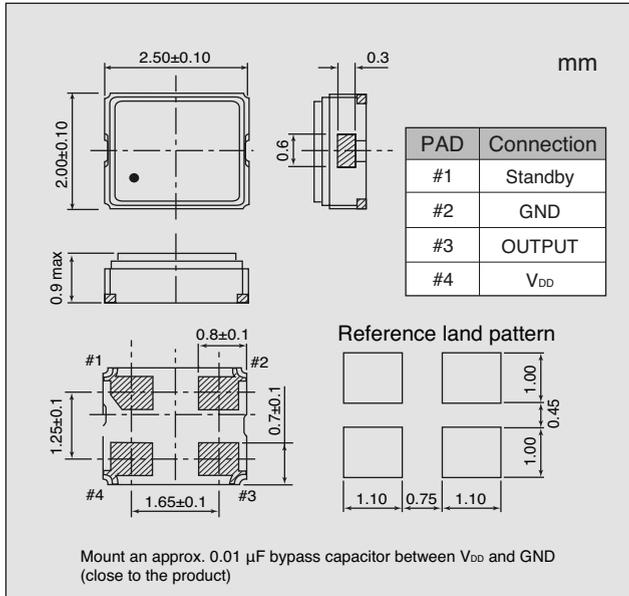

■ Output Waveform <C-MOS>

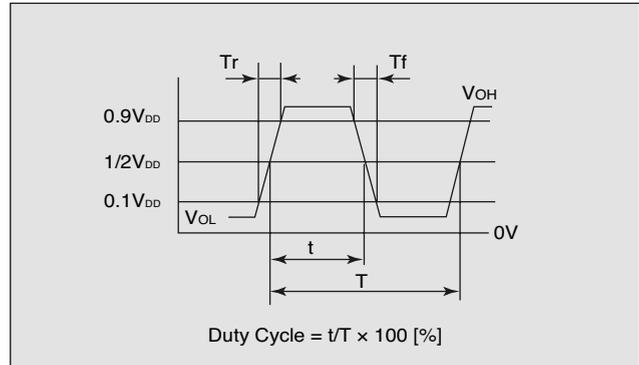

■ Standby Function

| #1 Input | #3 Output |
|--|-----------------------|
| Level H ($0.7 V_{DD} \leq V_{IH} \leq V_{DD}$) or OPEN is selected. | Oscillation output ON |
| Level L ($V_{IL} \leq 0.3 V_{DD}$) is selected. | High impedance |

■ How to Specify an Order

When ordering our products, specify them with an "Ordering Code" that consists of the following:

Model name – Frequency (up to 9 digits) M – Number for specifying an order

Example : When ordering a product with model name: NZ2520SB, frequency: 20 MHz, frequency stability: $\pm 50 \times 10^{-6}$,
and power supply voltage: 3.3 V
Ordering Code: NZ2520SB – 20.000000M – NSA3415E

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>).