



SM7012-CRx Right Angle GBIC Connectors

Thru Hole Solder Connectors for Giga Bit Interface Converters

FEATURES

- UL Recognized / CSA Certified
- Solder and aqueous wash compatible
- Compatible with wave solder and IR reflow
- Integral PCB retention and ESD protection feature
- Options for 0.062" and 0.093" thick PCB's
- Gold plated contacts for high mating cycle durability
- 100% electrically tested for proper mating sequence

APPLICATIONS

The Stratos Lightwave SM7012-CRx GBIC (Giga Bit Interface Converter) connectors provide interconnection solutions for all of the standard GBIC implementations per SFF 8053 rev 5.2a for switch, server, disk drive and other short range and long range data communications applications.

These GBIC guide rails are suitable for Fibre Channel, Gigabit Ethernet and other GBIC applications as defined in the SFF 8053 document.

DESCRIPTION

The SM7012-CRx GBIC connectors enable a host platform to support a wide variety of cable media types and transmission ranges by plugging in the desired interface converter per the SFF 8053 specification. The integral ESD ground strap and alignment system enables blind mating, hot plugging and provides a secure connection path to system / chassis ground.

Stratos offers a complete line of GBIC modules and guide rails for optical fiber and copper cable media interfaces. For the latest specifications of alternate Stratos GBIC components please consult the Stratos Lightwave website.

ORDERING INFORMATION

Application	PCB	Part Number
Right Angle Connector	1.6mm / 0.062"	SM7012-CR1
Right Angle Connector	2.4mm / 0.093"	SM7012-CR2


SM7012-CRx

Right Angle GBIC Connectors

Thru Hole Solder Connectors for Giga Bit Interface Converters

RIGHT ANGLE GBIC CONNECTOR

Dimensions Are Shown As: $\frac{\text{mm}}{\text{inches}}$

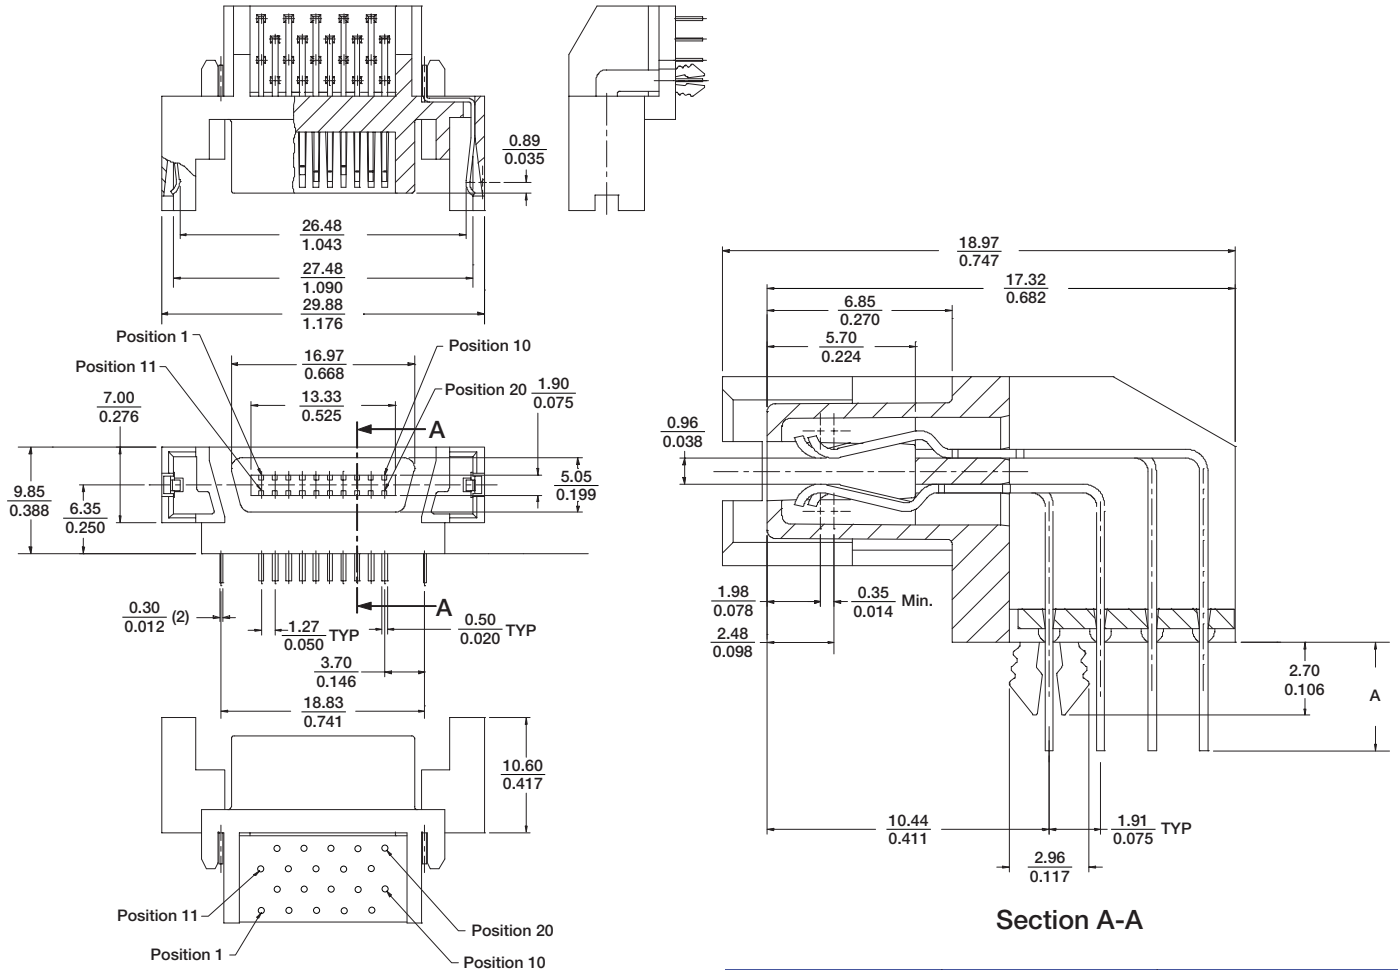

Section A-A

Part Number	PCB	Dimension A
SM7012-CR1	1.6mm / 0.062"	2.50mm / 0.098"
SM7012-CR2	2.4mm / 0.093"	3.70mm / 0.146"

IMPORTANT NOTICE

Stratos Lightwave reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice. Stratos Lightwave recommends that its customers to obtain the latest version of the publications to verify, before placing orders, that the information being relied on is current. Stratos Lightwave warrants performance of its optical link products to current specifications in accordance with the Stratos Lightwave standard warranty. Testing and other quality control techniques are utilized to the extent that Stratos Lightwave has determined it to be necessary to support this warranty. Specific testing of all parameters of each optical link product is not necessarily performed on all optical link products. Stratos Lightwave products are not designed for use in life support appliances, devices, or systems where malfunction of a Stratos Lightwave product can reasonably be expected to result in a personal injury. Stratos Lightwave customers using or selling optical link products for use in such applications do so at their own risk and agree to fully indemnify Stratos Lightwave for any damages resulting from such improper use or sale. Stratos Lightwave assumes no liability for Stratos Lightwave applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does Stratos Lightwave warrant or represent that a license, either expressed or implied is granted under any patent right, copyright, or intellectual property right, and makes no representations or warranties that these products are free from patent, copyright, or intellectual property rights. Applications that are described herein for any of the optical link products are for illustrative purposes only. Stratos Lightwave makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.



1450 Treeland Blvd., S.E., Palm Bay, FL 32909-2211 USA
Telephone: 321-308-4100 Fax: 321-308-0434
Web Page: www.stratoslightwave.com

SM7012-CRx


Right Angle GBIC Connectors

Thru Hole Solder Connectors for Giga Bit Interface Converters

GBIC Guide Rail Printed Circuit Board Layout

Top Side Shown

Dimensions Are Shown As: $\frac{\text{mm}}{\text{inches}}$

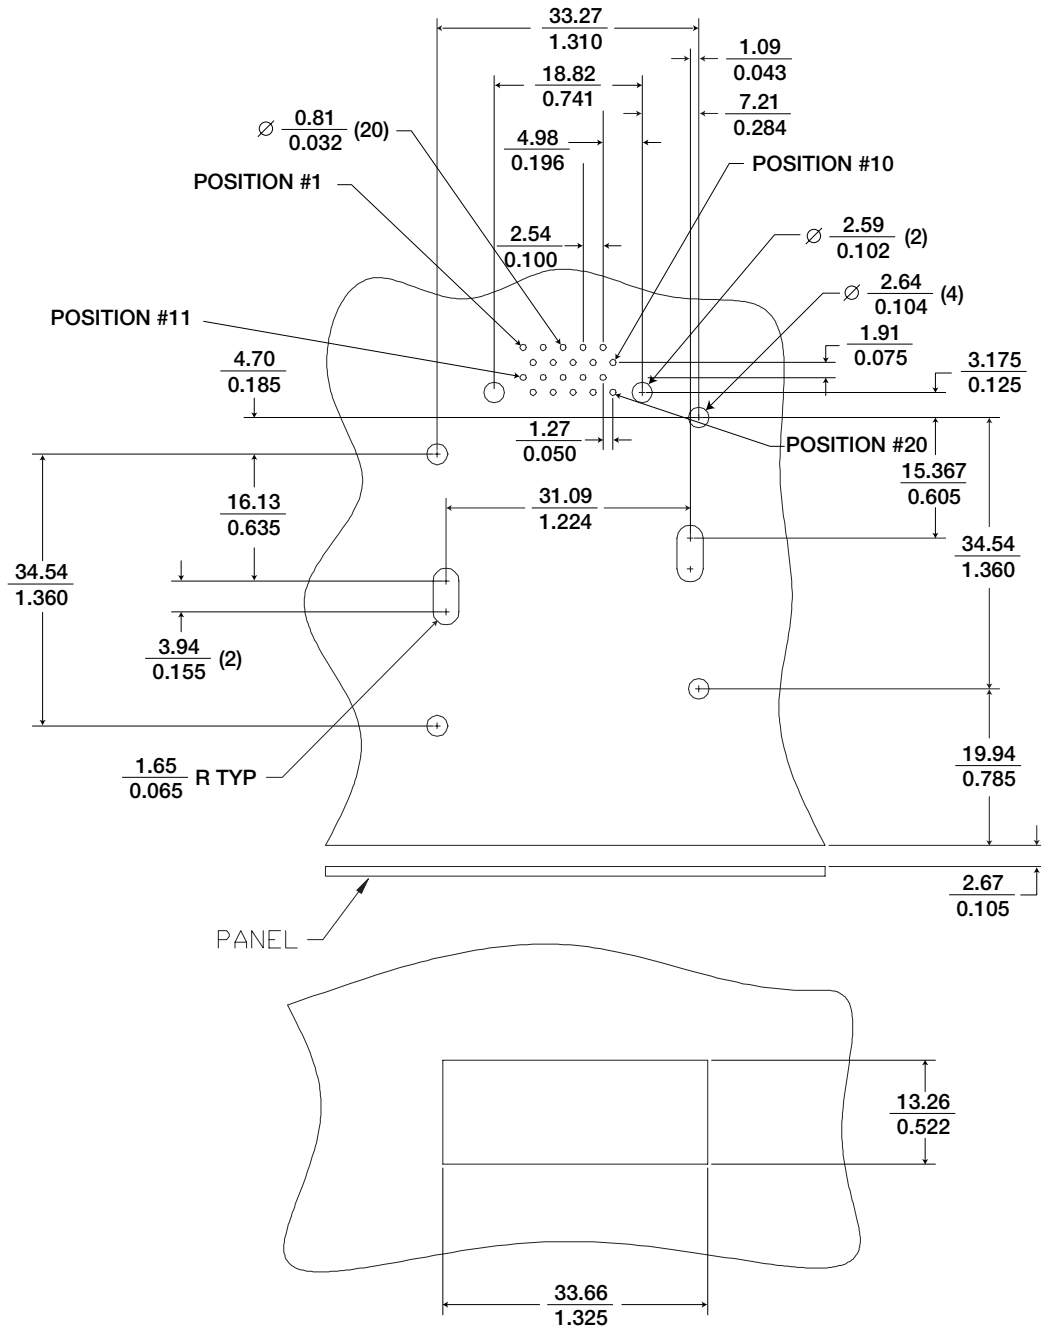

SM7012-CRx

Right Angle GBIC Connectors

Thru Hole Solder Connectors for Giga Bit Interface Converters

PRODUCT SPECIFICATIONS

MECHANICAL	PARAMETER
Durability	100 cycles of mating & unmating
Contact Positions	11 thru 14 and 17 thru 20 are positioned to provide first mating 1 thru 10, 15 and 16 are positioned to provide second mating
MATERIALS	PARAMETER
Insulators	Liquid Crystal Polymer, Black, UL-94 V-0
Contacts	Phosphor Bronze
Retention Clips	Phosphor Bronze
PLATINGS	PARAMETER
Mating Contacts	0.00127mm Min. Nickel Underplate All Over 0.00076mm Min. Gold Plate in Contact Area 0.00381mm Min. 90/10 Tin/Lead in Solder Area
Retention Clip	0.00127mm Min. Nickel Underplate All Over 0.00381mm Min. 90/10 Tin/Lead All Over
ELECTRICAL	PARAMETER
Voltage Rating	250 VAC
Current Rating	1.0 Amp
Contact Resistance	20 mOhms Max.
DWV	750 VAC for 1 Minute
Insulation Resistance	1000 MOhms
ENVIRONMENTAL	PARAMETER
Operating Temperature	-40 to 105 Degrees C



File Number: E209124