

SKBI 64/H7/F24


(IEC)	rigid	flexible	I	U	
[mm ²]	solid	stranded	AWG	[A]	[V]
Connection data	0.2-4	0.2-2.5	24-10		
H7 contacts				15 ¹⁾	500 ²⁾
F24 contacts				6 ¹⁾	125 ²⁾

¹⁾ Please observe the load diagram

²⁾ Surge voltage category III/contamination class 2

Description	Type	Order No.	Pcs. Pkt.
Plug-in card block , with screw connection terminal blocks MKDS 3 and H15 high current socket strip for indirect connection in accordance with IEC 603/DIN 41 612, complete with guide rails, engagement catches and ejector, with standardized labelling on both connection sides, as well as fixing screws M 4, with screw connection terminal blocks MKDS 3 and mixed position socket strip H7/F24	SKBI 64/H7/F24	22 69 32 8	1

Accessories

(1) **Snap foot**, for horizontal or vertical mounting of the plug-in card blocks on the  mounting rail

**SF-SKBI 64****22 63 00 7**

5

(2) **Screwdriver**, blade: 0.6 x 3.5 x 100 mm, length: 180 mm


**SZS 0,6 x 3,5****12 05 05 3**

10

Technical data

Dimensions		see description
Blade		4.8 x 0.8
Current	[A]	15
Stripping length	[mm]	8
Thread		M 3
Torque	[Nm]	0.5 - 0.6

Dimensional drawing

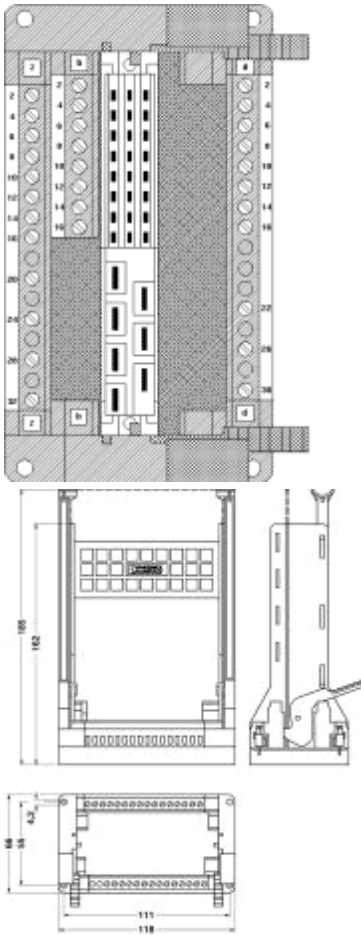

Diagram

