

# Metal Film Resistors, Pulse Withstanding Protective



## FEATURES

- Special Vishay Dale design provides lightning withstanding characteristics along with resistor functionality
- A thicker tin oxide power film system provides lightning surge absorption capabilities
- Higher turns ratio and glass substrate provide sharper fusing characteristic than the standard flameproof product line
- Protect against a variety of electrical hazards which can change or destroy sensitive electronic equipment including high energy voltage surges caused by power line anomalies (direct power crosses or inductively coupled effects) and other momentary overvoltages
- Compliant to RoHS directive 2002/95/EC



RoHS+  
COMPLIANT

## STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{70\text{ }^\circ\text{C}}$ W	RESISTANCE RANGE $\Omega$	TOLERANCE $\pm \%$	CUTOFF VALUE
FP1/2P	FP1/2P	0.5	10 to 1M	1, 2, 5	2K00
FP001P	FP1P	1	10 to 1M	1, 2, 5	1K00
FP002P	FP2P	2	9 to 1.5M	1, 2, 5	300R
FP003P	FP3P	3	9 to 1M	1, 2, 5	250R
FP069P	FP69P	2	2.6 to 1M	1, 2, 5	400R

### Notes

- Pulse withstanding capabilities are value dependent
- Value above the cutoff value, shown above, will meet all the surge test requirements shown on next page

## MARKING

- DALE
- Value
- Tolerance
- Style and case size
- Date code (year/week)

## GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: FP002P1K00F9256B8 (preferred part numbering format)

F P 0 0 2 P 1 K 0 0 F 9 2 5 6 B 8

GLOBAL MODEL (see Standard Electrical Specifications table)	RESISTANCE VALUE	TOLERANCE CODE	SPEC CODES	PACKAGING <sup>(1)</sup>
	R = $\Omega$ K = $k\Omega$ M = $M\Omega$ 10R0 = 10 $\Omega$ 1K30 = 1.3 $k\Omega$ 1M00 = 1.0 $M\Omega$	F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$	5555 = FP1/2P 6206 = FP001P 9256 = FP002P 9303 = FP003P 7532 = FP069P	EK = Lead (Pb)-free, strip EA = Lead (Pb)-free, T/R  B8 = Tin/lead, strip CH = Tin/lead, T/R (750 pieces) CJ = Tin/lead, T/R (1000 pieces)

Historical Part Number: FP2P 1K00 1% B8 (will continue to be accepted)


FP2P	1K00	1%	B8
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING

### Note


<sup>(1)</sup> Some packaging codes are model specific

\* Pb containing terminations are not RoHS compliant, exemptions may apply


**DIMENSIONS** in inches (millimeters)

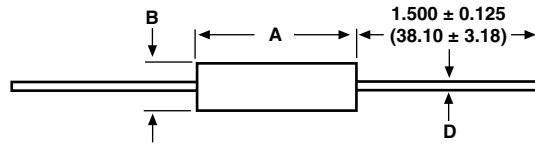

GLOBAL MODEL	DIMENSIONS in inches (millimeters)		
	A	B	D
FP1/2P	0.360 ± 0.020 (9.14 ± 0.51)	0.138 + 0.012 - 0.023 (3.51 + 0.31 - 0.58)	0.032 ± 0.002 (0.81 ± 0.05)
FP001P	0.560 ± 0.031 (14.22 ± 0.79)	0.190 + 0.007 - 0.015 (4.83 + 0.18 - 0.38)	0.032 ± 0.002 (0.81 ± 0.05)
FP002P	0.687 ± 0.031 (17.45 ± 0.79)	0.300 ± 0.020 (7.62 ± 0.51)	0.032 ± 0.002 (0.81 ± 0.05)
FP003P	0.900 ± 0.055 (22.86 ± 1.40)	0.300 ± 0.020 (7.62 ± 0.51)	0.032 ± 0.002 (0.81 ± 0.05)
FP069P	0.516 ± 0.021 (13.11 ± 0.53)	0.225 ± 0.012 (5.72 ± 0.31)	0.032 ± 0.002 (0.81 ± 0.05)

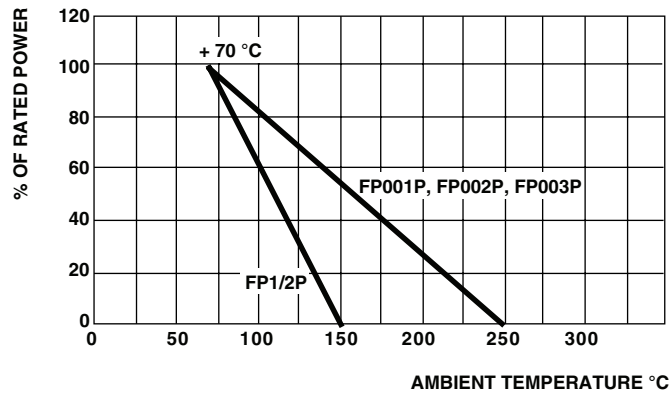

**DERATING**

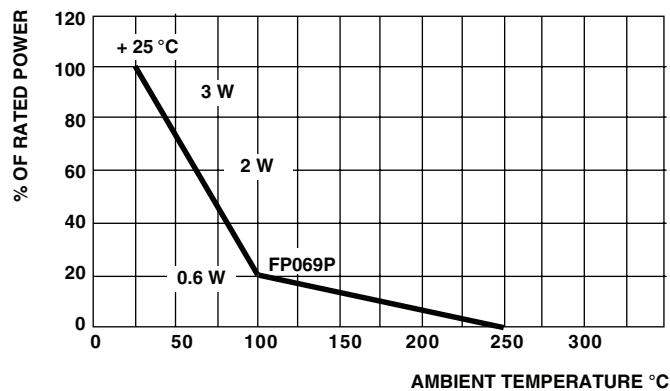

**DERATING**




**LIGHTNING PULSE WAVE FORMS**


Lightning pulse wave forms are defined by three numbers:

- Maximum time to reach peak voltage level (typically 10  $\mu$ s).
- Minimum time for voltage to decrease to half value.
- The peak voltage level.


Three examples are shown below.

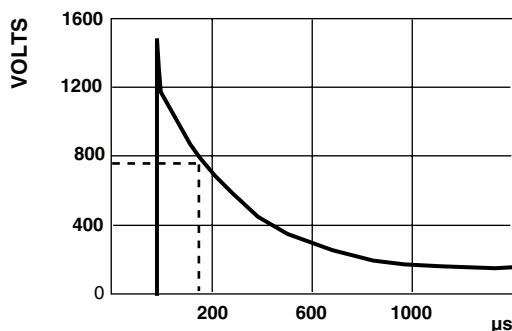

10 by 160 V to 1500 V FCC - Longitudinal Surge



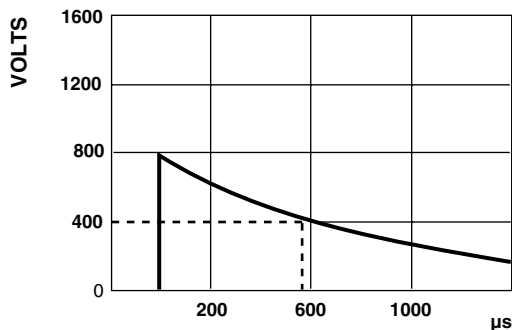


10 by 560 V to 800 V FCC - Metallic Surge

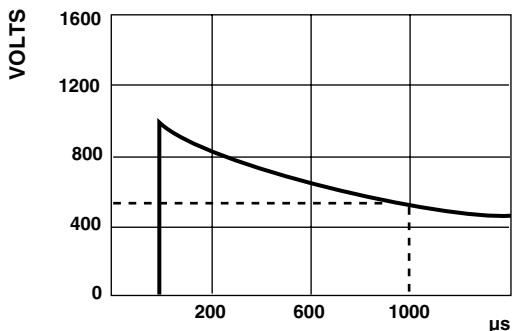

10 by 1000 V to 1000 V REA - Current Surge

These graphs show the relationship value and pulse withstanding voltage for FP1/2P thru FP003P using a 1.0 % resistance shift after 10 pulses as the figure of merit. The stable operating region of each package is on the right side of the appropriate line.

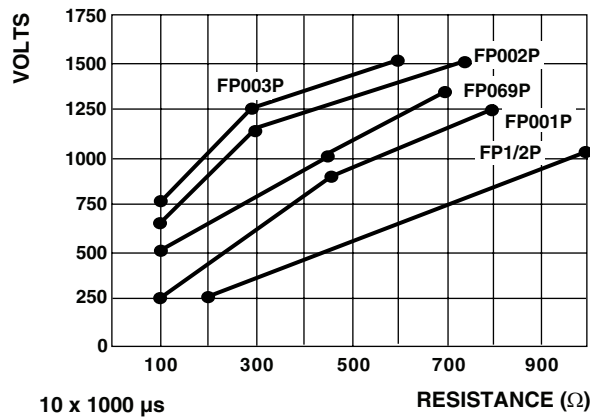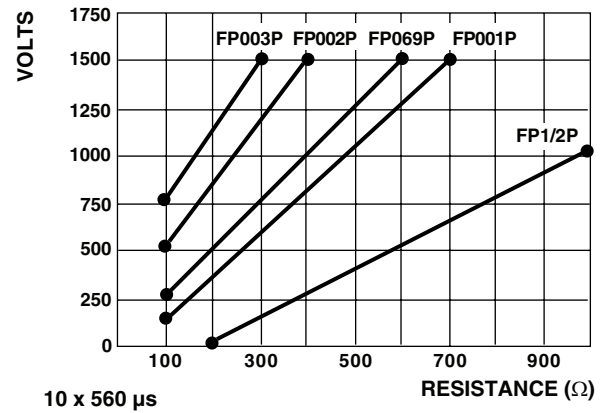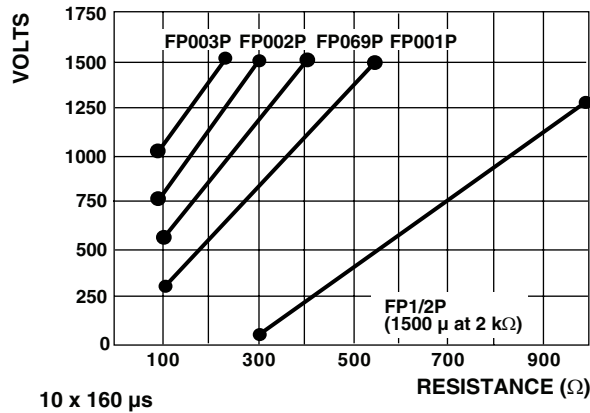

<b>PACKAGING</b>			
GLOBAL MODEL	PACKAGING TYPE	PACKAGING CODE	
		LEAD (Pb)-BEARING	LEAD (Pb)-FREE
FP1/2P, FP001P, FP069P	Strip	B8	EK
	Tape/reel	CJ	EA
FP002P, FP003P	Strip	B8	EK
	Tape/reel	CH	EA



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.